


0.4mm Pitch 5908 Series




0.4mm ピッチ 嵌合高さ 2.0mm SMT
0.4mm Pitch, Stacking Height=2.0mm, SMT

003A-2507-1
004B-2507-0


●Plug

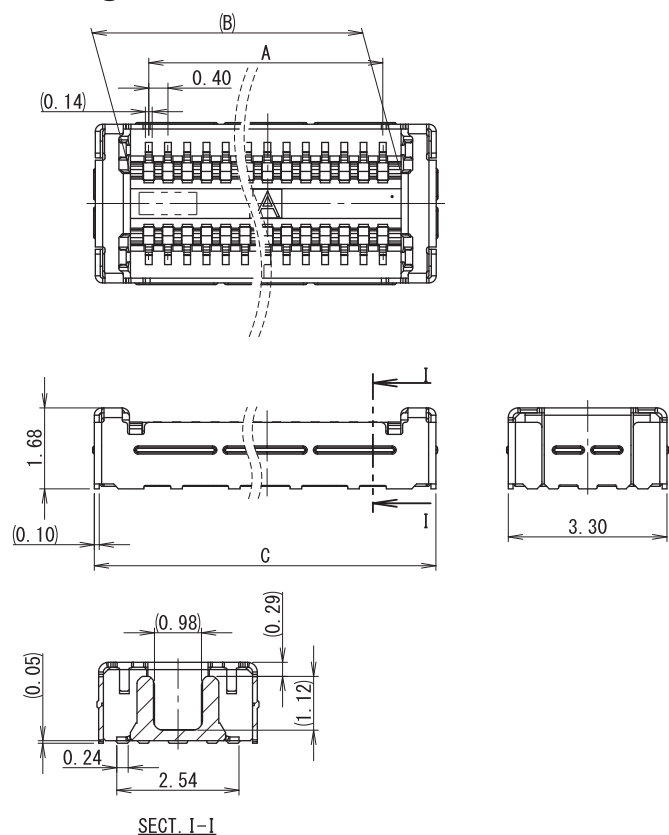

●Receptacle



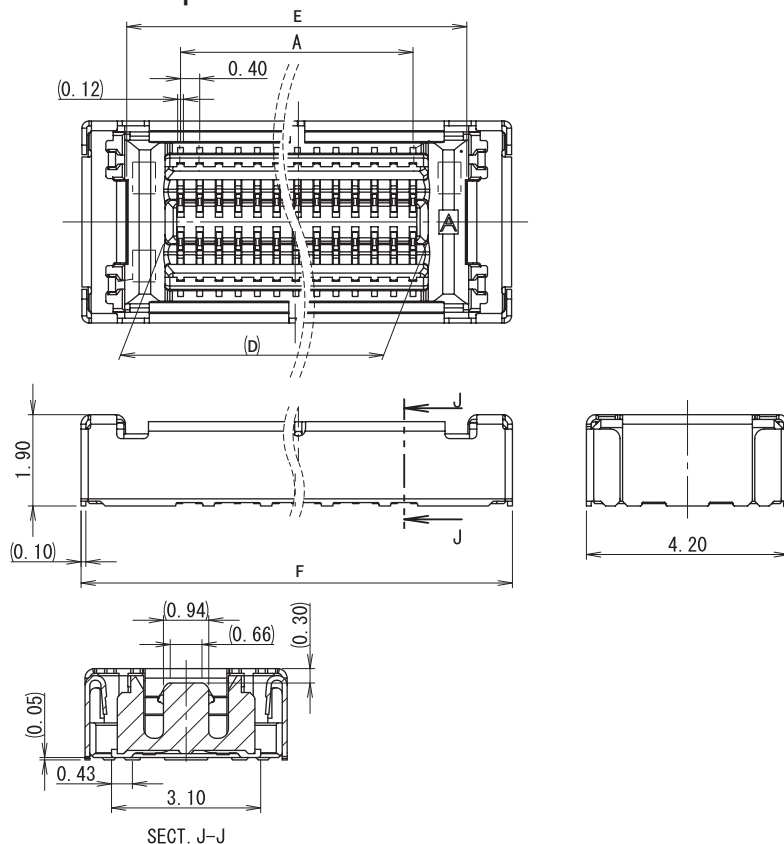


MATING CONDITION



極 数 NO. OF POS.	A	B	C	D	E	F	X	Y
20	3.6	4.36	5.82	4.24	5.84	7.7	6.17	8.05
24	4.4	5.16	6.62	5.04	6.64	8.5	6.97	8.85
26	4.8	5.56	7.02	5.44	7.04	8.9	7.37	9.25
30	5.6	6.36	7.82	6.24	7.84	9.7	8.17	10.05
34	6.4	7.16	8.62	7.04	8.64	10.5	8.97	10.85
40	7.6	8.36	9.82	8.24	9.84	11.7	10.17	12.05
50	9.6	10.36	11.82	10.24	11.84	13.7	12.17	14.05

●Packaging

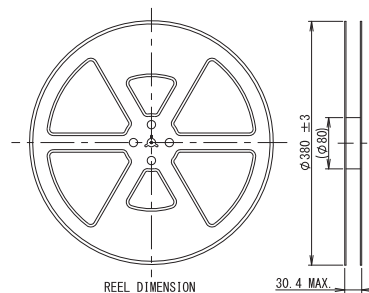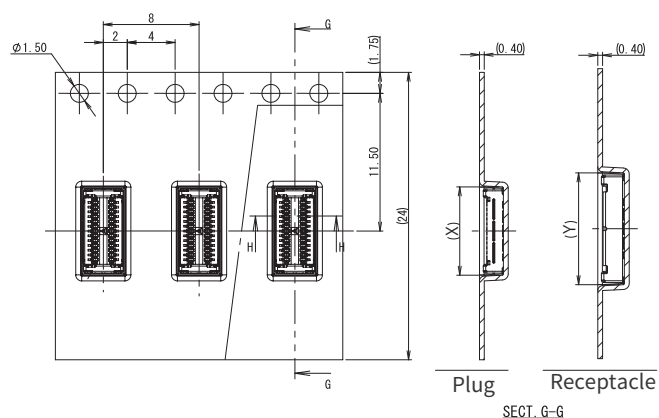

注文コード Ordering Code

Part No. **X4 5908 OXX 000 829+**

1: Plug

2: Receptacle

極数 No. of Pos.

RoHS 対応品
RoHS Compliant Product

梱包数量: 4,000 個 / リール
PACKING QUANTITY: 4,000/Reel

本カタログには推奨めっきを掲載しております。めっき種類・仕様、ならびに生産対応可能極数については営業部にご確認願います。
Recommended plating types are mentioned in this catalogue. For other plating types and their specifications, and available numbers of positions, please feel free to contact our sales department.