
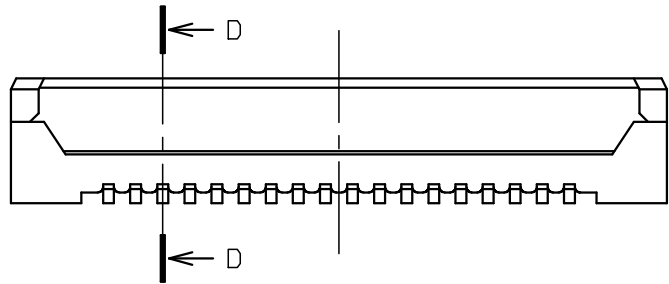
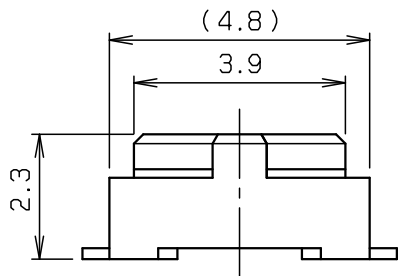
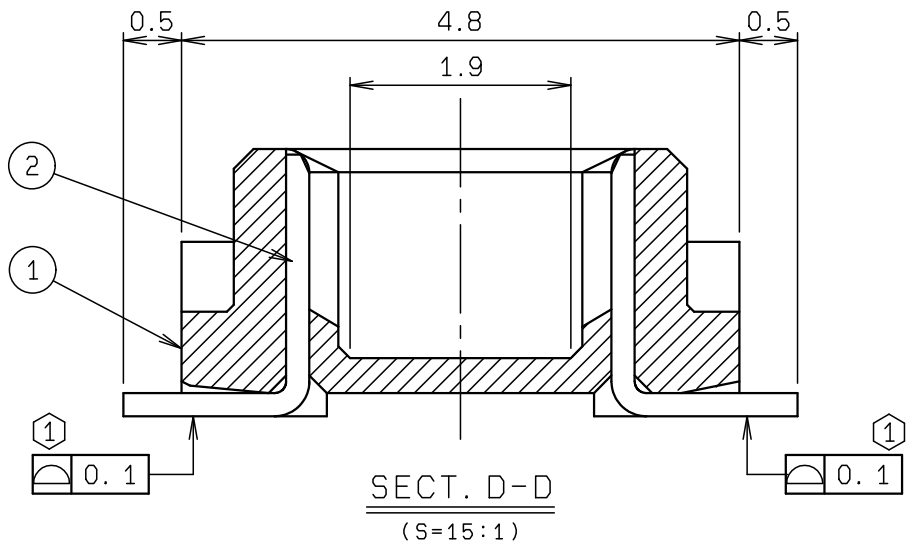
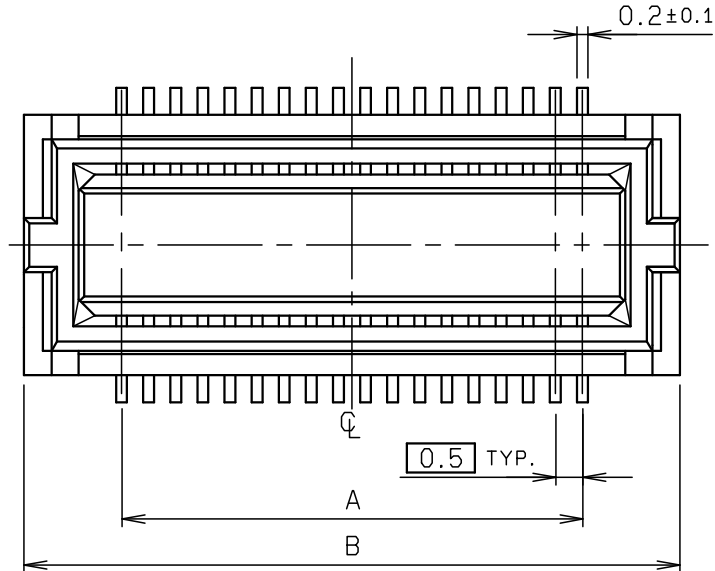



NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	LCP		COLOR :BLACK
2	CONTACT		N	PHOS-BRONZE		NI UNDERCOAT AU PLATTED
3	VACUUM TAPE		1	HEAT-RESISTING TAPE		

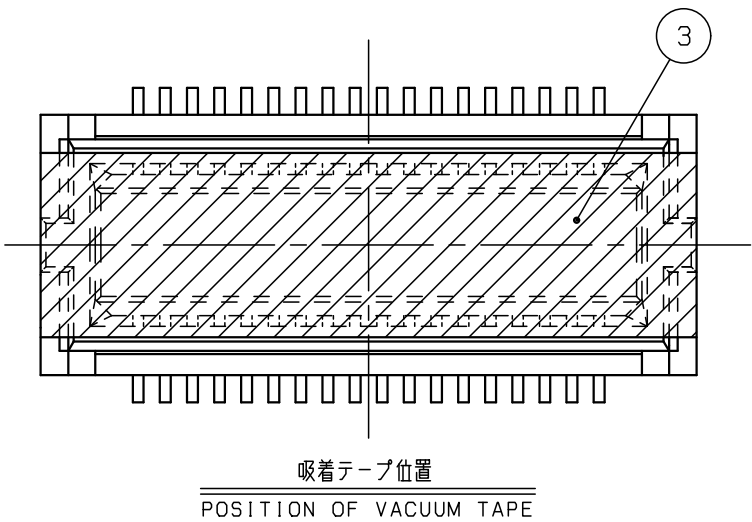

注 記
NOTE
① コンタクトの輪郭度は0.1MAX.
COPLANARITY OF CONTACT TAIL IS
0.1 MAX.
※この注記は1ページ目のみ適用
※THIS NOTES IS APPLICABLE TO
SHEET-1 ONLY.

極 数 NO. OF POS.	A	B
20	4.5	8.1
30	7.0	10.6
40	9.5	13.1
50	12.0	15.6
60	14.5	18.1
70	17.0	20.6
80	19.5	23.1
90	22.0	25.6
100	24.5	28.1
110	27.0	30.6
120	29.5	33.1

※この表は1ページ目のみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 ONLY.

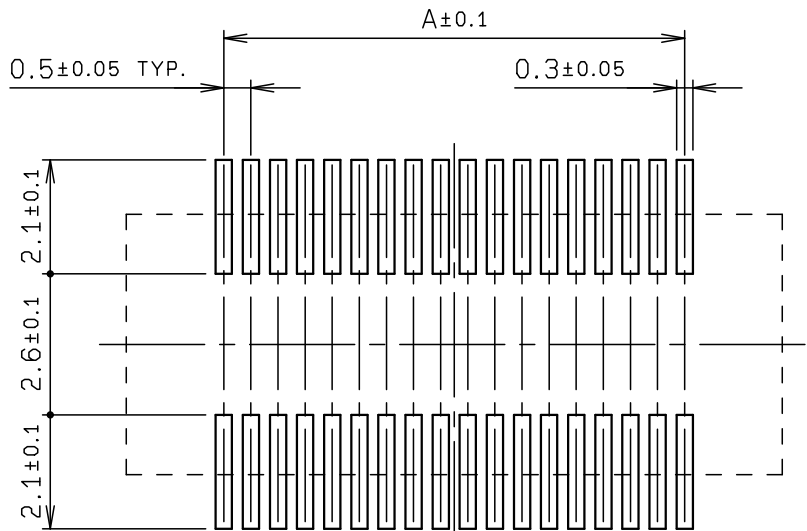

基板取付け寸法
MOUNTING LAYOUT

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		C	DCN-889	2017/12/06			
X <10 ±0.2				B	DCN-997	2005/07/28	A. TSUNEMURA	Y. SHIROYAMA	N. HAYASHI
10 ≤ X <30 ±0.25		UNIT mm		O	EDN-309	1999/05/17	K. MIWA	A. FUKUOKA	M. SAKAOKA
30 ≤ X ±0.3		ANGLE 3RD		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE 7 : 1		PART NAME / 品名					
		DATE 1999/05/17		SERIES 5046 PLUG ASSY ST SMT					
DRAWN K. MIWA		DESIGNED K. MIWA		BOARD TO BOARD H=3.0 WITHOUT ANCHOR PLATE					
CHECKED A. FUKUOKA		APPROVED M. SAKAOKA		PART NO. / 型番					
				14 5046 XXX X30 829 +					
				DWG NO. / 図番					
				BJS 5046032					
				SHEET REV					
				1 1/2 C					

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

