

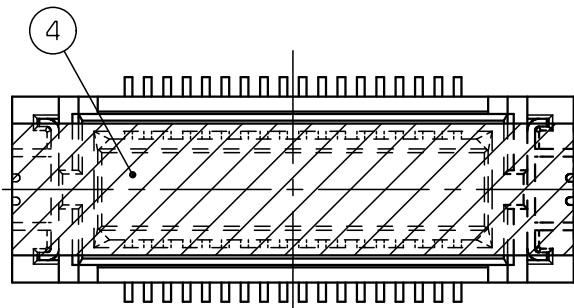
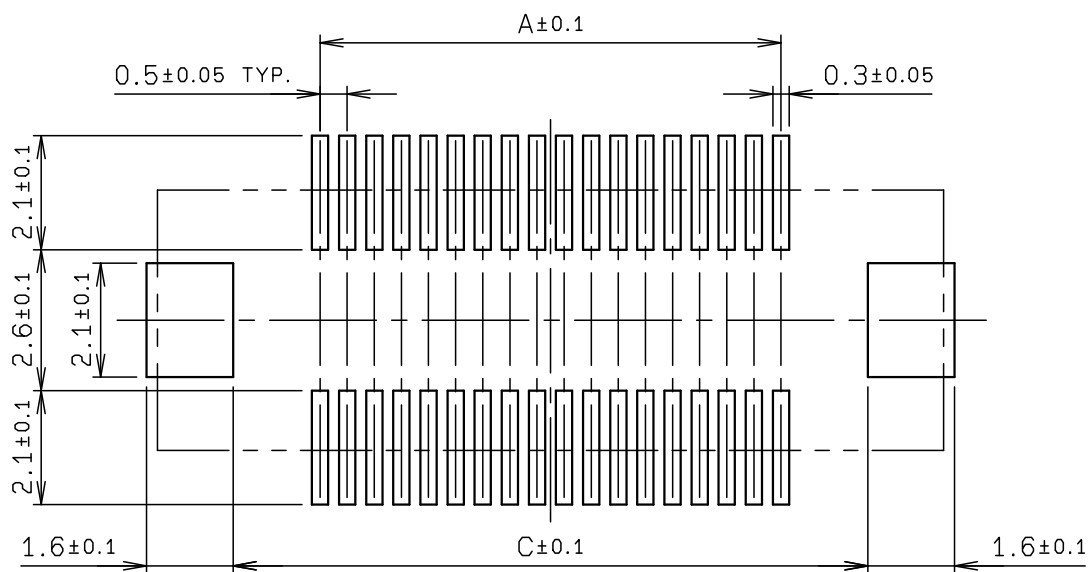
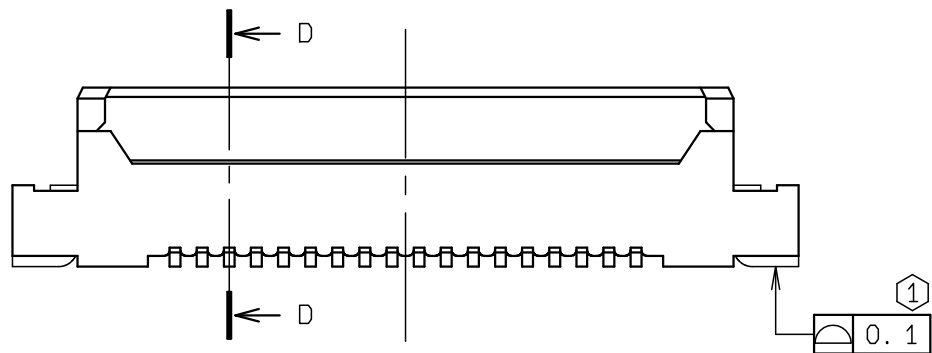



NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	LCP		COLOR :BLACK
2	CONTACT		N	PHOS-BRONZE		NI UNDERCOAT AU PLATTED
3	ANCHOR PLATE		2	BRASS		NI UNDERCOAT Sn-Cu PLATTED
4	VACUUM TAPE		1	HEAT-RESISTING TAPE		

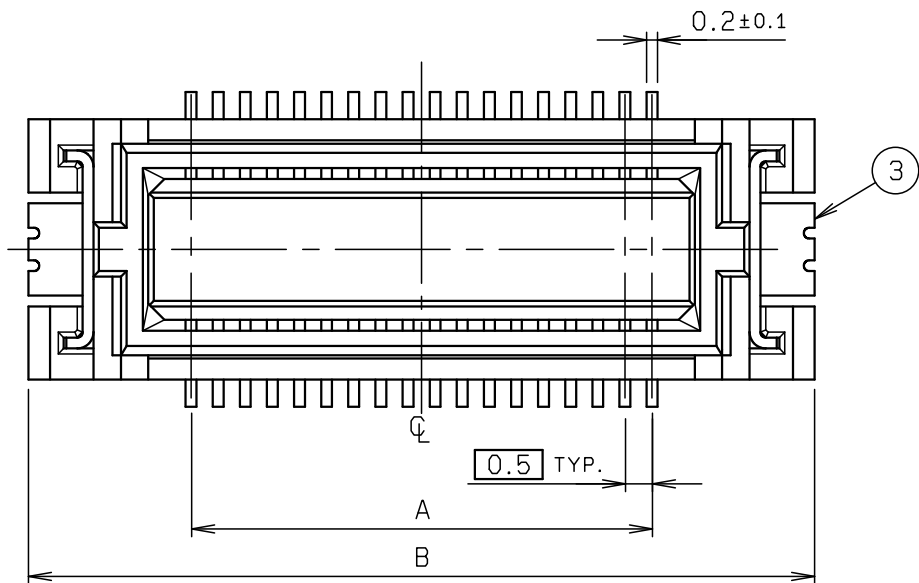

吸着テープ位置
POSITION OF VACUUM TAPE

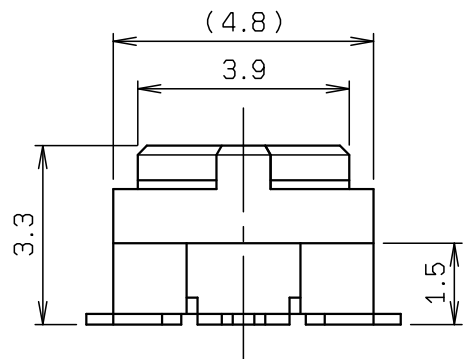

基板取り付け寸法
RECOMMENDED LAYOUT

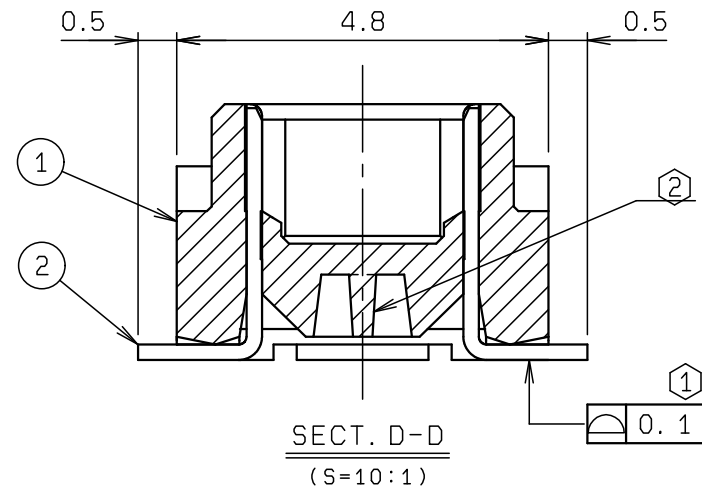

注 記
NOTE

- ① コンタクト及び固定金具の輪郭度は0.1MAX.
COPLANARITY OF CONTACT TAIL
AND ANCHOR PLATE IS 0.1 MAX.
- ② 60極以下 : リブなし
LESS THAN 60P : WITHOUT RIB
70極以上 : リブあり
MORE THAN 70P : WITH RIB

※この注記は1ページ目のみ適用
※THIS NOTES IS APPLICABLE TO
SHEET-1 ONLY.

極 数 NO. OF POS.	A	B	C
20	4.5	10.5	7.7
30	7.0	13.0	10.2
40	9.5	15.5	12.7
50	12.0	18.0	15.2
60	14.5	20.5	17.7
70	17.0	23.0	20.2
80	19.5	25.5	22.7
90	22.0	28.0	25.2
100	24.5	30.5	27.7
110	27.0	33.0	30.2
120	29.5	35.5	32.7

※この表は1ページ目のみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 ONLY.


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		B	DCN-889	2017/12/06			
X < 10 ±0.2				A	DCN-1645	2005/12/15	A. TSUNEMURA	Y. SHIROYAMA	N. HAYASHI
10 ≤ X < 30 ±0.25		UNIT mm		O	EDN-1216	2004/11/17	A. TSUNEMURA	Y. SHIROYAMA	N. HAYASHI
30 ≤ X ±0.3		ANGLE 3RD		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE 7 : 1		PART NAME / 品名					
		DATE 2004/11/17		SERIES 5046 PLUG ASSY ST SMT					
DRAWN T. KOMATSU		DESIGNED A. TSUNEMURA		BOARD TO BOARD H=4.0 WITH ANCHOR PLATE					
CHECKED Y. SHIROYAMA		APPROVED N. HAYASHI		PART NO. / 型番					
				14 5046 XXX X40 XXX +					
				DWG NO. / 図番					
				BJS 5046088					
				SHEET/REV					
				1/2 B					


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	14 5046 XXX X40 XXX +	1000	LCP		10 5046 XXX X40 XXX +
2	EMBOSSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	PET		
4	REEL		1	POLYSTYRENE		

注 記
NOTE

1. 梱包数量：1000 個/リール
PACKING QUANTITY:1000 ea/reel
2. 納入時のリール巻き方向
DIRECTION OF REEL

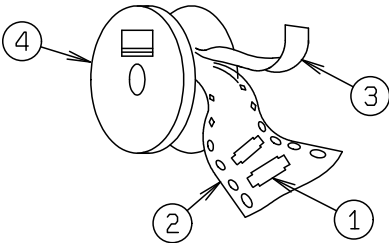



3. 引出し方向
USER DIRECTION OF FEED

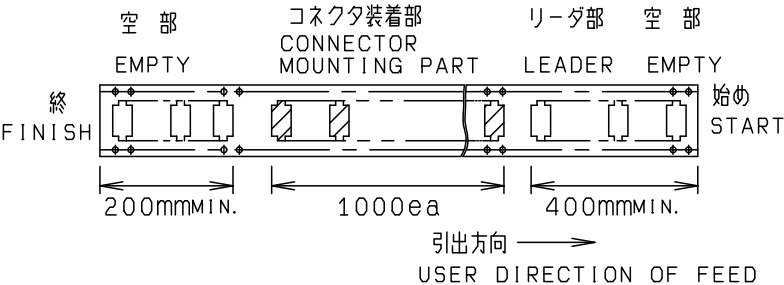


4. 型 番
P/N
- 14 5046 XXX X40 XXX +
- 極 数
NO. OF POS.
- バリエーション
VARIATION
- 1: 金具付き WITH ANCHOR PLATE
- 6: 金具付き, 吸着テープ付き
WITH ANCHOR PLATE,
WITH VACUUM TAPE
- バリエーション
VARIATION
- 40: H=4.0mm
- めっきコード
PLATING CODE
- 829: 通常仕様 STANDARD TYPE
- 868: Ni 禁制帯仕様 NI INHIBITOR

※この注記の1~3は2ページ目にも適用
※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-2 ONLY.



TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2									
10 ≤ X < 30 ±0.25									
30 ≤ X ±0.3									
ANGLE / 角度		UNIT		ANGLE		REFER TO SHEET		1/2	
±3°		mm		3RD		NO.		EDN/DCN	
		SCALE		DATE		DATE		ISSUE	
		5 : 2		2004/11/17		CHECKED		APPROVED	
DRAWN		DESIGNED		CHECKED		APPROVED		PART NAME / 品名	
T. KOMATSU		A. TSUNEMURA		Y. SHIROYAMA		N. HAYASHI		SERIES 5046 EMBOSS TAPE ASSY	
								PLUG ST SMT H=4.0 WITH ANCHOR PLATE	
								PART NO. / 型番	
								14 5046 XXX X40 XXX +	
								DWG NO. / 図番	
								BJS 5046088	
								SHEET / REV	
								2 / 2 B	

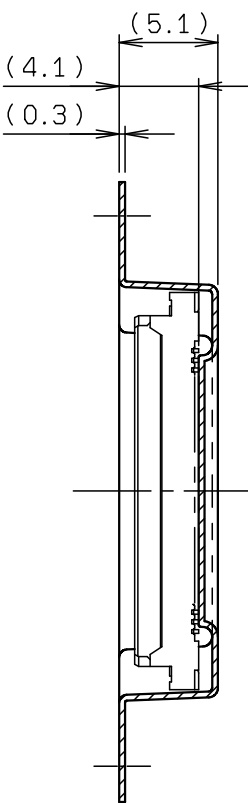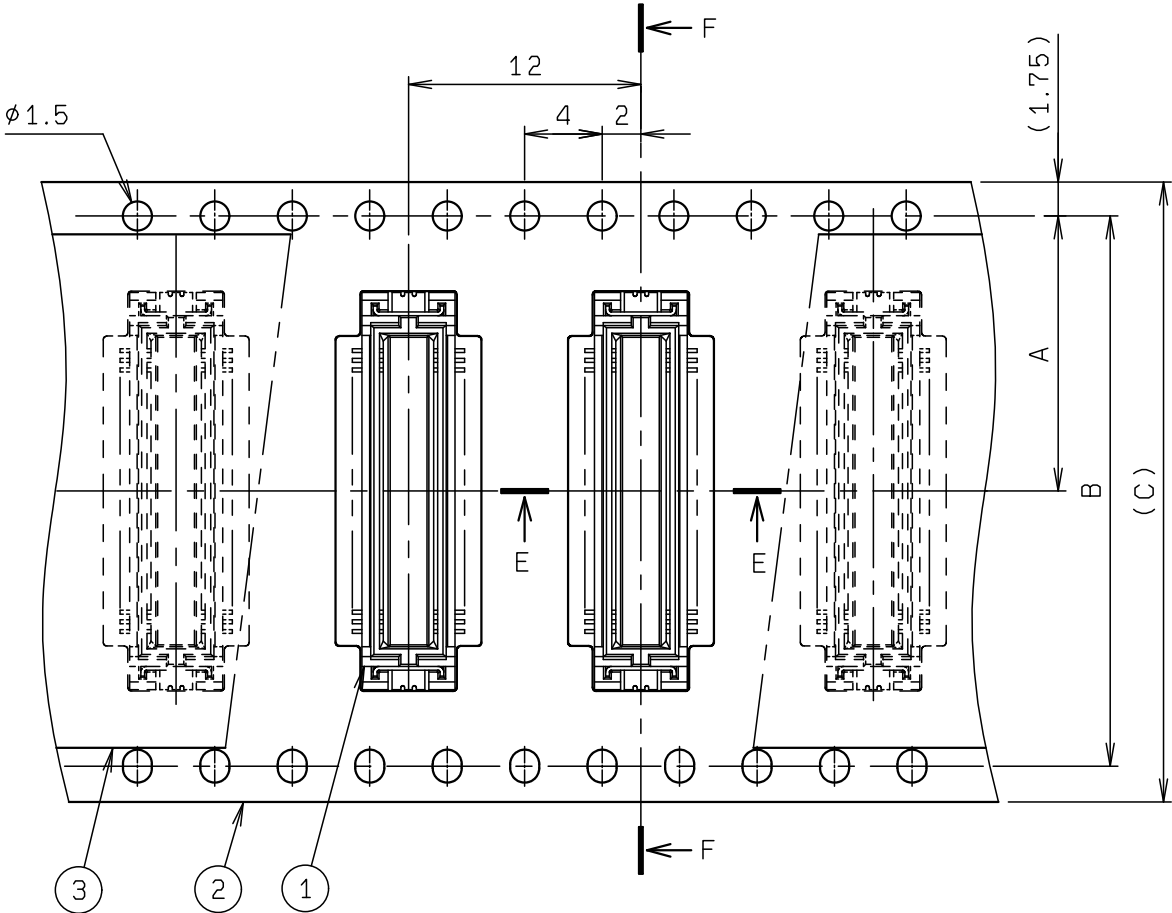

SECT. F-F

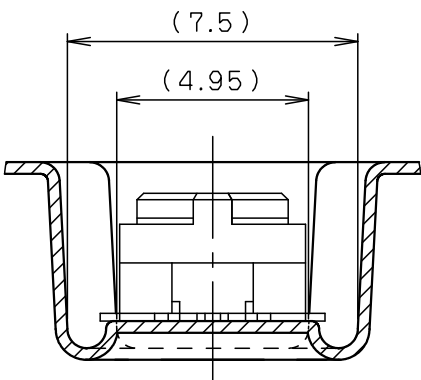

SECT. E-E
(S=5:1)

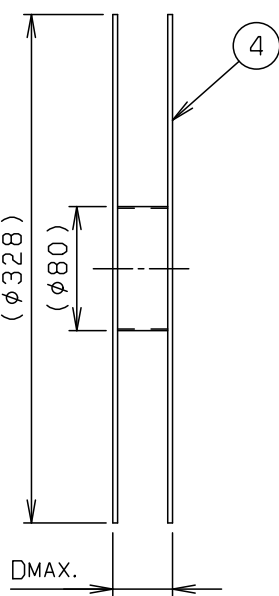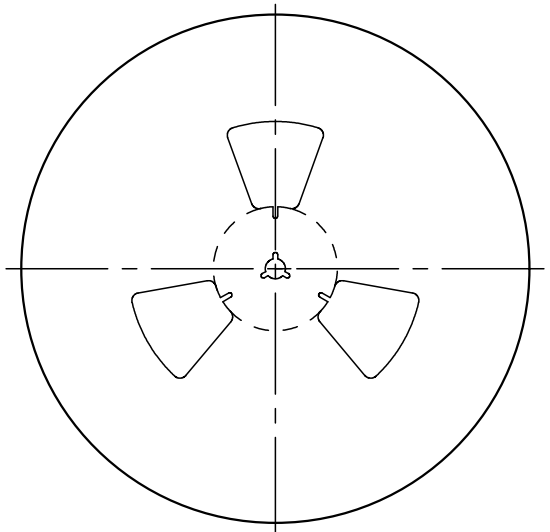

REEL DIMENSION
(S=1:5)

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS