

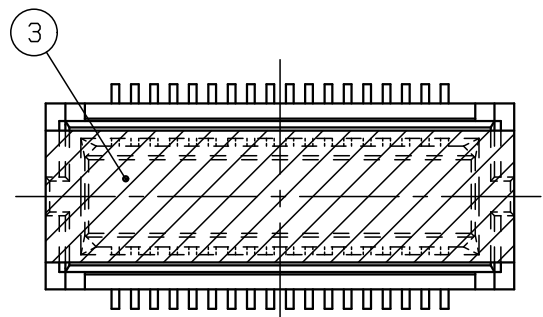
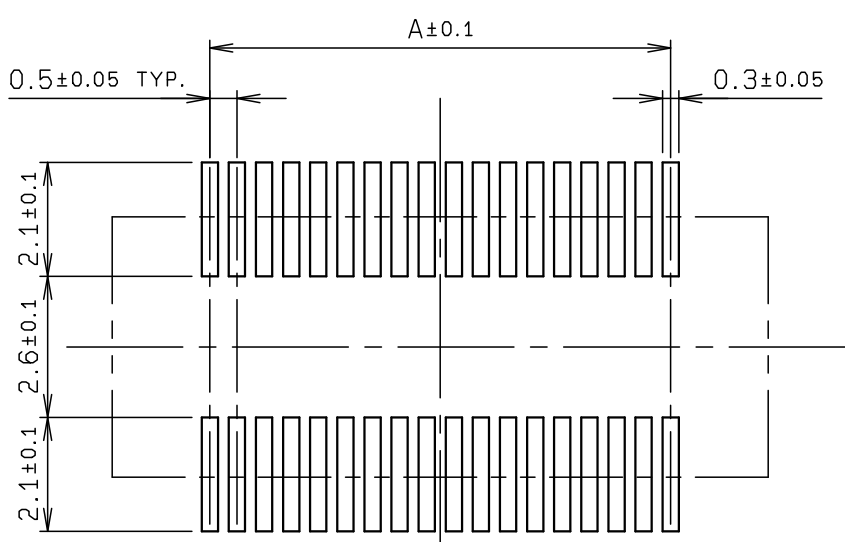
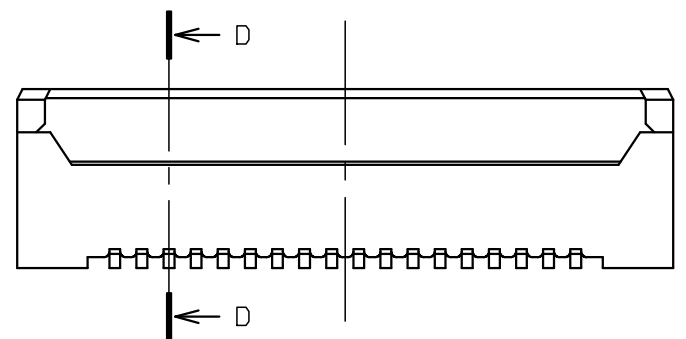


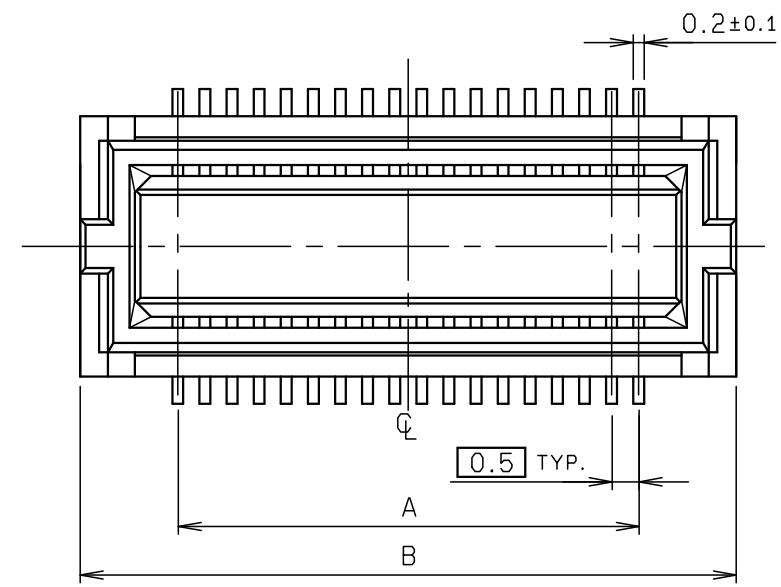


吸着テープ位置
POSITION OF VACUUM TAPE

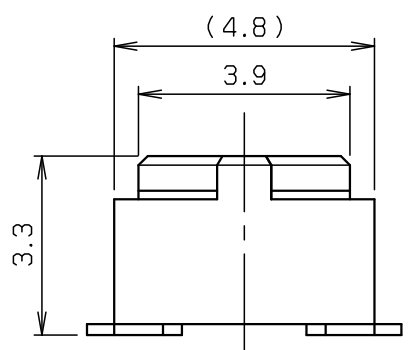

基板取り付け寸法
MOUNTING LAYOUT

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	LCP		COLOR :BLACK
2	CONTACT		N	PHOS-BRONZE		NI UNDER COAT AU PLATED
3	VACUUM TAPE		2	HEAT-RESISTING TAPE		

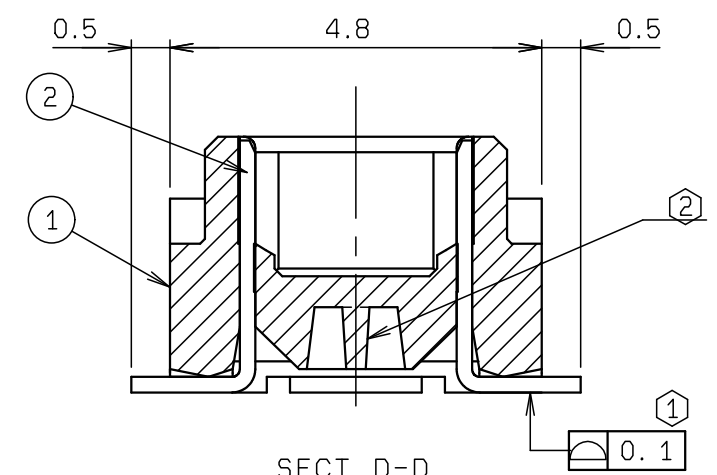

SECT. D-D
(S=10:1)

注 記
NOTE

- ① コンタクトの輪郭度は0.1MAX.
COPLANARITY OF CONTACT TAIL IS 0.1 MAX.
- ② 60極以下 : リブなし
LESS THAN 60P : WITHOUT RIB
70極以上 : リブあり
MORE THAN 70P : WITH RIB

※この注記は1ページ目のみ適用
※THIS NOTES IS APPLICABLE TO SHEET-1 ONLY.

極 数 NO. OF POS.	A	B
20	4.5	8.1
30	7.0	10.6
40	9.5	13.1
50	12.0	15.6
60	14.5	18.1
70	17.0	20.6
80	19.5	23.1
90	22.0	25.6
100	24.5	28.1
110	27.0	30.6
120	29.5	33.1

※この表は1ページ目のみ適用
※THIS CHART IS APPLICABLE TO SHEET-1 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2				A DCN-889		2017/12/06			
10 ≤ X <30 ±0.25		UNIT mm		O EDN-1216		2004/11/17		A. TSUNEMURA Y. SHIROYAMA N. HAYASHI	
30 ≤ X ±0.3		ANGLE 3RD		NO. EDN/DCN		DATE		ISSUE	
ANGLE / 角度 ±3°		SCALE 7:1		DATE 2004/11/17		PART NAME / 品名		SERIES 5046 PLUG ASSY ST SMT	
DRAWN T. KOMATSU		DESIGNED A. TSUNEMURA		CHECKED Y. SHIROYAMA		APPROVED N. HAYASHI		PART NO. / 型番	
								14 5046 XXX X40 829 +	
								DWG NO. / 図番	
								BJS 5046089	
								SHEET REV	
								1/2 A	



KYOCERA Corporation


DWG NO. / 図番
BJS 5046089

SHEET REV
1/2 A


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	14 5046 XXX X40 829 +	1000	LCP		10 5046 XXX X40 829 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	PET		
4	REEL		1	POLYSTYRENE		

注 記
NOTE

1. 梱包数量：1000 個/リール
PACKING QUANTITY:1000 ea/reel
2. 納入時のリール巻き方向
DIRECTION OF REEL

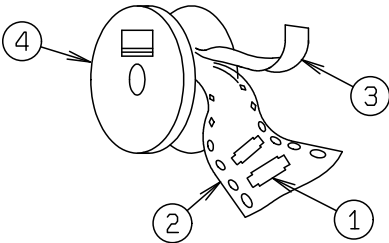

3. 引出し方向
USER DIRECTION OF FEED

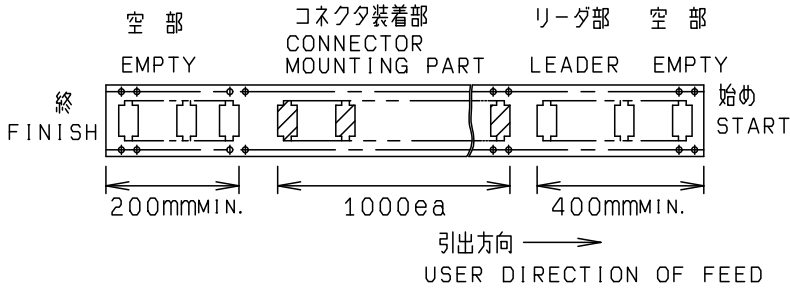


4. 型 番
P/N 14 5046 XXX X40 829 +
- 極 数
NO. OF POS. 14
- バリエーション
VARIATION XXX
- 0：フランジ無し
WITHOUT FLANGE
- 5：フランジ無し，吸着テープ付き
WITHOUT FLANGE
WITH KAPTON TAPE
- バリエーション
VARIATION X40
- 40：H=4.0mm

※この注記の1～3は2ページ目にも適用
※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-2 ONLY.



極 数 NO. OF POS.	A	B	C	D
20	14.2	28.4	32.0	38.4
30	14.2	28.4	32.0	38.4
40	14.2	28.4	32.0	38.4
50	14.2	28.4	32.0	38.4
60	14.2	28.4	32.0	38.4
70	20.2	40.4	44.0	50.4
80	20.2	40.4	44.0	50.4
90	20.2	40.4	44.0	50.4
100	20.2	40.4	44.0	50.4
110	26.2	52.4	56.0	62.4
120	26.2	52.4	56.0	62.4

※この表は2ページ目にも適用
※THIS CHART IS APPLICABLE TO SHEET-2 ONLY.

SECT. F-F

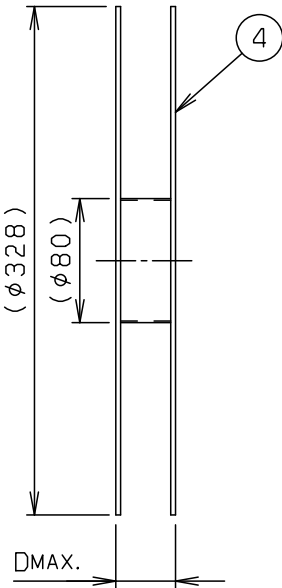

REEL DIMENSION
(S=1:5)

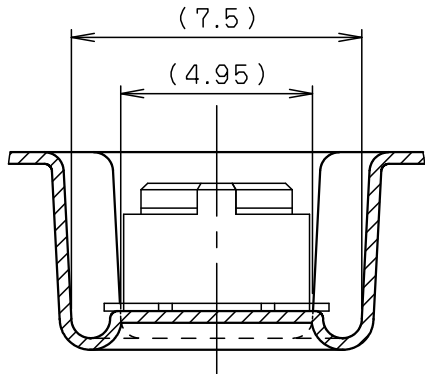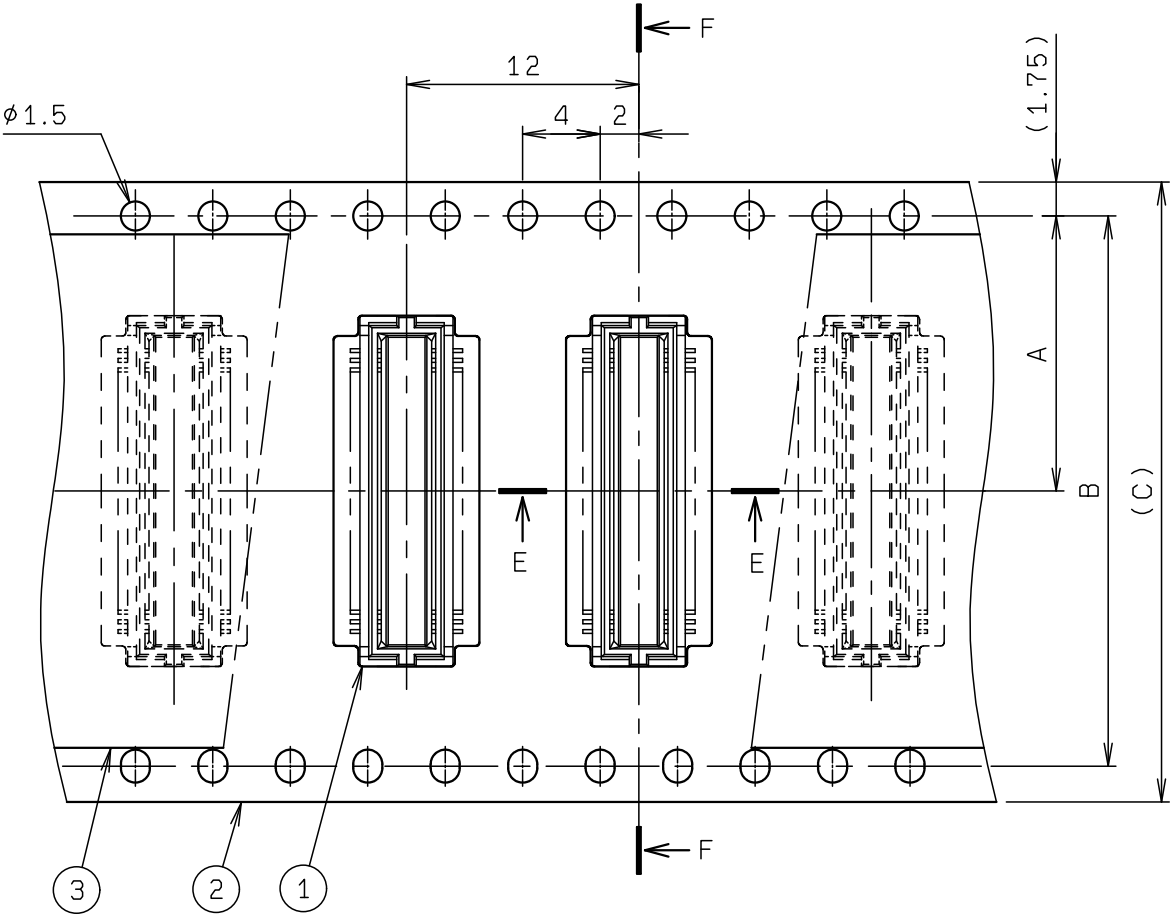

SECT. E-E
(S=5:1)

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2				REFER TO SHEET		1/2			
10≤ X <30 ±0.25		UNIT	ANGLE	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
30≤ X ±0.3		mm	3RD	PART NAME / 品名					
		SCALE	DATE	SERIES 5046 EMOSS TAPE ASSY					
ANGLE / 角度		5 : 2	2004/11/17	PLUG ST SMT H=4.0 WITHOUT ANCHOR PLATE					
±3°				PART NO. / 型番					
DRAWN	DESIGNED	CHECKED	APPROVED	14 5046 XXX X40 829 +					
T. KOMATSU	A. TSUNEMURA	Y. SHIROYAMA	N. HAYASHI						
DWG NO. / 図番				SHEET/REV					
BJS 5046089				12/2 A					