

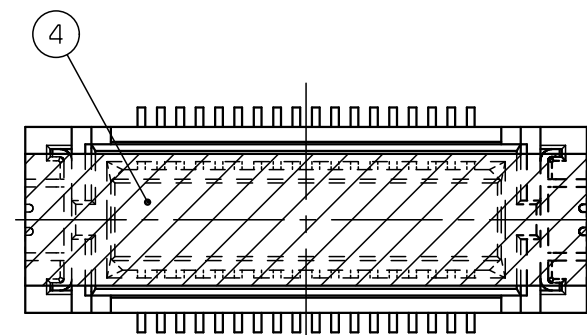
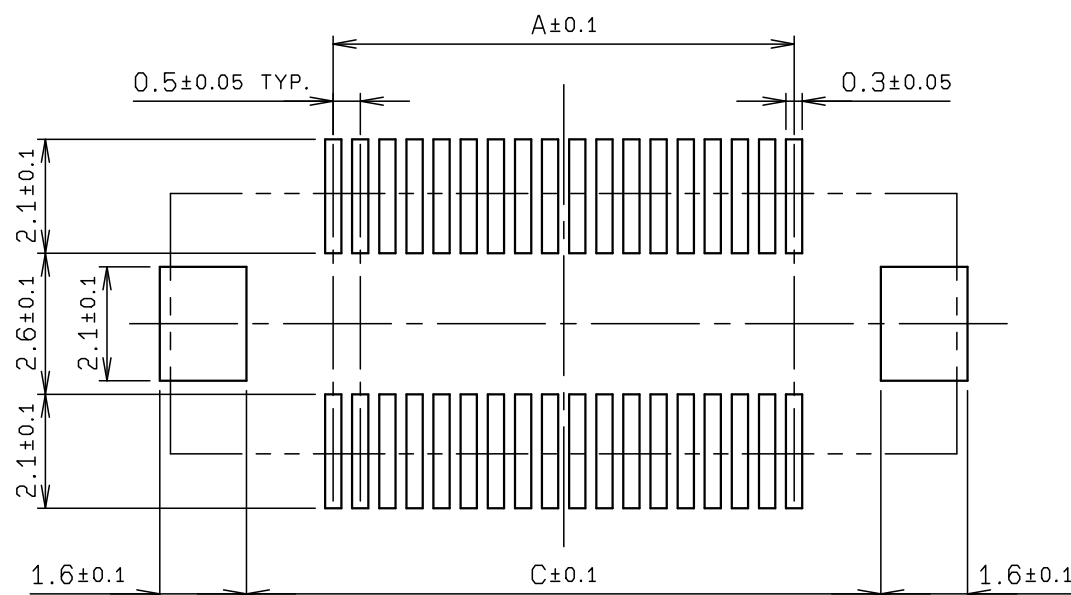
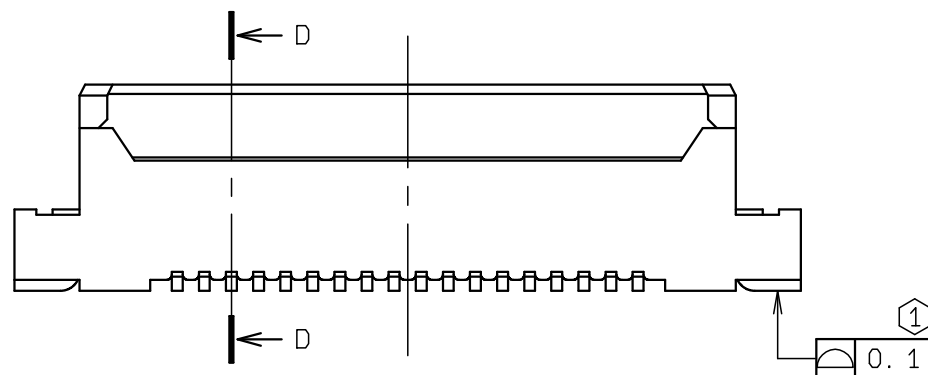


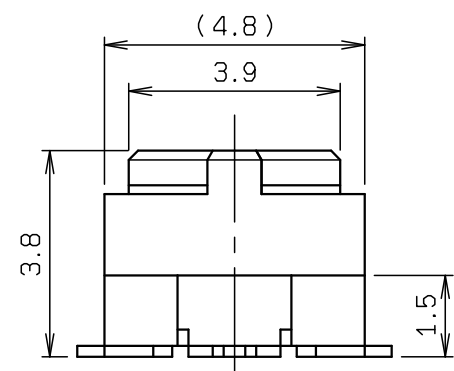


吸着テープ位置
POSITION OF VACUUM TAPE

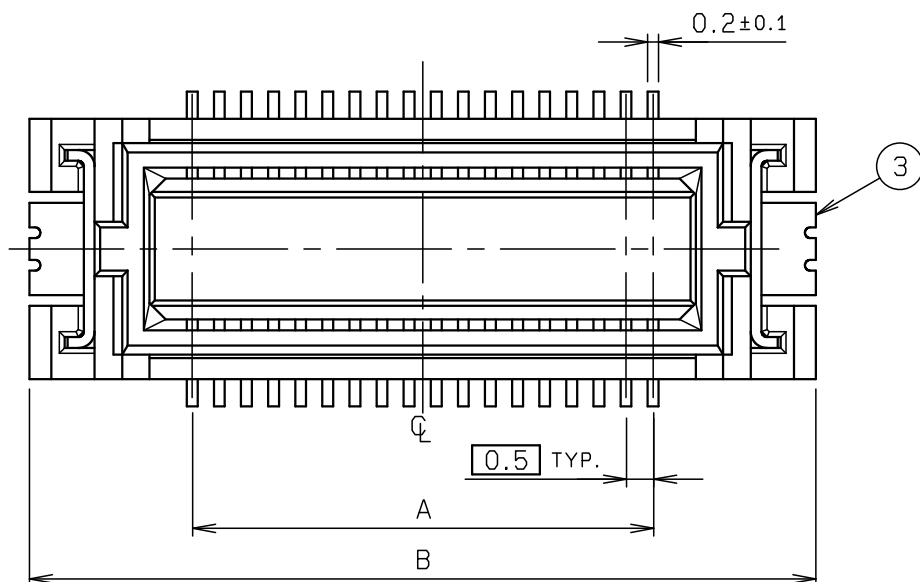

基板取付け寸法
RECOMMENDED LAYOUT

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	LCP		COLOR :BLACK
2	CONTACT		N	PHOS-BRONZE		NI UNDERCOAT AU PLATED
3	ANCHOR PLATE		2	BRASS		NI UNDERCOAT Sn-Cu PLATED
4	VACUUM TAPE		1	HEAT-RESISTING TAPE		

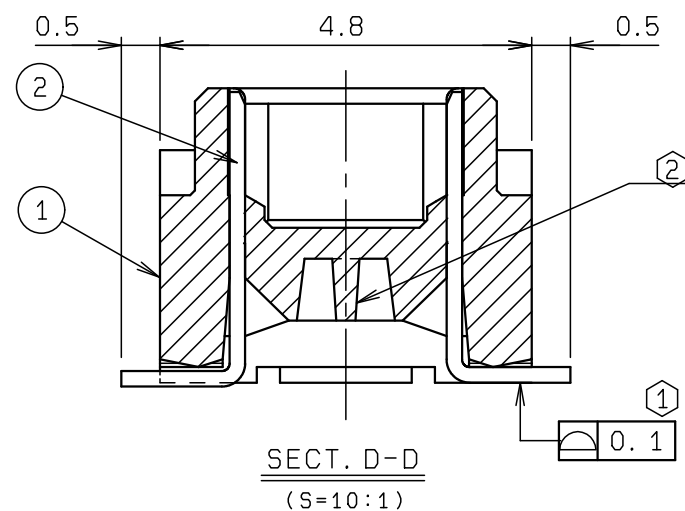

注 記
NOTE

- ① コンタクト及び固定金具の輪郭度は0.1MAX.
COPLANARITY OF CONTACT TAIL
AND ANCHOR PLATE IS 0.1 MAX.
- ② 60極以下 : リブなし
LESS THAN 60P : WITHOUT RIB
70極以上 : リブあり
MORE THAN 70P : WITH RIB



※この注記は1ページ目のみ適用
※THIS NOTES IS APPLICABLE TO
SHEET-1 ONLY.

極 数 NO. OF POS.	A	B	C
20	4.5	10.5	7.7
30	7.0	13.0	10.2
40	9.5	15.5	12.7
50	12.0	18.0	15.2
60	14.5	20.5	17.7
70	17.0	23.0	20.2
80	19.5	25.5	22.7
90	22.0	28.0	25.2
100	24.5	30.5	27.7
110	27.0	33.0	30.2
120	29.5	35.5	32.7


※この表は1ページ目のみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 ONLY.

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		C	DCN18719	2018/08/18			
X < 10 ±0.2				B	DCN-889	2017/12/06	H. SAWAKI	H. WATANABE	A. TSUNEMURA
10 ≤ X < 30 ±0.25		UNIT mm		O	EDN-1292	2004/12/06	A. TSUNEMURA	Y. SHIROYAMA	N. HAYASHI
30 ≤ X ±0.3		ANGLE 3RD		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE 7 : 1		PART NAME / 品名					
		DATE 2004/12/06		SERIES 5046 PLUG ASSY ST SMT					
DRAWN T. KOMATSU		DESIGNED A. TSUNEMURA		BOARD TO BOARD H=4.5 (WITH FLANGE)					
CHECKED Y. SHIROYAMA		APPROVED N. HAYASHI		PART NO. / 型番					
				14 5046 XXX X45 868 +					
				DWG NO. / 図番					
				BJS 5046093					
				SHEET / REV					
				1 / 2 C					


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

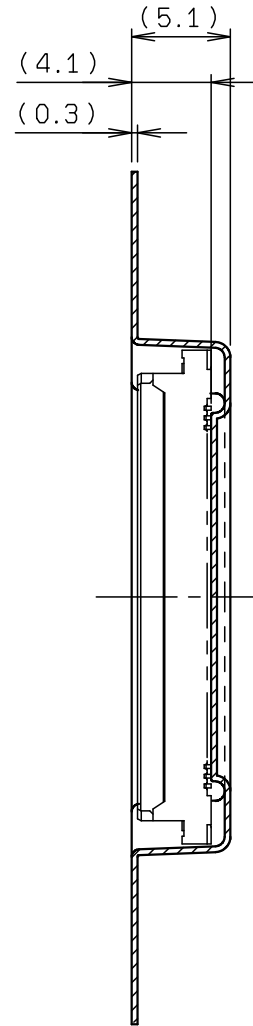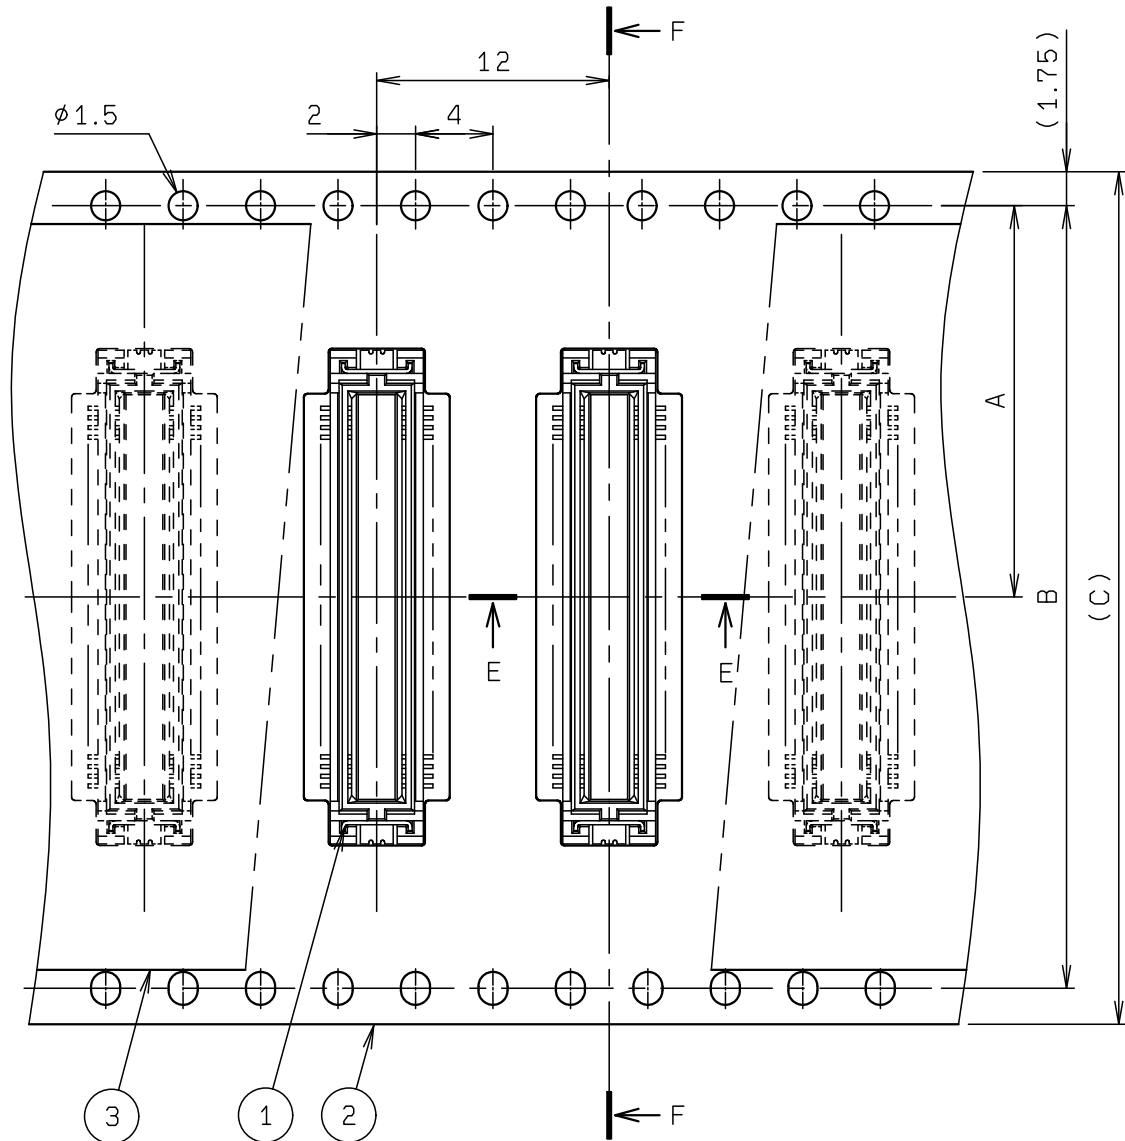


SECT. F-F

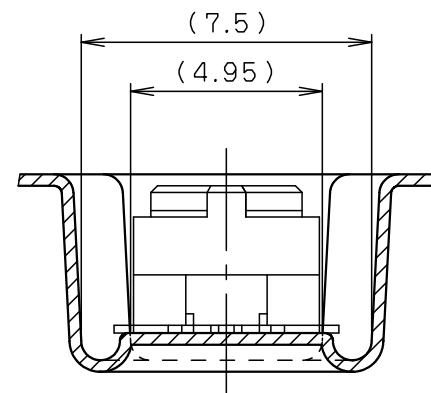

SECT. E-E
(S=5:1)

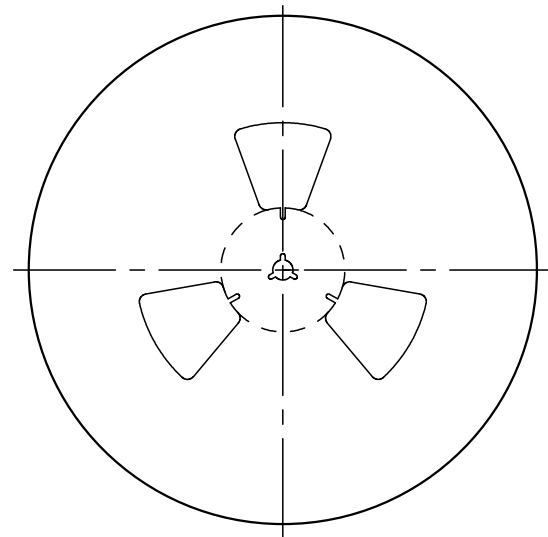


REEL DIMENSION
(S=1:5)

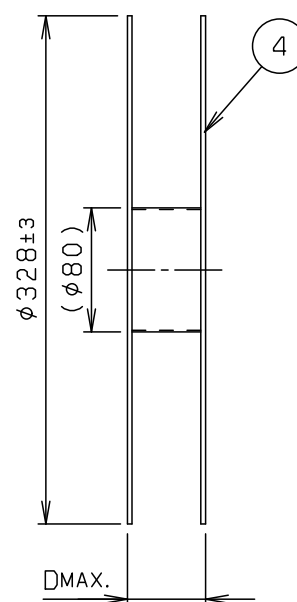


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	14 5046 XXX X45 868 +	1000	LCP		10 5046 XXX X45 868 +
2	EMBOSSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	PET		
4	REEL		1	POLYSTYRENE		

注 記
NOTE

- 梱包数量：1000 個/リール
PACKING QUANTITY:1000 ea/reel
- 納入時のリール巻き方向
DIRECTION OF REEL

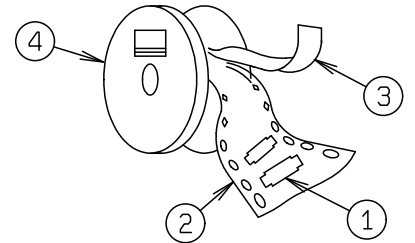

- 引出し方向
USER DIRECTION OF FEED

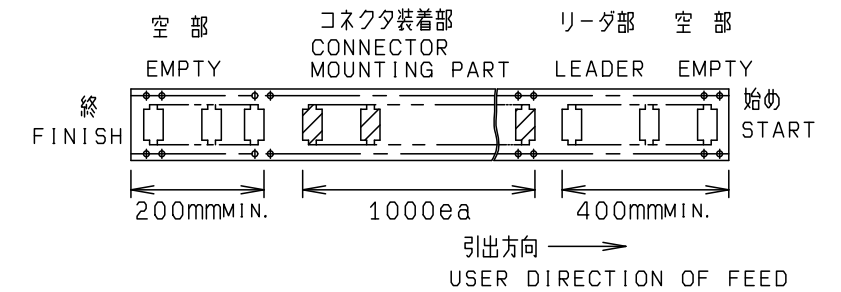

- 型番
P/N
14 5046 XXX X45 868 +
極数
NO. OF POS.
バリエーション
VARIATION
1:金具付き WITH ANCHOR PLATE
6:金具付き 吸着テープ付き
WITH ANCHOR PLATE,
WITH VACUUM TAPE
バリエーション
VARIATION
45:H=4.5TYPE
めっきコード
PLATING CODE
868:Ni禁制帯仕様 Ni INHIBITOR
めっき PLATING
+ :Sn-Cu

※この注記の1～3は2ページ目にも適用
※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-2 ONLY.

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2 10 ≤ X <30 ±0.25 30 ≤ X ±0.3		UNIT mm		ANGLE 3RD		REFER TO SHEET 1/2			
ANGLE / 角度 ±3°		SCALE 5 : 2		DATE 2004/12/06		NO.	EDN/DCN	DATE	ISSUE
DRAWN T. KOMATSU		DESIGNED A. TSUNEMURA		CHECKED Y. SHIROYAMA		APPROVED N. HAYASHI		PART NAME / 品名 SERIES 5046 EMBOSS TAPE ASSY PLUG ASSY ST SMT WITH ANCHOR PLATE H=4.5	
						PART NO. / 型番 14 5046 XXX X45 868 +		DWG NO. / 図番 BJS 5046093	
								SHEET/REV 12/2 C	

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS



KYOCERA Corporation