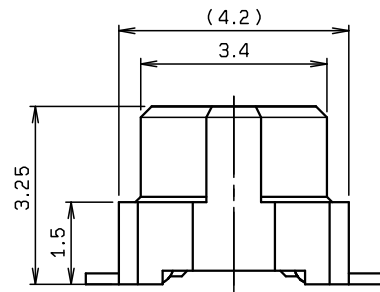
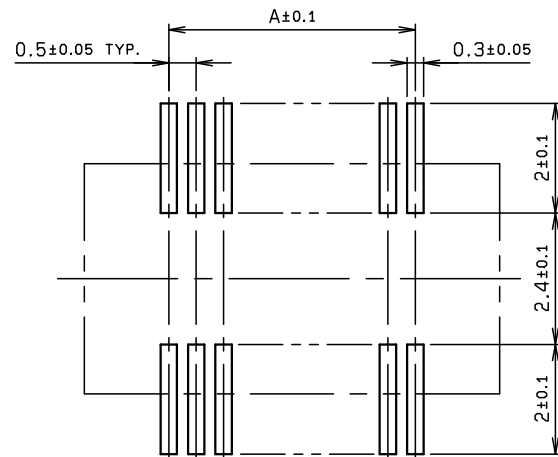
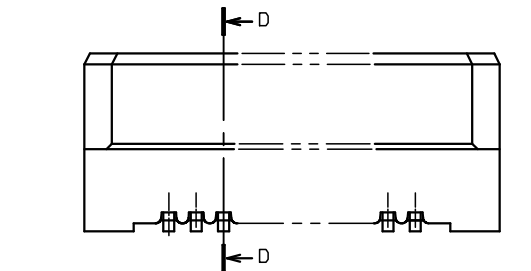
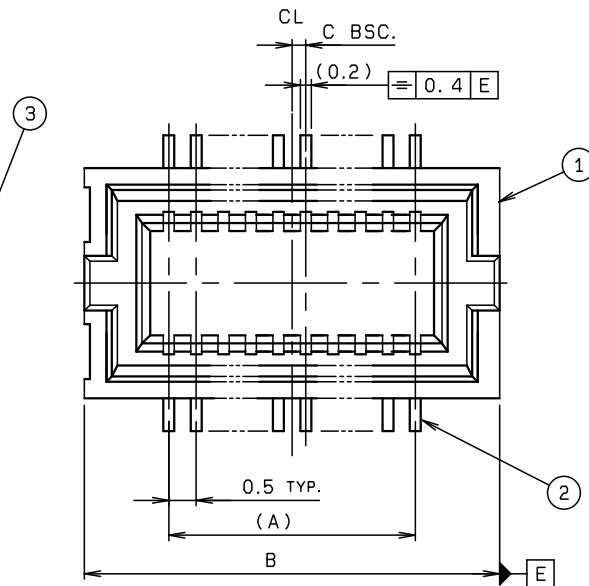
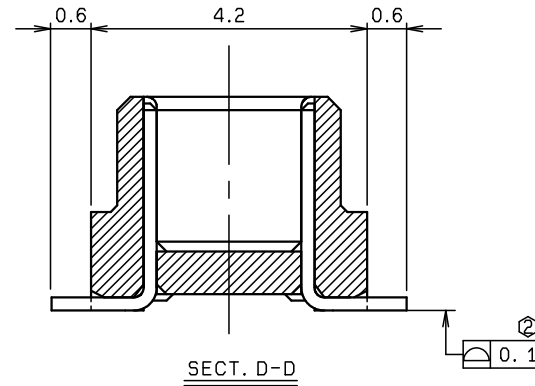


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS吸着テープ貼り付け位置
POSITION OF VACUUM TAPE基板取付け寸法
MOUNTING LAYOUT

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	GLASS FILLED HEAT-RESISTING RESIN		UL94V-0
2	CONTACT		N	PHOS-BRONZE		NI UNDER COAT CONTACT AREA: AU TAIL: Sn-Cu
3	VACUUM TAPE		1			

注 記
NOTE

- ① テール底面の相互の輪郭度は0.1mmMAX.
COPLANARITY OF CONTACT TAILS IS 0.1mmMAX.


※この注記1は1ページ目のみ適用
※THIS NOTES 1 ARE APPLICABLE TO SHEET-1 ONLY.

極 数 NO. OF POS.	A	B	C
20	4.5	7.5	0.25
30	7.0	10.0	0.5
40	9.5	12.5	0.25
50	12.0	15.0	0.5
60	14.5	17.5	0.25
70	17.0	20.0	0.5
80	19.5	22.5	0.25
90	22.0	25.0	0.5
100	24.5	27.5	0.25
110	27.0	30.0	0.5
120	29.5	32.5	0.25


※この表は1ページ目のみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 ONLY.

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		D	DCN20663	2020/07/01	H. WATANABE		A. TSUNEMURA
X < 10 ±0.2				C	DCN19626	2019/07/11	H. SAWAKI	H. WATANABE	A. TSUNEMURA
10 ≤ X < 30 ±0.25				O	EDN-1126	2004/10/15	A. TSUNEMURA	Y. SHIROYAMA	N. HAYASHI
30 ≤ X ±0.3				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE NTS		PART NAME / 品名					
		DATE 2004/10/15		SERIES 5047 PLUG ASSY					
DRAWN T. KOMATSU		DESIGNED A. TSUNEMURA		0.5mm PITCH BOARD TO BOARD					
CHECKED Y. SHIROYAMA		APPROVED N. HAYASHI		PART NO. / 製番					
				14 5047 XXX X50 829 +					
				DWG NO. / 図番					
				BJS 5047067					
				SHEET/REV					
				1/2 D					


KYOCERA

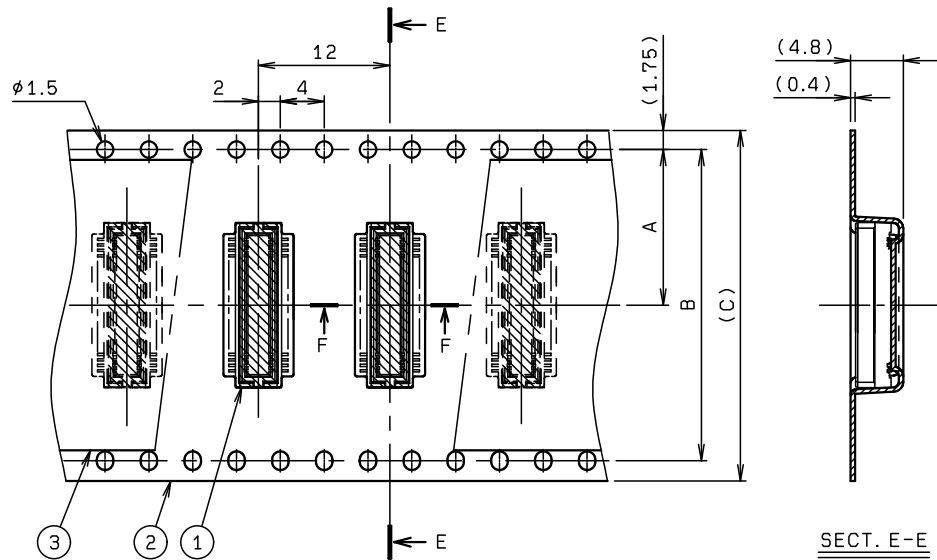


SECT. E-E

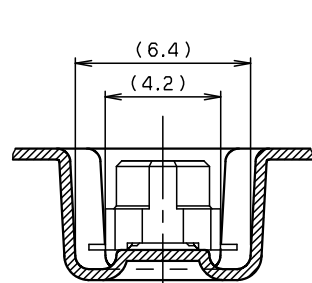

SECT. F-F (S=5:1)

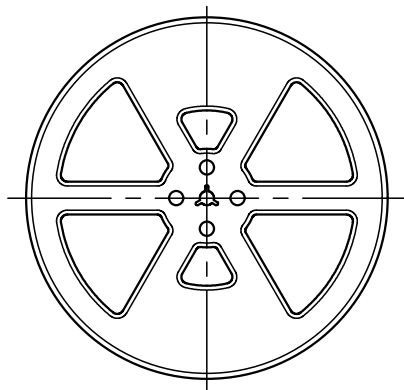


REEL DIMENSION (S=5:1)

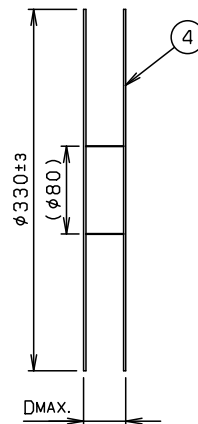

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	14 5047 XXX X50 829 +	800	LCP		10 5047 XXX X50 829 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	PET		
4	REEL		1	POLYSTYRENE		


注 記 NOTE

1. 梱包数量 : 800 個/リール
PACKING QUANTITY : 800 ea/reel
2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY



3. 引出し方向

USER DIRECTION OF FEED

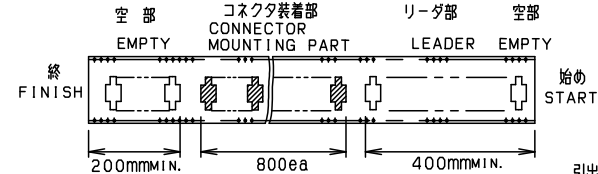4. 型番
P/N

14 5047 XXX X50 829 +

種数
NO OF POS.バリエーション
VARIATION

- 4: 吸着テープ無し
WITHOUT VACUUM TAPE
- 9: 吸着テープ付き
WITH VACUUM TAPE

50 : H=5.0 TYPE

めっきコード

PLATING CODE

829: CONTACT AREA Au0.1μm MIN. TAIL AREA Au FLASH

※この注記の1~3は2ページ目にのみ適用

※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-2 ONLY.

種数 NO. OF POS.	A	B	C	D
20	14.2	28.4	32.0	38.4
30	14.2	28.4	32.0	38.4
40	14.2	28.4	32.0	38.4
50	14.2	28.4	32.0	38.4
60	14.2	28.4	32.0	38.4
70	20.2	40.4	44.0	50.4
80	20.2	40.4	44.0	50.4
90	20.2	40.4	44.0	50.4
100	20.2	40.4	44.0	50.4
110	20.2	40.4	44.0	50.4
120	20.2	40.4	44.0	50.4

※この表は2ページ目にのみ適用

※THIS CHART IS APPLICABLE TO SHEET-2 ONLY.

引出し方向

USER DIRECTION OF FEED

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2									
10 ≤ X < 30 ±0.25									
30 ≤ X ±0.3									
ANGLE / 角度		SCALE		DATE					
±3°		2 : 1		2004/10/15					
DRAWN		DESIGNED		CHECKED		APPROVED		PART NO. / 型番	
T. KOMATSU		A. TSUNEMURA		Y. SHIROYAMA		N. HAYASHI		14 5047 XXX X50 829 +	
								DWG NO. / 図番	
								BJS 5047067	
								SHEET/REV	
								2/2 D	

KYOCERA

SHEET/REV

2/2 D