

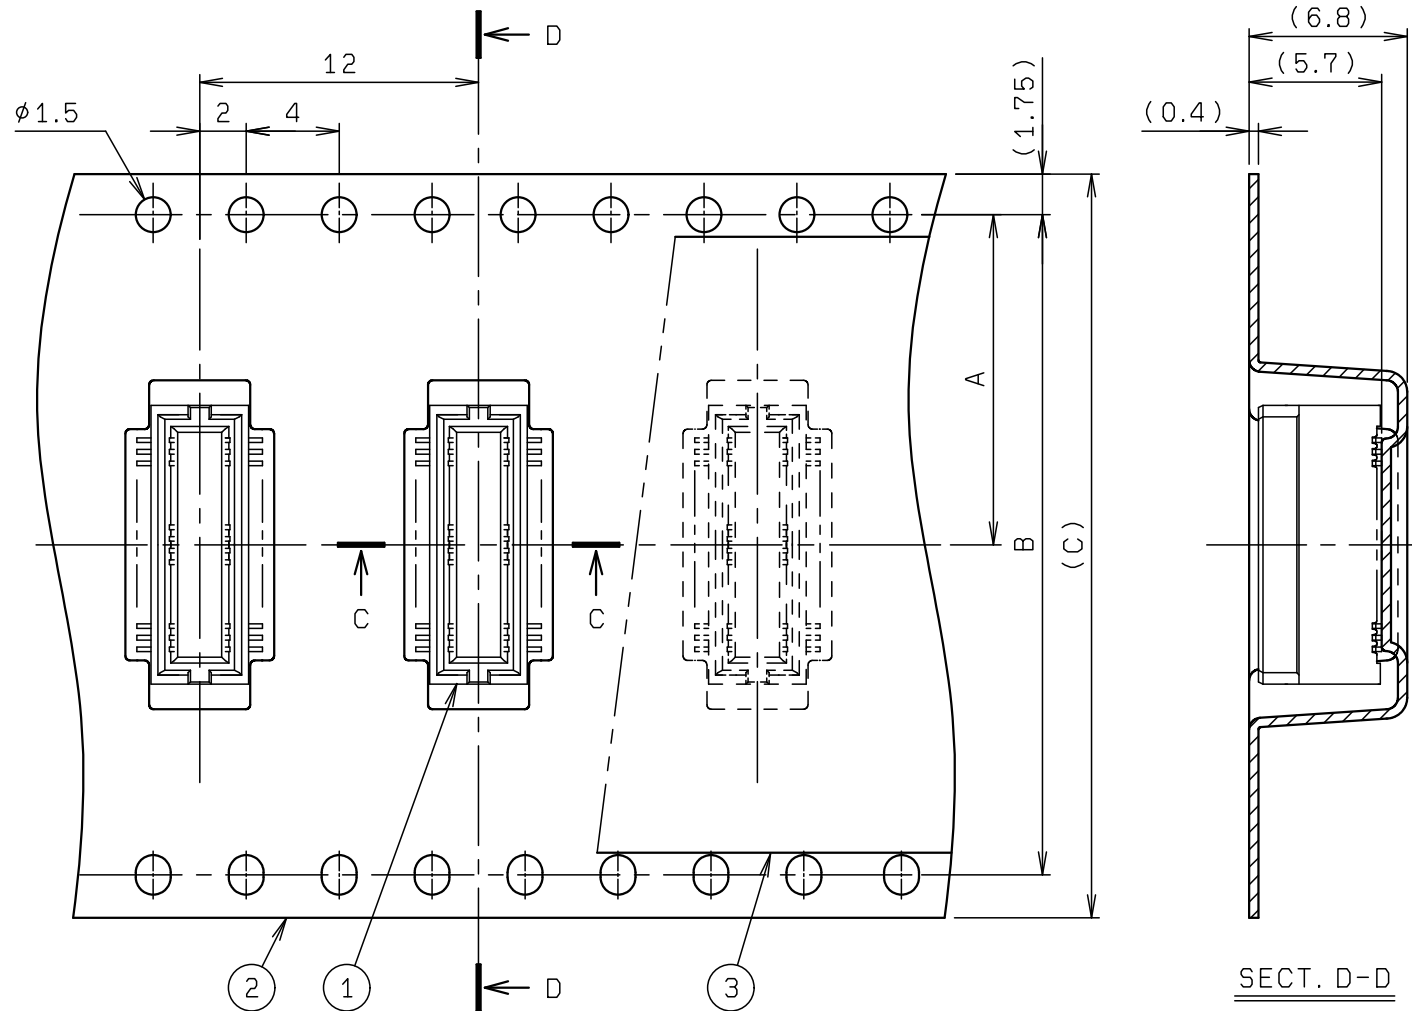
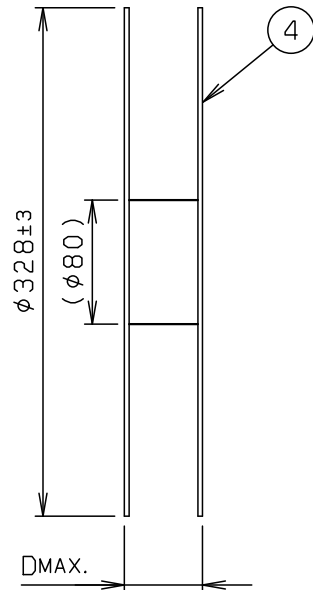


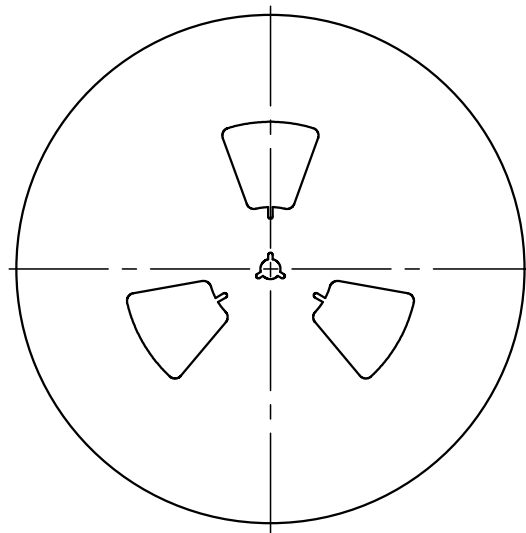

SECT. D-D

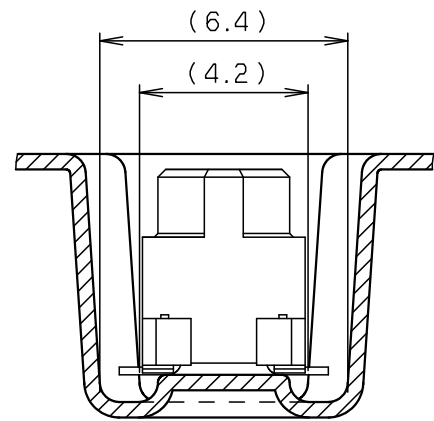

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	14 5047 XXX X70 829 +	800			10 5047 XXX X70 XXX +
2	EMBOSSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	PET		
4	REEL		1	POLYSTYRENE		


極 数 NO. OF POS.	A	B	C	D
20	14.2	28.4	32.0	38.4
30	14.2	28.4	32.0	38.4
40	14.2	28.4	32.0	38.4
50	14.2	28.4	32.0	38.4
60	14.2	28.4	32.0	38.4
70	20.2	40.4	44.0	50.4
80	20.2	40.4	44.0	50.4
90	20.2	40.4	44.0	50.4
100	20.2	40.4	44.0	50.4
110	20.2	40.4	44.0	50.4
120	20.2	40.4	44.0	50.4

※この表は2ページ目にのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-2 ONLY.


注 記
NOTE

1. 梱包数量：800 個/リール
PACKING QUANTITY:800 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

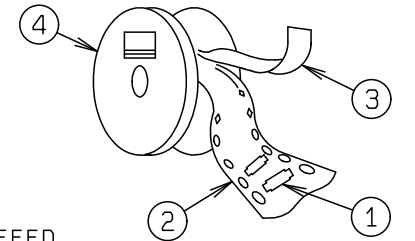

3. 引出し方向
USER DIRECTION OF FEED

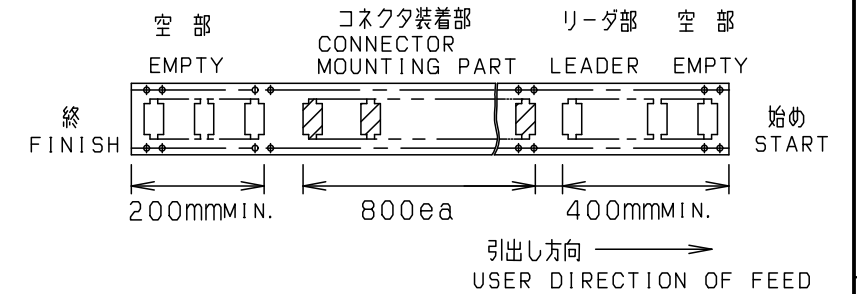

4. 型 番 14 5047 XXX X70 829 +
P/N

極 数
NO. OF POS.

バリエーション
VARIATION

4: 吸着テープ無し、金具無し
WITHOUT VACUUM TAPE
WITHOUT ANCHOR PLATE

9: 吸着テープ付き、金具無し
WITH VACUUM TAPE
WITHOUT ANCHOR PLATE

70: 7.0mm TYPE

めっきコード

PLATING CODE

829: CONTACT AREA Au 0.1 μ mMIN.
TAIL AREA Au FLASH

※この注記の1～3は2ページ目にのみ適用

※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-2 ONLY.

TOLERANCE / 一般公差 (S)			PRODUCT SPEC / 製品規格								
X < 10 ± 0.2						REFER TO SHEET 1/2					
10 $\leq$ X < 30 ± 0.25			UNIT mm			ANGLE 3RD					
30 $\leq$ X ± 0.3			SCALE 3 : 1			DATE 2005/04/26					
ANGLE / 角度 $\pm 3^\circ$			DRAWN LI			DESIGNED A. TSUNEMURA					
			CHECKED Y. SHIROYAMA			APPROVED N. HAYASHI					
			PART NO. / 型番			14 5047 XXX X70 829 +					
			DWG NO. / 図番			BJS 5047073					
						SHEET REV 2/2 D					

KYOCERA