


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
-----	-------------	----------	-----	----------	---------	---------

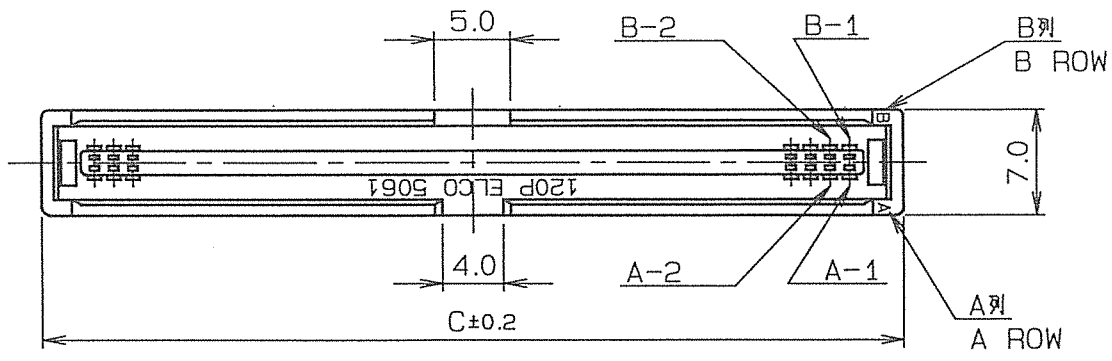

極数 NO. OF CONTACT	A	B	C
20	11.43	14.43	18.43
30	17.78	20.78	24.78
40	24.13	27.13	31.13
50	30.48	33.48	37.48
60	36.83	39.83	43.83
68	41.91	44.91	48.91
80	49.53	52.53	56.53
100	62.23	65.23	69.23
120	74.93	77.93	81.93


材質
MATERIAL

① インシュレーター : ガラス入り66ナイロン
色: グレー (UL94V-0)
INSULATOR: GLASS FILLED 66 NYLON
COLOR: GLAY (UL94V-0)




② コンタクト : リン青銅, 板厚 $t=0.25\text{mm}$
CONTACT: PHOSPHOR BRONZE
THICKNESS $t=0.25\text{mm}$

表面処理
FINISH

めっきコード PLATING CODE	接触部 CONTACT AREA	テール部 TAIL	下地めっき UNDER COAT
856	Au 0.1 μm MIN	Sn-Cu	Ni
861	Au 0.25 μm MIN		
871	Au 0.5 μm MIN		
863	Au 0.76 μm MIN		

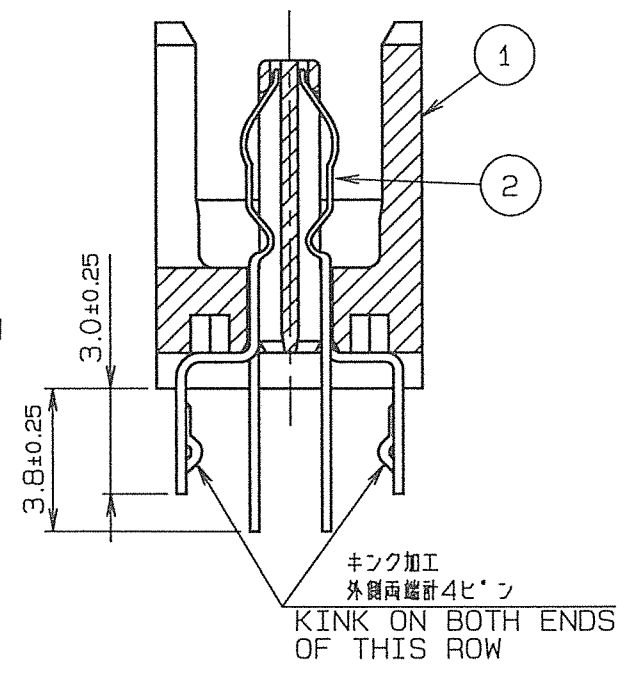

SECT. X-X (S=5/1)

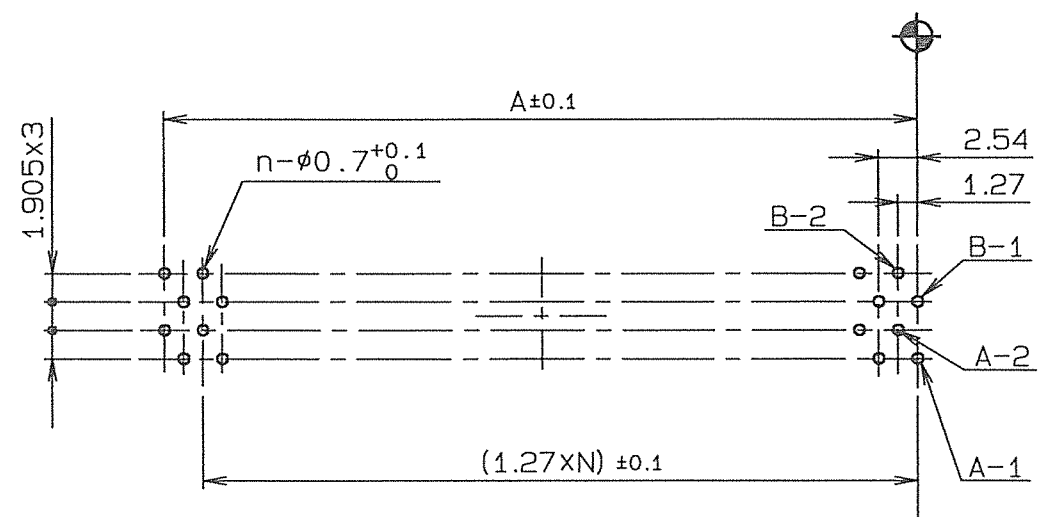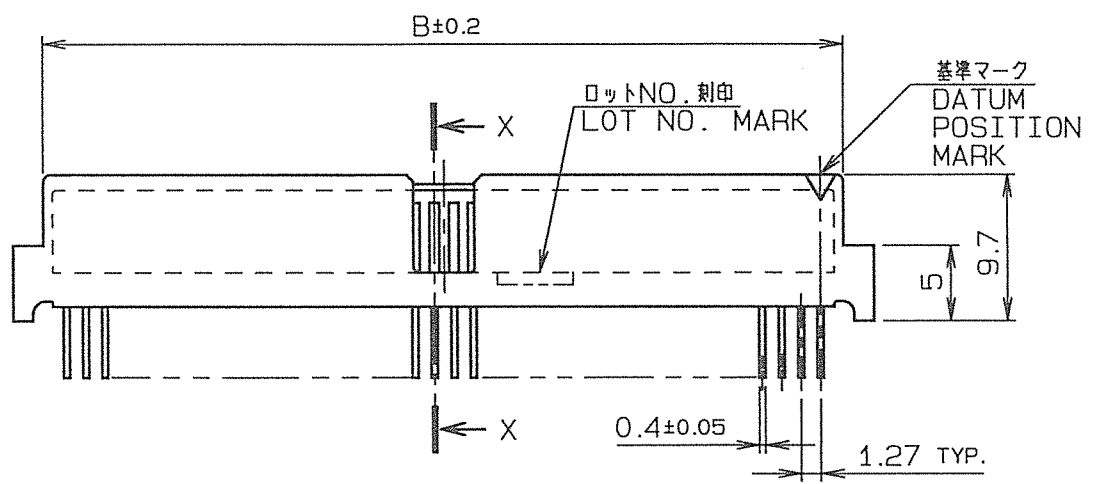

基板穴明け寸法 (コネクタ搭載側より見た図)
RECOMMENDED P.C. BOARD LAYOUT
(VIEWED FROM CONNECTOR MOUNTING SIDE)

適用基板厚
BOARD THICKNESS
 $t: 1.6\text{mm}$

<注記>
<NOTES>
1. 図示の位置にロットNO. を刻印する. (6桁)
LOT NO. SHALL BE MARKED AT THE SPECIFIED POSITION.
X X X X X X
年表示 YEAR
月表示1~9, 0, N, D MONTH
製造コード LINE NO.
日付表示01~31 DATE

<型番構成>
<PARTS NO.>
10 5061 XXX 000 XXX +
プラグ PLUG
極数 NO. OF CONTACT
バリエーション VARIATION
めっきコード PLATING CODE
めっき PLATING
+: Sn-Cu

技術部
19.7.09
発行

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X <10 10 ≤ X <30 30 ≤ X	±0.2 ±0.25 ±0.3	UNIT mm	ANGLE 3RD	A	DCN19535	2019/06/25	<i>E. Hironaka</i>	<i>Y. Shiroyama</i>	<i>N. Hayashi</i>
	0			EDN-472	2004/05/07	M. YOSHIDA	Y. SHIROYAMA	N. HAYASHI	
	NO.			EDN/DCN	DATE	ISSUE	CHECKED	APPROVED	
ANGLE / 角度 ±3°		SCALE 2 : 1	DATE 2004/05/07	PART NAME / 品名 SERIES 5061 PLUG ASSY ST DIP CONNECTOR					
DRAWN T. KOMATSU	DESIGNED M. YOSHIDA	CHECKED Y. SHIROYAMA	APPROVED N. HAYASHI	PART NO. / 型番 10 5061 XXX 000 XXX +					
KYOCERA				DWG NO. / 図番 BJS 5061242				SHEET REV 1 / 1 A	

RoHS規制対応
COMPLIANT WITH
RoHS REGULATIONS