
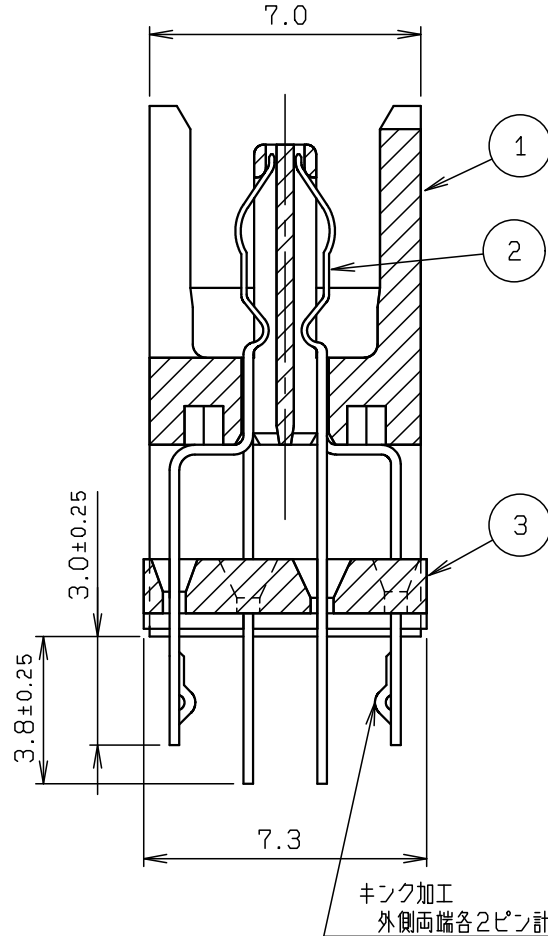
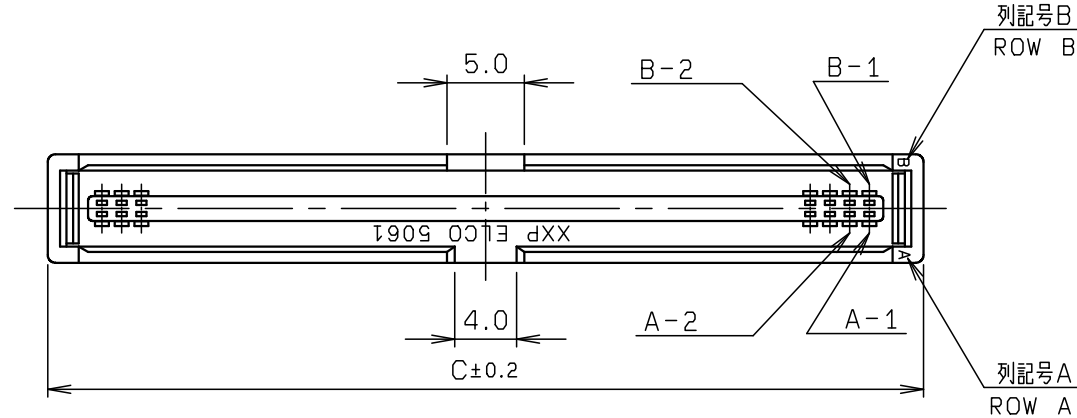
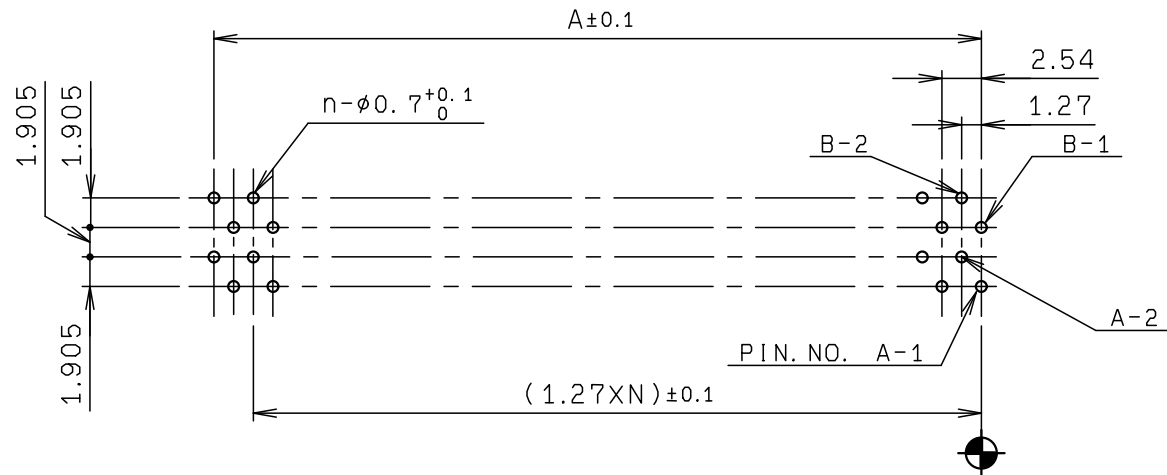


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

基板穴明け寸法 t: 1.6mm
MOUNTING LAYOUT

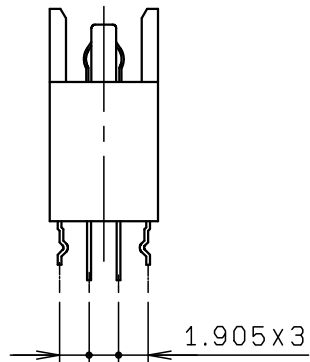

SECT. X-X (S=5:1)

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	PA66		COLOR: GRAY UL94V-0
2	CONTACT		N	PHOS-BRONZE		t=0.25mm
3	GUIDE PLATE		1	PBT		COLOR: GRAY UL94V-0

NO. OF POS.	A	B	C
20	11.43	14.43	18.43
30	17.78	20.78	24.78
40	24.13	27.13	31.13
50	30.48	33.48	37.48
60	36.83	39.83	43.83
68	41.91	44.91	48.91
80	49.53	52.53	56.53
100	62.23	65.23	69.23
120	74.93	77.93	81.93

注記
NOTE
1. 型番構成 P/N 10 5061 XXX 004 XXX +
極数 NO. OF POS.
バリエーション VARIATION
めっきコード PLATING CODE

PLATING CODE	CONTACT AREA	TAIL AREA	UNDER COAT
856	Au 0.1μm Min	Sn-Cu	Ni PLATED
861	Au 0.25μm Min		
871	Au 0.5μm Min		
863	Au 0.76μm Min		

② 図示の位置にロットNO. (6桁)を刻印する。
LOT NO. SHALL BE MARKED AT THE SPECIFIED POSITION. (6 DIGIT)
X X X X X X
年表示 2001 YEAR
月表示 1~9, O, N, D MONTH
製造コード LINE NO. 01~31
DATE

技術部
'24.09.05
発行

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格															
				A DCN19535		2019/06/25		S. HIBINO				M. YOSHIDA					
		UNIT mm		ANGLE 3RD		O EDN-592		2004/05/27		M. YOSHIDA		Y. SHIROYAMA		N. HAYASHI			
						NO. EDN/DCN		DATE		I ISSUE		CHECKED		APPROVED			
						PART NAME / 品名 SERIES 5061 PLUG ASSY ST DIP											
ANGLE / 角度 ±3°		SCALE 2 : 1		DATE 2004/05/27		PART NO. / 型番 10 5061 XXX 004 XXX +											
		DRAWN L I		DESIGNED M. YOSHIDA		CHECKED Y. SHIROYAMA		APPROVED N. HAYASHI		DWG NO. / 図番 BJS 5061246							
										SHEET REV 1 / 1 A							

KYOCERA