

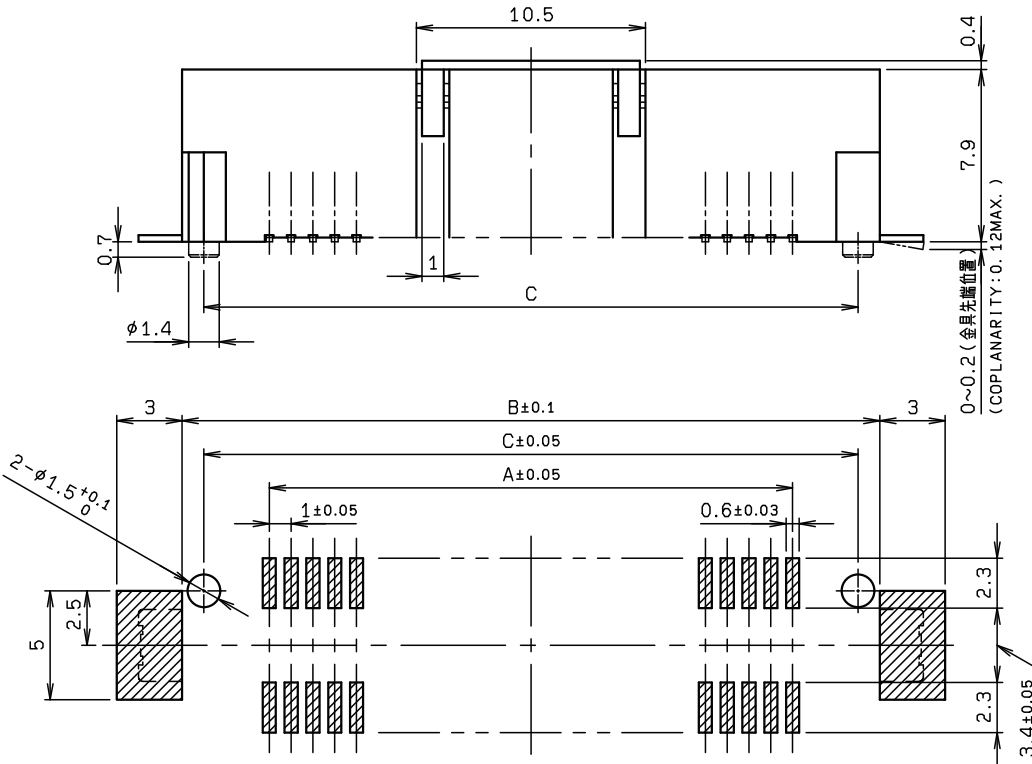



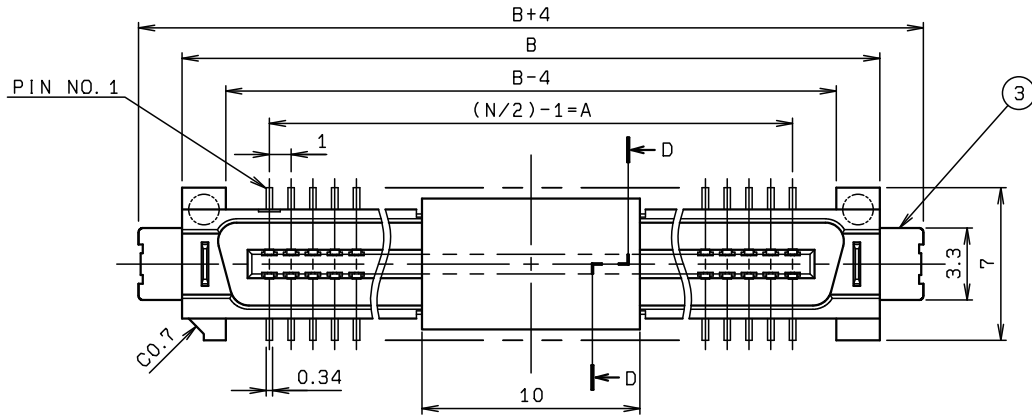

RECOMMENDED PATTERN

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	PPS		
2	CONTACT		N	PHOS-BRONZE		
3	ANCHOR PLATE		2	PHOS-BRONZE		
4	REMOVABLE CLIP		1	PPS		UL94V-0

P/N _____ 31 5077 XXX 1 X 2 XXX +
CODE _____ 31: PLUG ASSY WITH CLIP
SERIES _____ 5077: 5077 SERIES
NO. OF POS. _____
VARIATION 1 _____ 1: PLASTIC CLIP
VARIATION 2 _____ 0: WITHOUT BOSS
1: WITH BOSS
VARIATION 3 _____ 2: TYPE H2
PLATING CODE
861+: UNDER COATED: Ni 1.2~4μm
CONTACT AREA: Au0.25μmMIN.
TAIL AREA: Sn-Cu: 2~4μm
856+: UNDER COATED: Ni 1.2~4μm
CONTACT AREA: Au0.1μmMIN.
TAIL AREA: Sn-Cu: 2~4μm

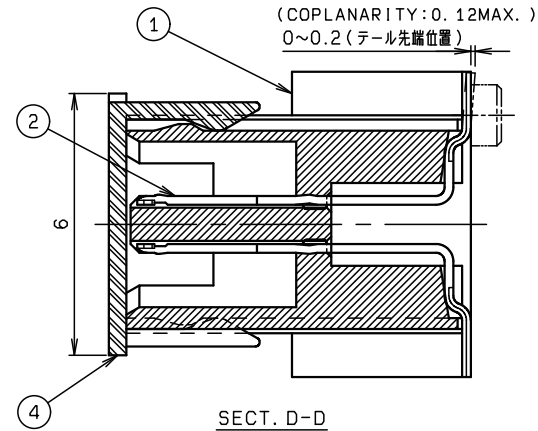

極数 NO. OF POS.	A	B	C
30	14.0	22.0	20.0
40	19.0	27.0	25.0
50	24.0	32.0	30.0

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		D	DCN-884	8-29-14			
				C	DCN-252	3-24-09	T. SUGIKI	M. YOSHIDA	T. MORI
10 ≤ X < 30 ±0.25		UNIT mm		O	EDN-784	10-08-03	T. TODA		K. ONO
30 ≤ X ±0.3		ANGLE 3RD		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE NTS		PART NAME / 品名					
DRAWN T. KOMATSU		DESIGNED T. TODA		SERIES 5077 PLUG ASSY ST SMT WITH CLIP (TYPE H2)					
		CHECKED		PART NO. / 製番					
		APPROVED K. ONO		31 5077 XXX 1X2 XXX +					
				DWG NO. / 図番					
				BJS 5077330					
				SHEET/REV 1/1 D					



KYOCERA

KYOCERA Corporation

DWG NO. / 図番
BJS 5077330

SHEET/REV
1/1 D

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	PLUG CONNECTOR		1			
2	VACUUM CLIP		1	PPS		UL94V-0

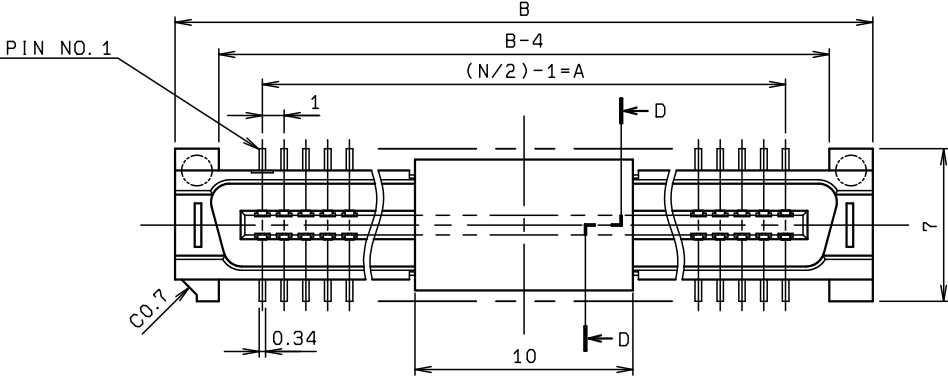

P/N 31 5077 XXX 1 X 2 XXX +

NO. OF POS. _____

VARIATION 1 _____

1 : PLASTIC CLIP

VARIATION 2 _____

2 : WITHOUT BOSS AND ANCHOR PLATE

3 : WITH BOSS, WITHOUT ANCHOR PLATE

VARIATION 3 _____




2 : TYPE H2

PLATING CODE _____

861 : UNDER COAT Ni 1.2~4μm
CONTACT AREA Au0.25μmMIN.
TAIL AREA Sn-Cu2~4μm

856 : UNDER COAT Ni 1.2~4μm
CONTACT AREA Au0.1μmMIN.
TAIL AREA Sn-Cu2~4μm

+ : Pb-free

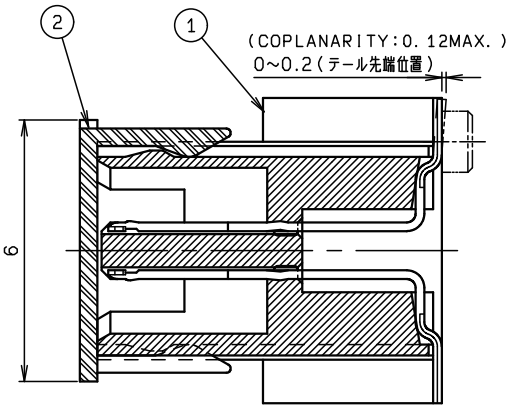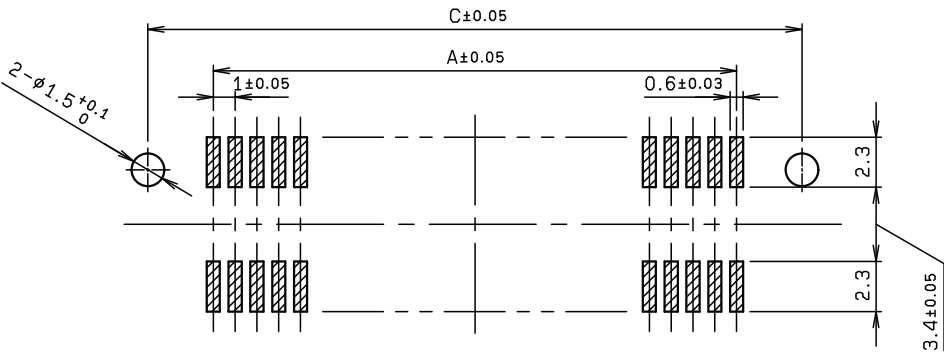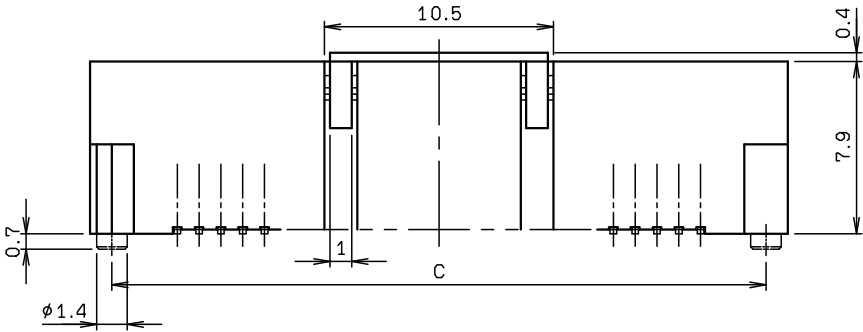


極 数 NO. OF POS.	A	B	C
30	14.0	22.0	20.0
40	19.0	27.0	25.0
50	24.0	32.0	30.0



SECT. D-D (S=8/1)

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2		UNIT		ANGLE		A DCN-816	8-11-14		
10 ≤ X < 30 ±0.25		mm		3RD		0 EDN-164	2-07-06	Y. AYUKAWA	Y. SHIROYAMA
30 ≤ X ±0.3		SCALE		DATE		NO. EDN/DCN	DATE	ISSUE	CHECKED
ANGLE / 角度 ±3°		4:1		2-07-06		PART NAME / 品名			
DRAWN T. KOMATSU		DESIGNED Y. AYUKAWA		CHECKED Y. SHIROYAMA		SERIES 5077 PLUG ASSY ST SMT WITH CLIP (TYPE H2)			
				APPROVED N. HAYASHI		PART NO. / 型番			
						31 5077 XXX 1X2 XXX +			
						DWG NO. / 図番			
						BJS 5077341			
						SHEET/REV			
						1/1 A			

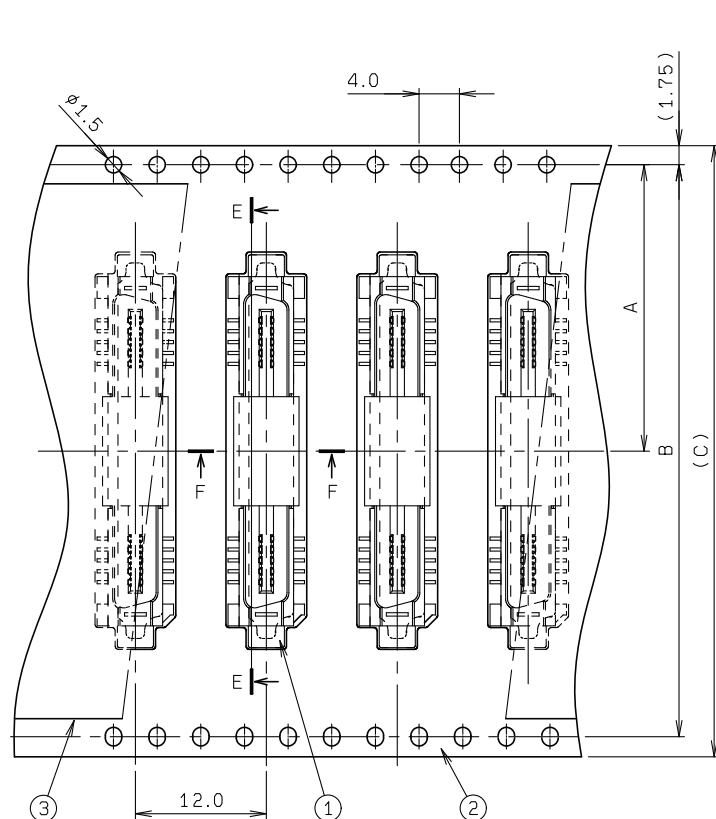


SECT. F-F

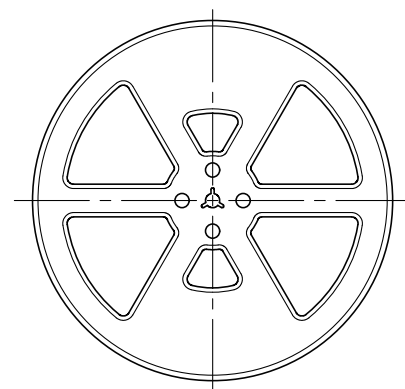

REEL DIMENSION (S=1:5)

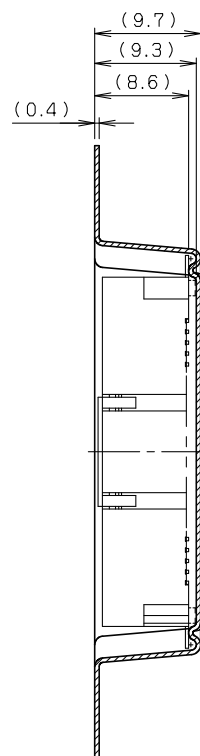

SECT. E-E

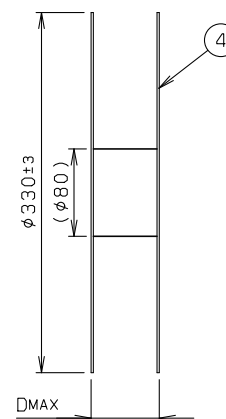


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	31 5077 XXX 1X2 XXX +	500	WITH PLASTIC CLIP		
2	EMBOSSSED TAPE		1	POLYSTYRENE (CLEAR)		
3	TOP COVER TAPE		1	POLYSTYRENE (CLEAR)		
4	REEL		1	POLYSTYRENE		


注 記 NOTE

1. 納入数量 : 500 個/reel
QUANTITY : 500 ea/reel
2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

製品の有無 SUPPLY	極数 NO. OF POS.	A	B	C	D
○	30	26.2	52.4	56.0	62.0
○	40	26.2	52.4	56.0	62.0
○	50	26.2	52.4	56.0	62.0



3. 引出し方向
USER DIRECTION OF FEED

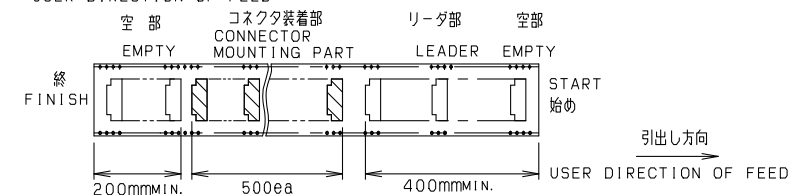

4. P/N 14 5077 XXX 1 X 2 XXX +

NO. OF POS. _____
030:30P, 040:40P, 050:50P

VARIATION

- 0:WITHOUT BOSS
1:WITH BOSS
2:WITHOUT BOSS AND ANCHOR PLATE
3:WITH BOSS,WITHOUT ANCHOR PLATE

PLATING CODE

861+: UNDER COATED: Ni 1.2~4 μ m
CONTACT AREA: Au0.25 μ m MIN.
TAIL AREA: Sn-Cu: 2~4 μ m

856+: UNDER COATED: Ni 1.2~4μm
CONTACT AREA: Au 0.1μm MIN
TAIL AREA: Sn-Cu: 2~4μm

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		B	DCN19572	2019/07/01	Y. KITAMURA	M. YOSHIDA	
				A	DCN-816	2014/08/11	T. MORI	N. HAYASHI	
				O	EDN-784	2003/10/08	T. TODA	K. ONO	
				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
				PART NAME / 品名					
±0.3		UNIT		ANGLE					
		mm		3RD					
		SCALE		DATE					
		2: 1		2003/10/08					
DRAWN	DESIGNED	CHECKED	APPROVED	PART NO. / 型番					
T. KOMATSU	T. TODA		K. ONO	14 5077 XXX 1X2 XXX +					
				DWG NO. / 図番				SHEET/REV	
				BJS 5077032				1/1 B	