

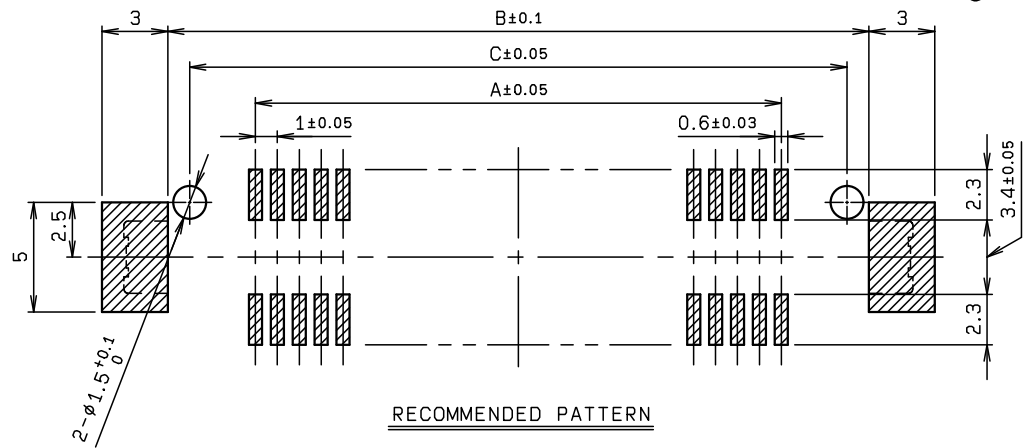
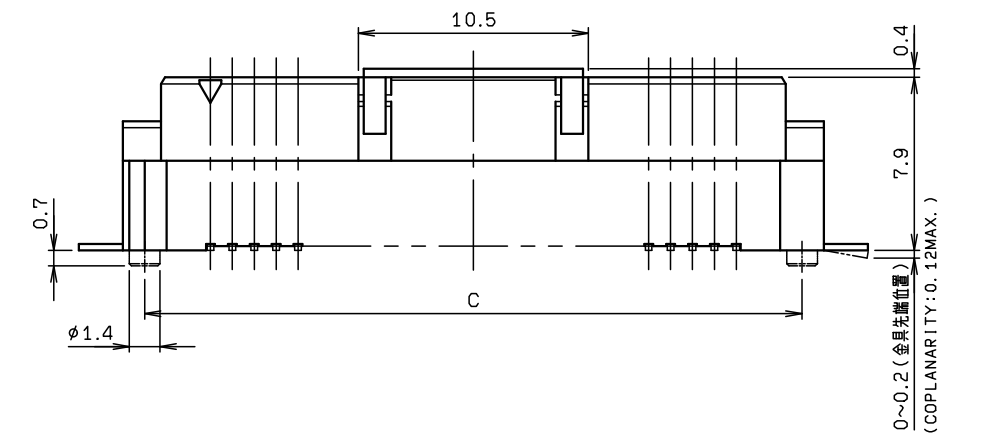



NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	PPS		
2	CONTACT		N	PHOS-BRONZE		
3	ANCHOR PLATE		2	PHOS-BRONZE		
4	REMOVABLE CLIP		1	PPS		UL94V-0

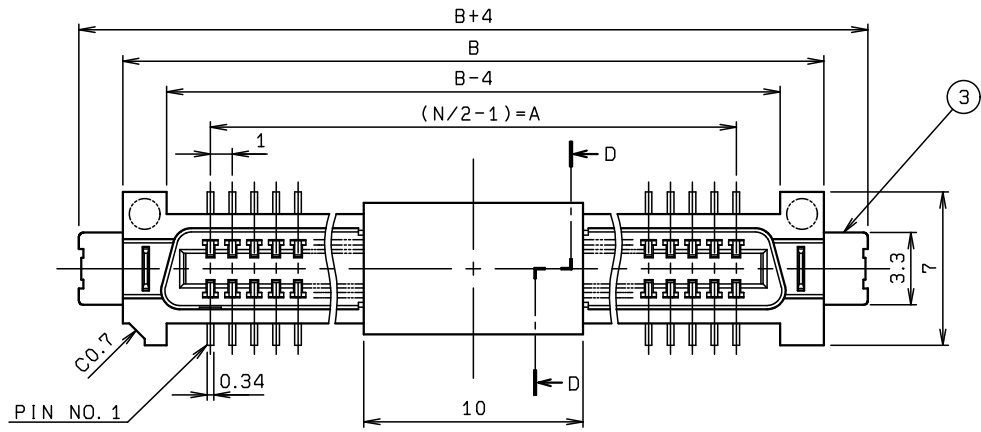

P/N 32 5077 XXX 1 X 2 XXX +
CODE 32: REC ASSY WITH CLIP
SERIES 5077: 5077 SERIES
NO. OF POS. 1
VARIATION 1 1: PLASTIC CLIP
VARIATION 2 0: WITHOUT BOSS
1: WITH BOSS
VARIATION 3 2: TYPE H2
PLATING CODE
861+: UNDER COATED: NI 1.2~4μm
CONTACT AREA: AU0.25μm MIN.
TAIL AREA: Sn-Cu: 2~4μm
856+: UNDER COATED: NI 1.2~4μm
CONTACT AREA: AU0.1μm MIN.
TAIL AREA: Sn-Cu: 2~4μm
863+: UNDER COATED: NI 0.5~3.5μm
CONTACT AREA: AU0.76μm MIN.
TAIL AREA: Sn-Cu 2~6μm




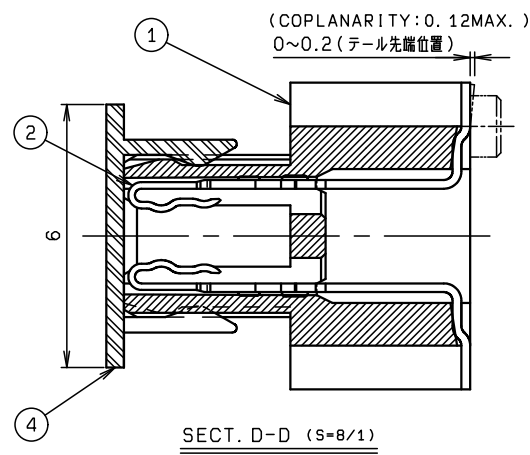


極数 NO. OF POS.	A	B	C
30	14.0	22.0	20.0
40	19.0	27.0	25.0
50	24.0	32.0	30.0


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		D	DCN-252	3-24-09			
X < 10 ±0.2				C	DCN-291	3-26-07	M. YOSHIDA		T. MORI
10 ≤ X < 30 ±0.25				O	EDN-784	10-08-03	T. TODA		K. ONO
30 ≤ X ±0.3				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE NTS		PART NAME / 品名					
DRAWN T. KOMATSU		DESIGNED T. TODA		DATE 10-08-03		SERIES 5077 REC ASSY ST SMT WITH CLIP (TYPE H2)			
		CHECKED		APPROVED K. ONO		PART NO. / 製番			
						32 5077 XXX 1X2 XXX +			
						DWG NO. / 図番			
						BJS 5077331			
						SHEET/REV 1/1 D			

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	REC CONNECTOR		1			H2
2	VACUUM CLIP		1	PPS		UL94V-0

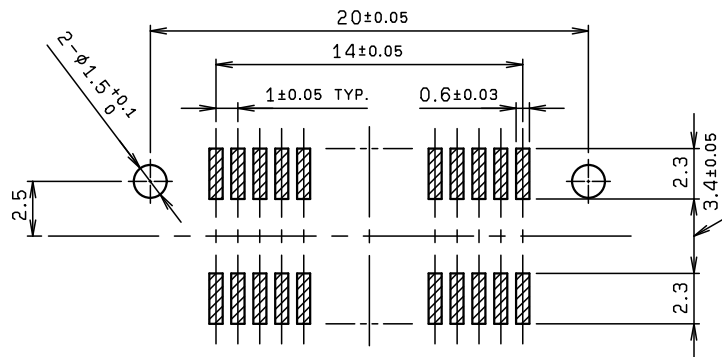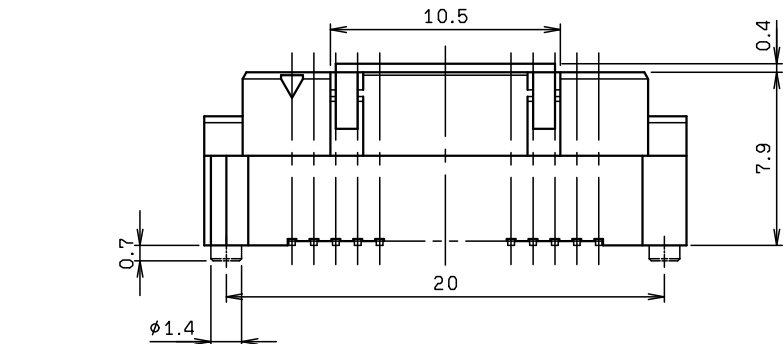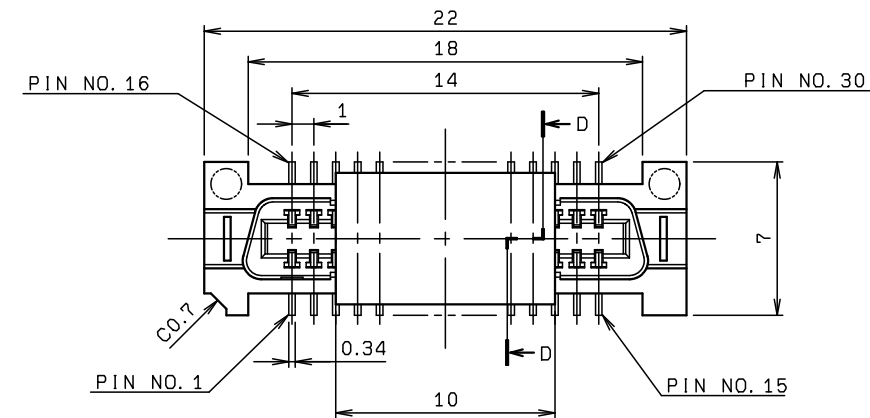

RECOMMENDED PATTERN

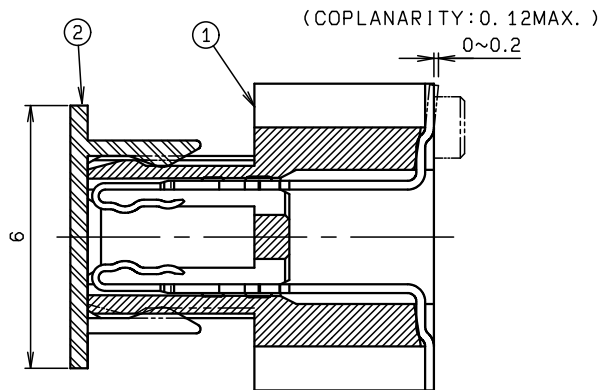

型番 P/N 32 5077 030 1 X 2 XXX +
NO. OF POS. 030:30P
VARIATION 1
1 : PLASTIC CLIP
VARIATION 2
2 : WITHOUT BOSS AND ANCHOR PLATE
3 : WITH BOSS, WITHOUT ANCHOR PLATE
VARIATION 3
2 : TYPE H2
PLATING CODE
861: UNDER COAT Ni 1.2~4 μ m
CONTACT AREA Au0.25 μ mMIN.
TAIL AREA Sn-Cu2~4 μ m
856: UNDER COAT Ni 1.2~4 μ m
CONTACT AREA Au0.1 μ mMIN.
TAIL AREA Sn-Cu2~4 μ m
+ : Pb-free

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS



TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2				0	EDN-164	2-07-06			
10 ≤ X < 30 ±0.25		UNIT		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
30 ≤ X ±0.3		mm		PART NAME / 品名					
ANGLE / 角度		SCALE		SERIES 5077 REC ASSY ST SMT					
±3°		4: 1		WITH CLIP (TYPE H2)					
		DATE		PART NO. / 型番					
		2-07-06		32 5077 030 1X2 XXX +					
DRAWN		DESIGNED		CHECKED		APPROVED		DWG NO. / 図番	
T. KOMATSU								BJS 5077342	
KYOCERA Corporation								SHEET/REV	
								1/1 0	




KYOCERA Corporation

SHEET/REV


1/1 0

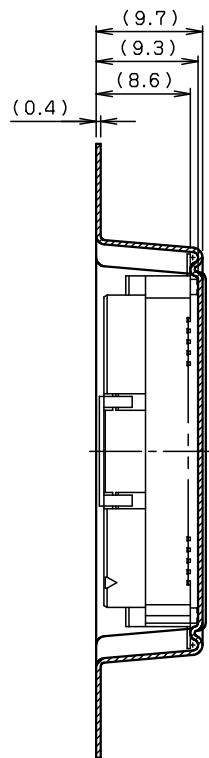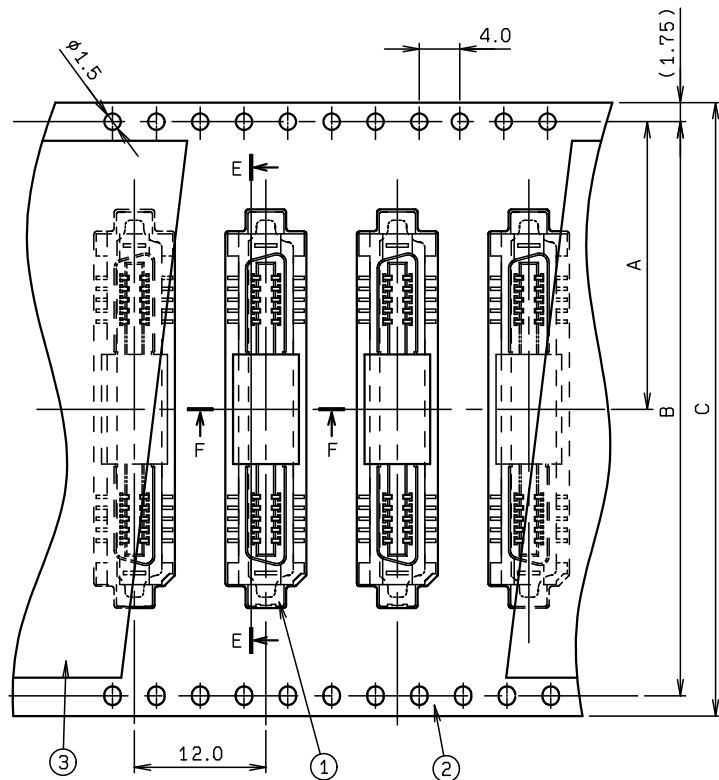


SECT. E-E



SECT. F-F

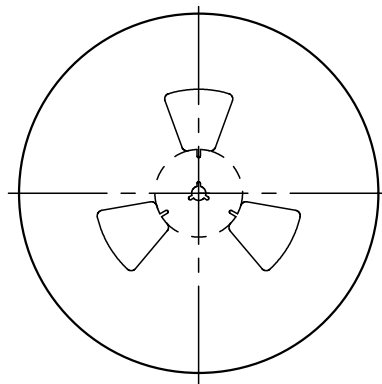


REEL DIMENSION
(S=1/5)

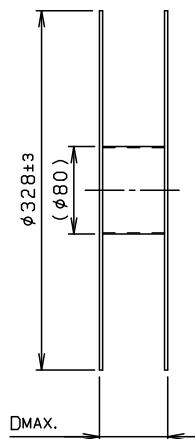


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	32 5077 XXX 1X2 XXX +	500	WITH PLASTIC CLIP		
2	EMBOSSED TAPE		1	POLYSTYRENE(CLEAR)		
3	TOP COVER TAPE		1	POLYSTYRENE(CLEAR)		
4	REEL		1	CORRUGATED CARDBOARD or POLYSTYRENE		

- 注 記
NOTE
1. 梱包数量 : 500 個/リール
PACKING QUANTITY : 500 ea/reel
 2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY



種 数 NO. OF POS.	A	B	C	D
30	26.2	52.4	56.0	62.4
40	26.2	52.4	56.0	62.4
50	26.2	52.4	56.0	62.4

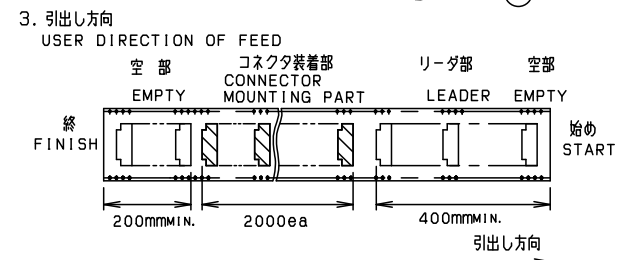

4. P/N 24 5077 XXX 1 X 2 XXX +

NO. OF POS.
030:30P, 040:40P, 050:50P

VARIATION
0:WITHOUT BOSS
1:WITH BOSS
2:WITHOUT BOSS AND ANCHOR PLATE
3:WITH BOSS.WITHOUT ANCHOR PLATE

PLATING CODE
861+:UNDER COATED:NI 1.2~4μm
CONTACT AREA:Au0.25μm MIN.
TAIL AREA:Sn-Cu:2~4μm
856+:UNDER COATED:NI 1.2~4μm
CONTACT AREA:Au0.1μm MIN
TAIL AREA:Sn-Cu:2~4μm
863+:UNDER COATED:NI 0.5~3.5μm
CONTACT AREA:Au0.76μm MIN.
TAIL AREA:Sn-Cu 2~6μm

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

MATERIAL / 材質		PRODUCT SPEC / 製品規格					
				A	DCN-291	3-26-07	
FINISH / 仕上げ		TOLERANCE / 一般公差		0	EDN-784	10-08-03	T. TODA
		±0.3		NO.	EDN/DCN	DATE	ISSUE
UNIT		SCALE	DATE	PART NAME / 品名			
mm	3RD	2:1	10-08-03	SERIES 5077 REC ASSY TAPING(TYPE H2)			
DRAWN	DESIGNED	CHECKED	APPROVED	PART NO. / 型番			
T. KOMATSU	T. TODA		K. ONO	24 5077 XXX 1X2 XXX +			
DWG NO. / 図番		KYOCERA Corporation		SHEET/REV			
BJS 5077034				1/1 A			