
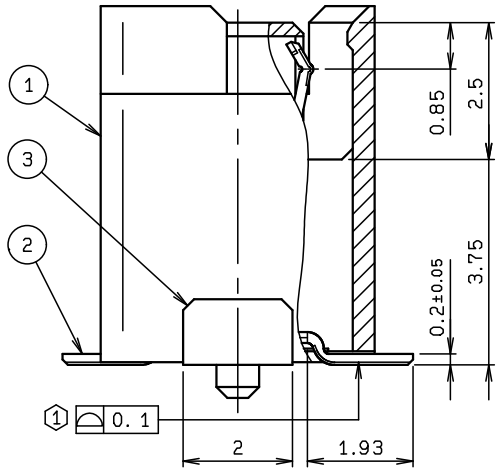

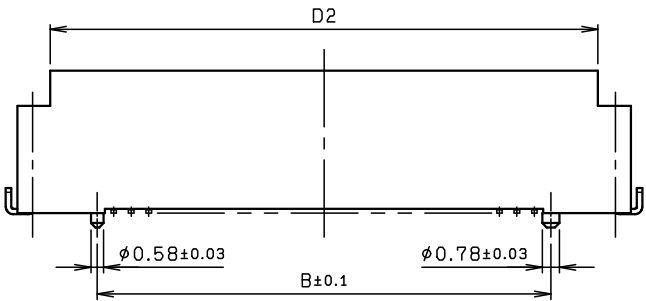


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	LCP		UL94V-0 COLOR :BLACK
2	CONTACT		N	PHOS-BRONZE		AU CONTACT AREA Sn-Cu:TAIL AREA
3	ANCHOR PLATE		2	COPPER ALLOY		Sn-Cu

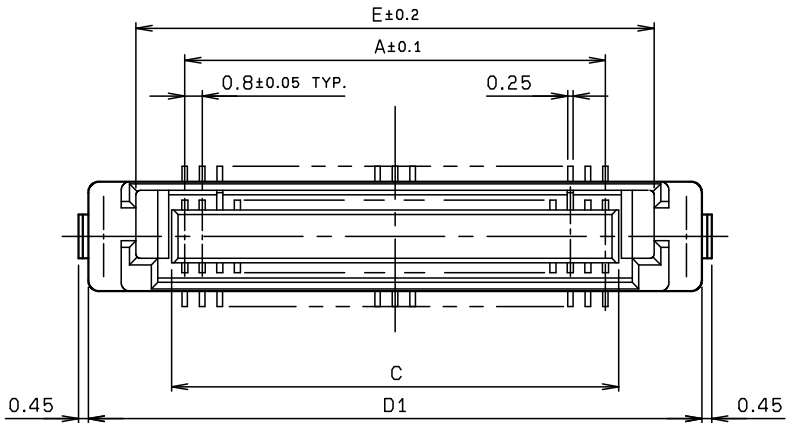


極 数 NO. OF POS.	A	B	C	D1	D2	E
30	11.2	12.7	12.4	20.0	17.0	15.65
40	15.2	16.7	16.4	24.0	21.0	19.65

※この表は1ページ目のみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 ONLY.

注 記
NOTE

① テール底面及び固定金具の相互のバラツキは 0.1MAX.
COPLANARITY OF CONTACT TAILS AND ANCHOR PLATE
SHALL BE 0.1MAX.

※この注記は1ページ目のみ適用
※THIS NOTES IS APPLICABLE TO
SHEET-1 ONLY.

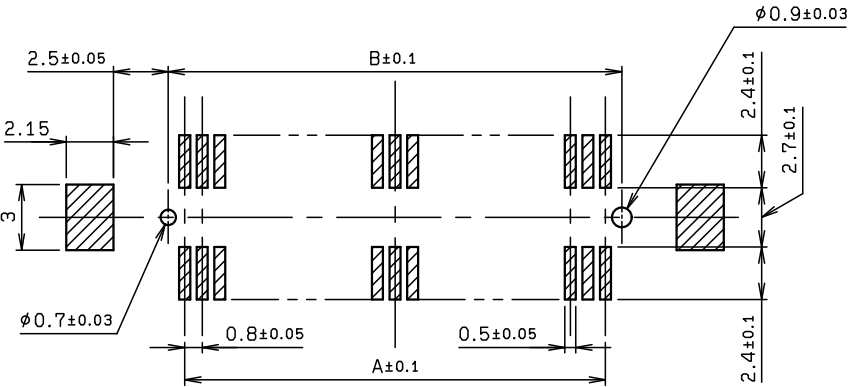


推奨基板レイアウト
RECOMMENDED P. C. BOARD LAYOUT



TOLERANCE / 一般公差(S) ±0.3		PRODUCT SPEC / 製品規格		B	DCN20818	2020/08/31	H. TAMAI		M. YOSHIDA
				A	DCN19603	2019/07/05	H. TAMAI		M. YOSHIDA
		UNIT		O	EDN-026	2004/01/13	C. YAMATO		K. ONO
		mm		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
		SCALE		PART NAME / 品名					
		NTS		SERIES 5600 REC ASSY ST SMT					
		DATE		SMALL ANCHOR PLATE TYPE					
		2004/01/13							
DRAWN	DESIGNED	CHECKED	APPROVED	PART NO. / 製番					
T. KOMATSU	C. YAMATO		K. ONO	24 5600 0XX 200 883 +					
		DWG NO. / 図番		BJS 5600029					
				SHEET/REV 1/2 B					

KYOCERA

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

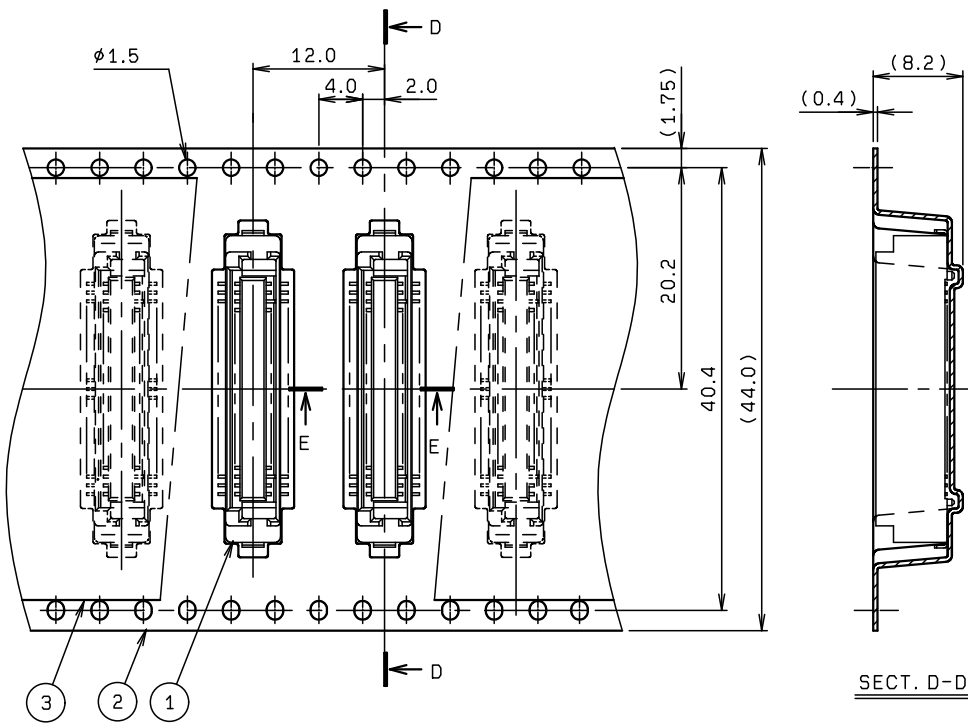

SECT. D-D

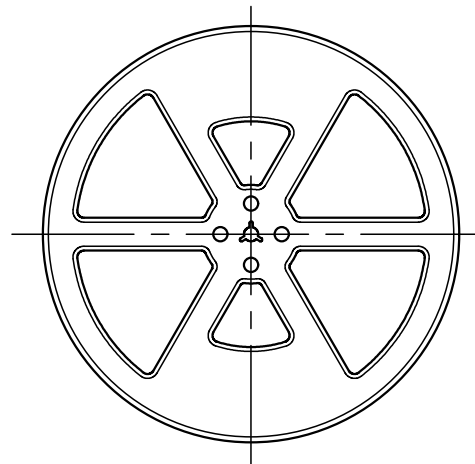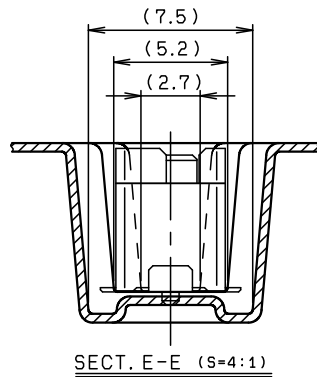

REEL DIMENSION (S=1:5)


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	24 5600 OXX 200 883 +	1000			20 5600 OXX 200 883 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	PET		
4	REEL		1	POLYSTYRENE		


注 記
NOTE

1. 梱包数量 : 1000個/リール
PACKING QUANTITY : 1000 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

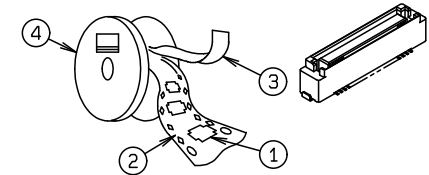

3. 引出し方向
USER DIRECTION OF FEED

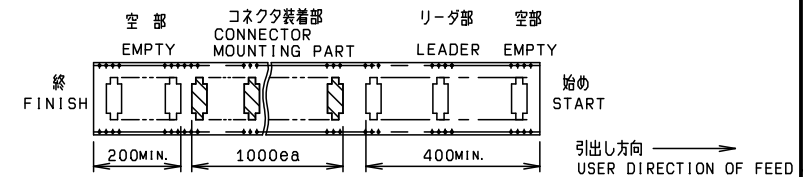

4. 型番
P/N 24 5600 OXX 200 883 +

極数
NO. OF POS.
030 : 30P
040 : 40P

バリエーション
VARIATION
200 : 金具小
SMALL ANCHOR PLATE

めっきコード
PLATING CODE
883 : NI UNDER COAT (ALL OVER)
CONTACT AREA : AU 0.1μmMIN.
TAIL AREA : Sn-Cu 2μmMIN.

めっき
PLATING
+ : Sn-Cu

※この注記の1~3は2ページ目にも適用
※THIS NOTES 1 TO 3 ARE APPLICABLE TO
SHEET-2 ONLY.

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2		UNIT		ANGLE		REFER TO SHEET 1/2			
10 ≤ X < 30 ±0.25		mm		3RD		NO. EDN/DCN		DATE	
30 ≤ X ±0.3		SCALE		DATE		ISSUE		CHECKED	
ANGLE / 角度 ±3°		2 : 1		2004/01/13		APPROVED		APPROVED	
DRAWN T. KOMATSU		DESIGNED C. YAMATO		CHECKED		APPROVED K. ONO		PART NO. / 型番	
								24 5600 OXX 200 883 +	
								DWG NO. / 図番	
								BJS 5600029	
								SHEET/REV	
								2/2 B	

KYOCERA