


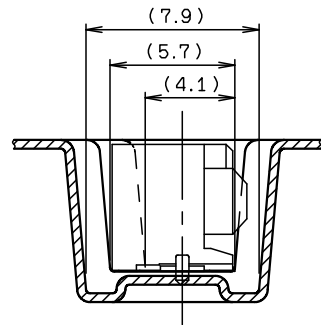


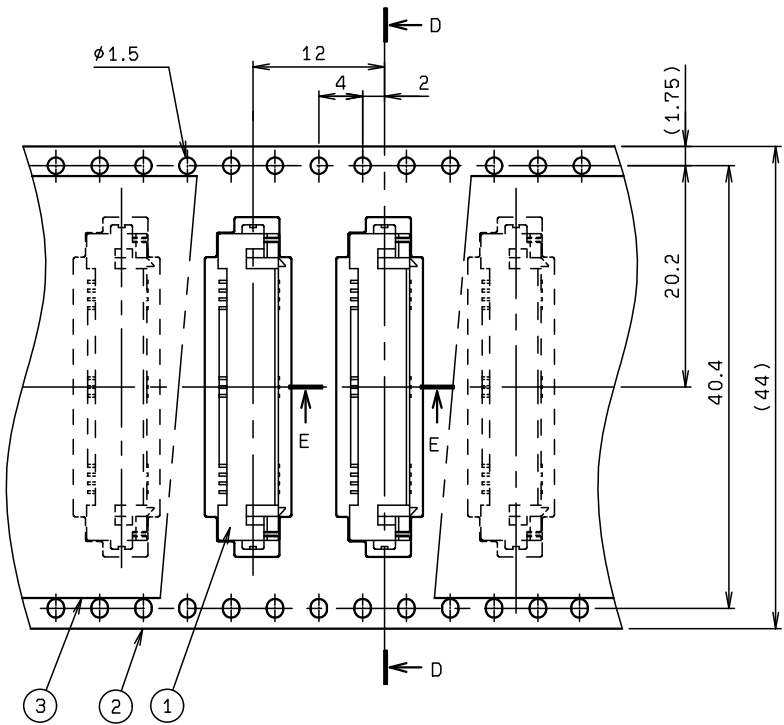


SECT. E-E (S=4:1)

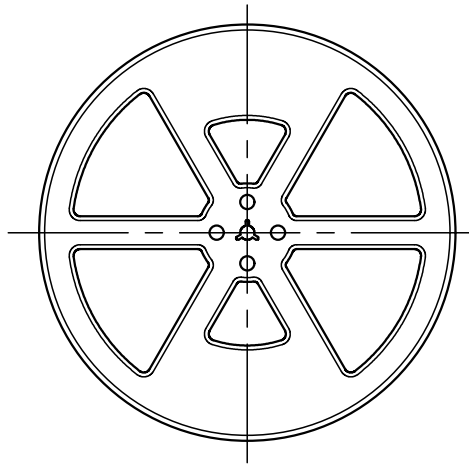

REEL DIMENSION (S=1:5)

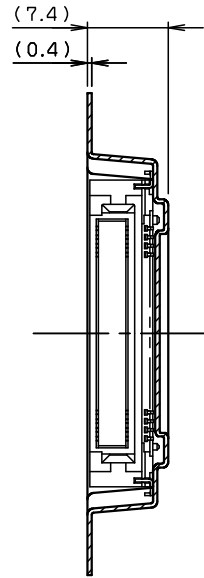

SECT. D-D

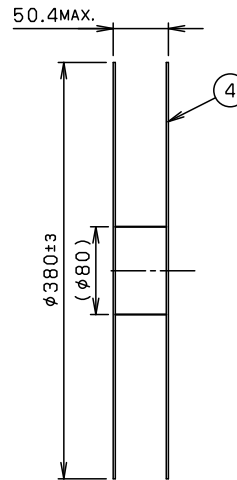


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	14 5600 050 000 XXX X/+	1000			10 5600 050 000 XXX X/+
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

注 記


NOTE 1. 梱包数量 : 1000個/リール
PACKING QUANTITY : 1000 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY



3. 引出し方向

USER DIRECTION OF FEED

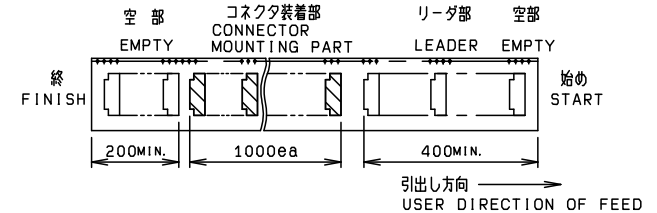

4. 型番
P/N

14 5600 050 000 XXX X / +

種数

NO. OF POS.

めっきコード

PLATING CODE

883 : Ni UNDER COAT
CONTACT AREA Au 0.1 μ mMIN.
TAIL AREA Sn-Cu

829 : Ni UNDER COAT
CONTACT AREA Au 0.1 μ mMIN.
TAIL AREA Au 0.03 μ mMIN.

868 : SELECTIVE GOLD PLATING TYPE
CONTACT AREA Au 0.1 μ mMIN.
TAIL AREA Au 0.03 μ mMIN. (実装面及び側面)
SELECTIVE GOLD FOR BOTTOM
AND SIDE SURFACE

バリエーション

VARIATION

無し : 材料めっき仕様

PRE-PLATE

M : 後めっき仕様

PAST-PLATE

※この注記の1～3は2ページ目にはのみ適用

※THIS NOTES 1 TO 3 ARE APPLICABLE TO
SHEET-2 ONLY.

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ± 0.2									
10 $\leq$ X < 30 ± 0.25									
30 $\leq$ X ± 0.3									
ANGLE / 角度 $\pm 3^\circ$									
DRAWN T. KOMATSU		DESIGNED Y. SHIROYAMA		CHECKED		APPROVED N. HAYASHI		PART NO. / 型番 14 5600 050 000 XXX X / +	
								DWG NO. / 図番 BJS 5600035	
								SHEET/REV 2/2 D	

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

KYOCERA