

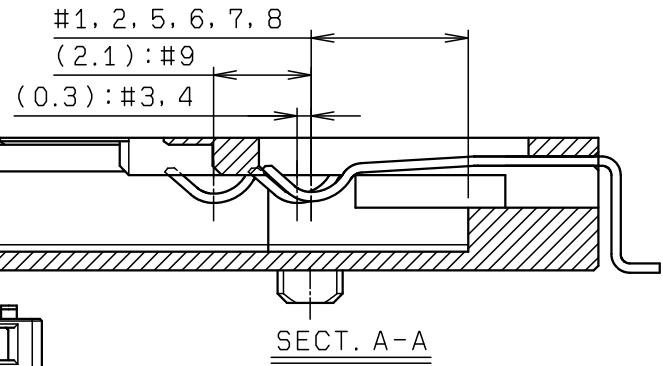
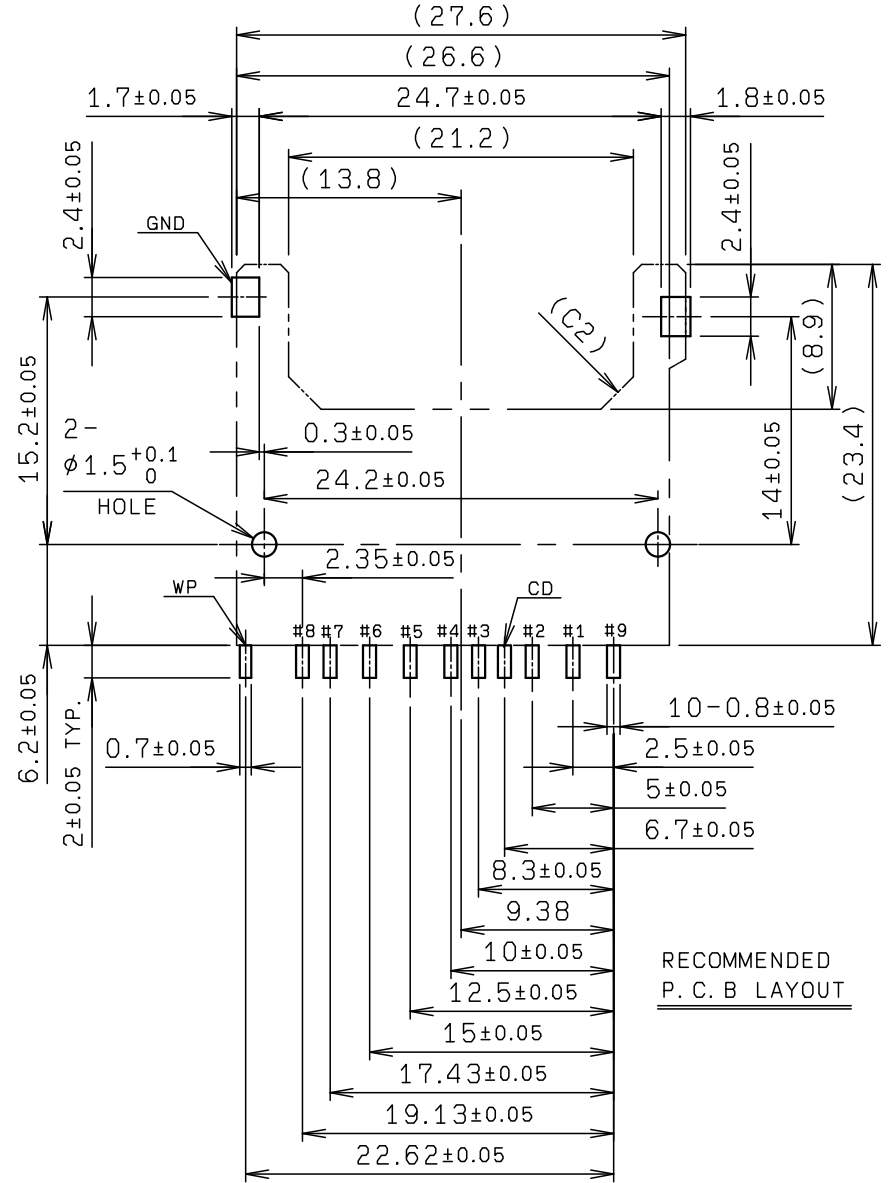
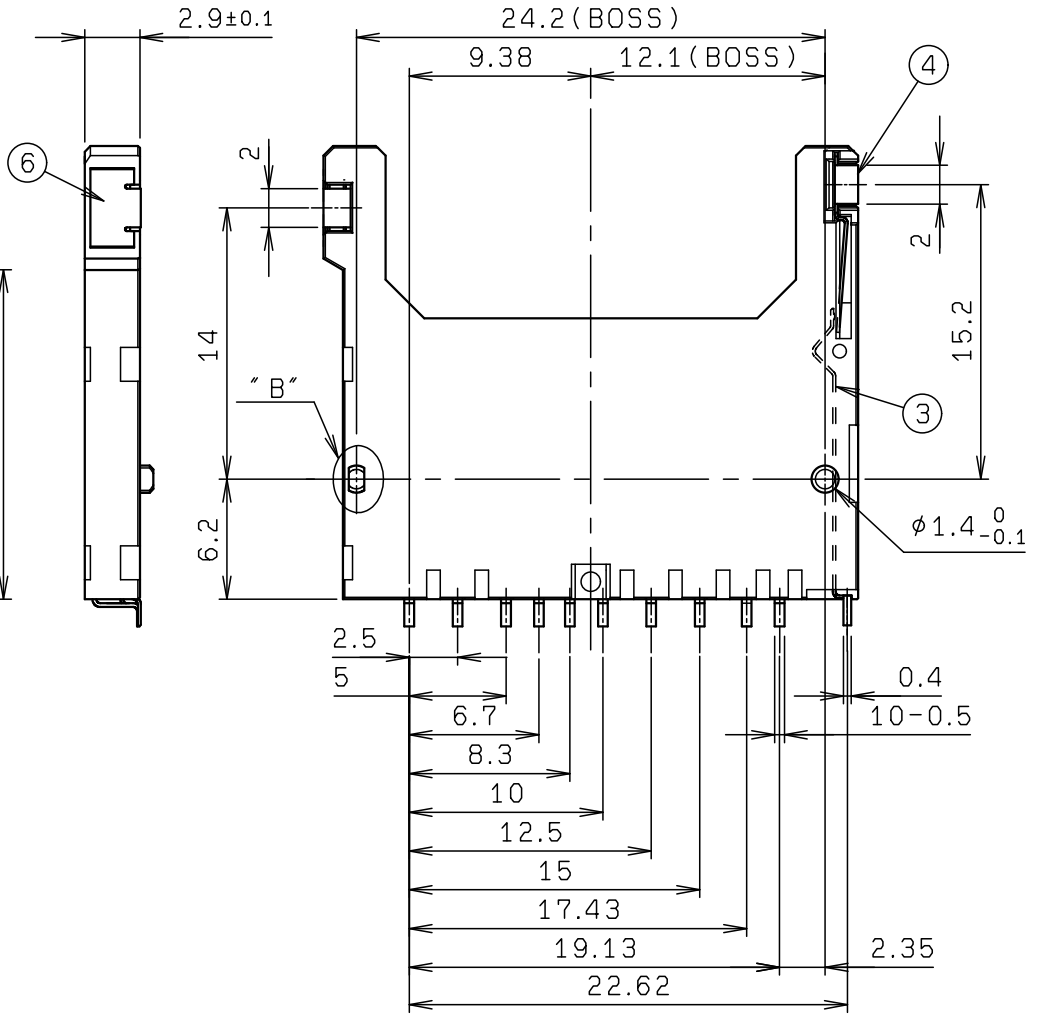




ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

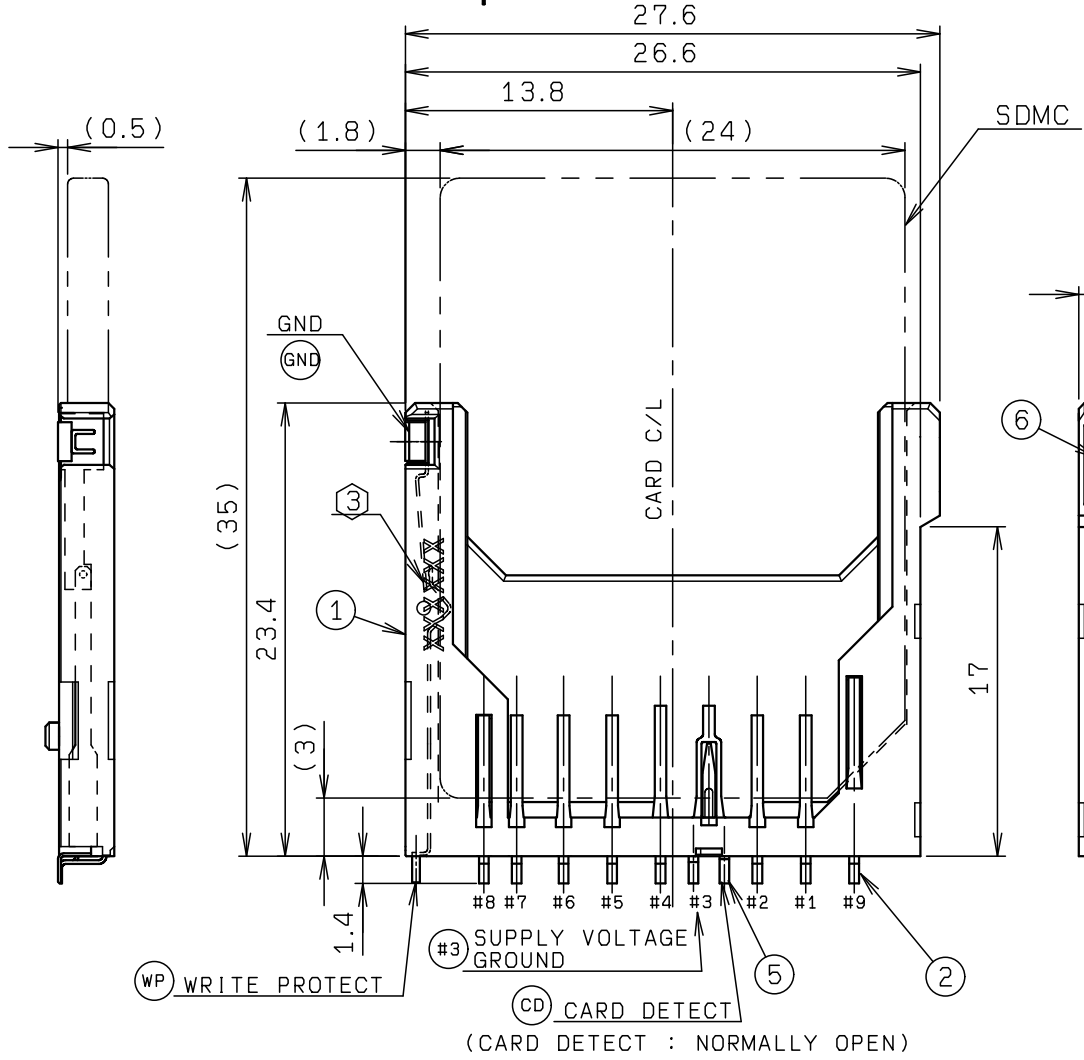

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	LCP		UL94-V0
2	CONTACT		9	PHOS-BRONZE		Au
3	WRITE PROTECT CONTACT		1	PHOS-BRONZE		Au
4	GROUND CONTACT		1	PHOS-BRONZE		Au
5	CARD DETECT CONTACT		1	PHOS-BRONZE		Au
6	ANCHOR PLATE		1	BRASS		Ni, Sn-Cu



注 記
NOTE

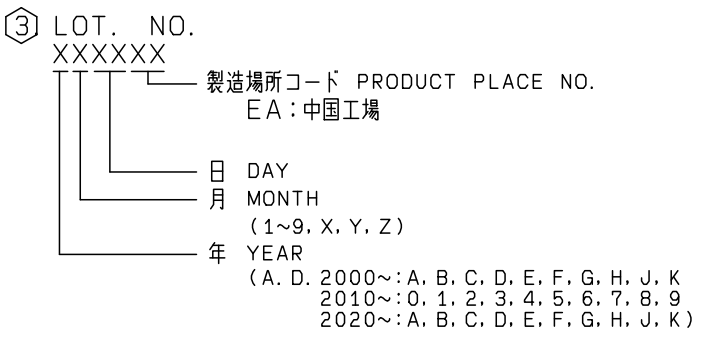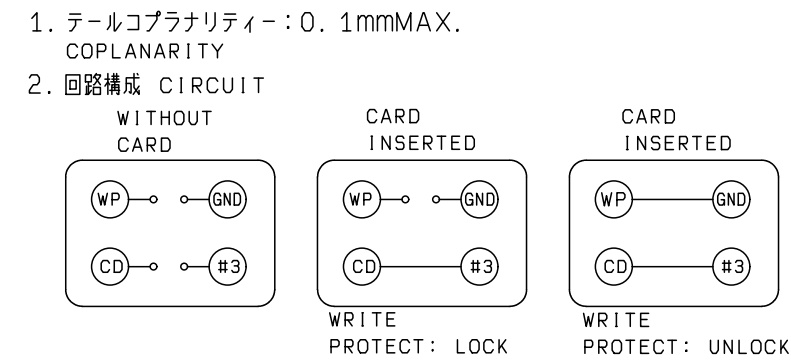


TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格					
X < 10 ±0.2 10 ≤ X < 30 ±0.25 30 ≤ X ±0.3		UNIT mm ANGLE 3RD		O EDN-503		2017/11/13	
ANGLE / 角度 ±3°		SCALE NTS		NO. EDN/DCN		DATE	
DRAWN M. TAKAHASHI		DESIGNED		CHECKED		APPROVED	
DWG NO. / 図番 BJS 5638041		PART NO. / 型番 14 5638 109 211 839 +		PART NAME / 品名 SERIES 5638 SDMC ASSY TYPE REVERSE WITHOUT EJECT		ISSUE	
KYOCERA Corporation		SHEET REV 1 1/2 0		CHECKED		APPROVED	

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	14 5638 109 211 839 +	350			10 5638 109 211 839 +
2	EMBOSS TAPE		1	PS		
3	TOP COVER TAPE		1	PET		
4	REEL		1	PS		


注 記
NOTE

1. 梱包数量 : 350 個/リール
PACKING QUANTITY : 350 ea/reel

2. 納入時のリール巻方向
REELING DIRECTION IN DELIVERY

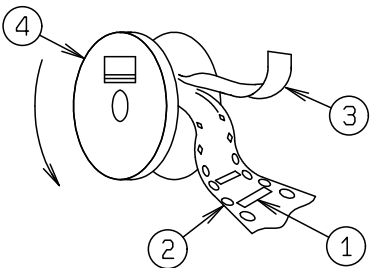

3. 引出し方向
USER DIRECTION OF FEED

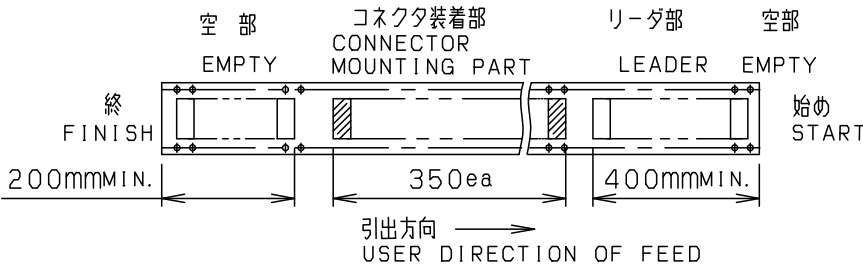


4. 型 番 14 5638 109 211 839 +
P/N
極 数 NO. OF POS.
めっきコード PLATING CODE
839+:Au


※この注記の1～3は2ページ目にはみ適用
※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-2 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2									
10 ≤ X <30 ±0.25									
30 ≤ X ±0.3									
ANGLE / 角度 ±3°									
DRAWN M. TAKAHASHI		DESIGNED		CHECKED		APPROVED		PART NO. / 型番	
								14 5638 109 211 839 +	
								DWG NO. / 図番	
								BJS 5638041	
								SHEET / REV	
								12/2 0	

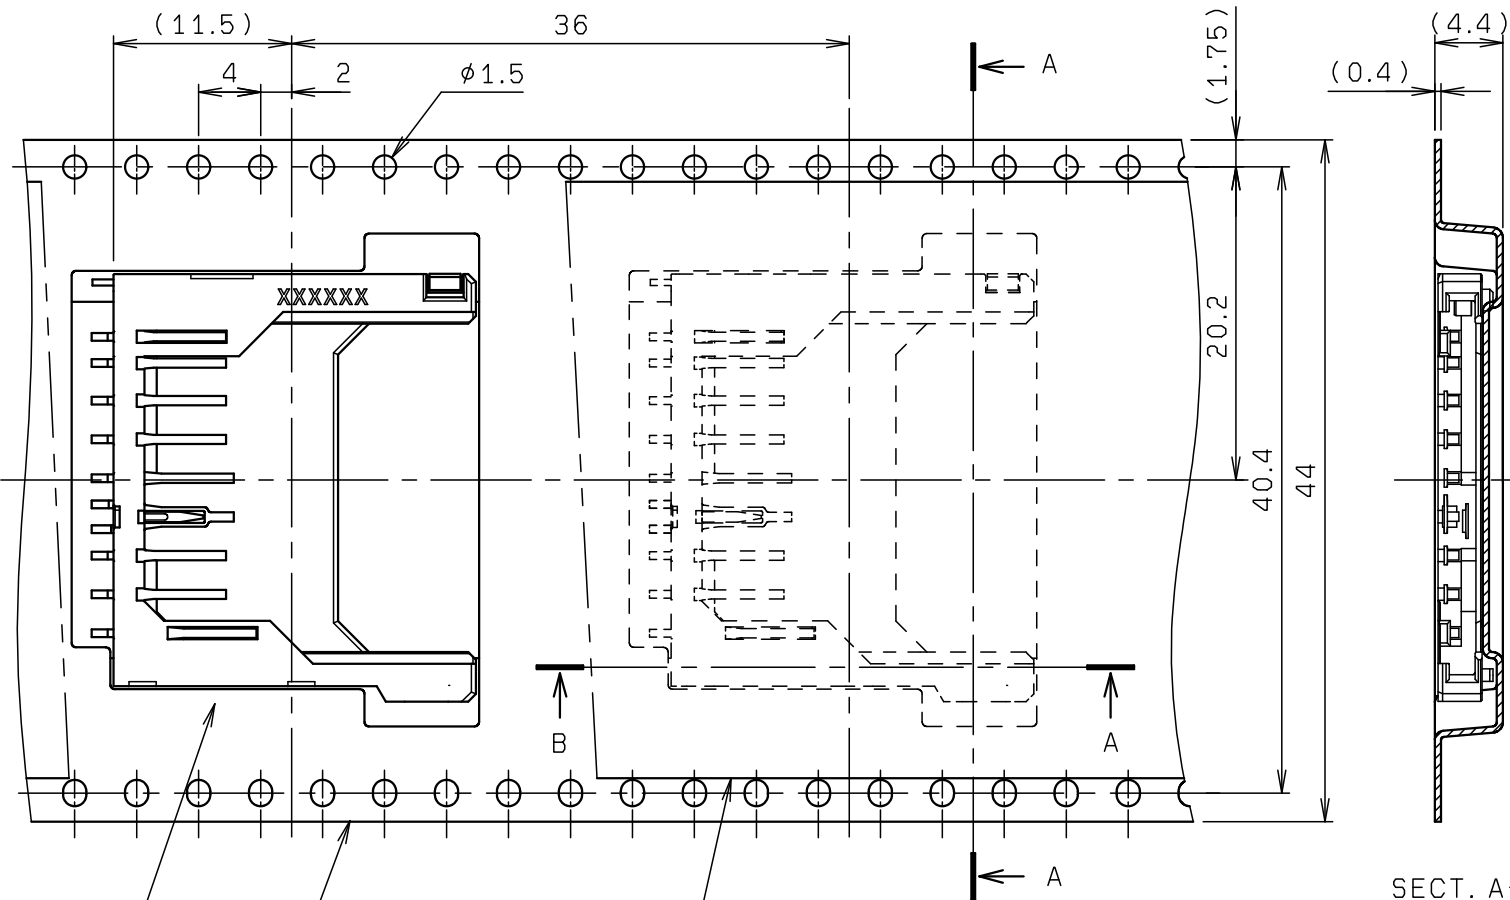

SECT. A-A

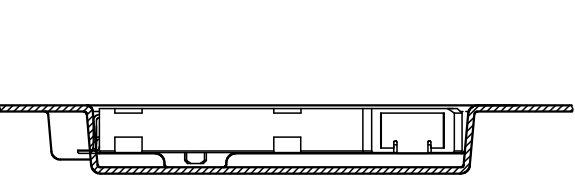

SECT. B-B

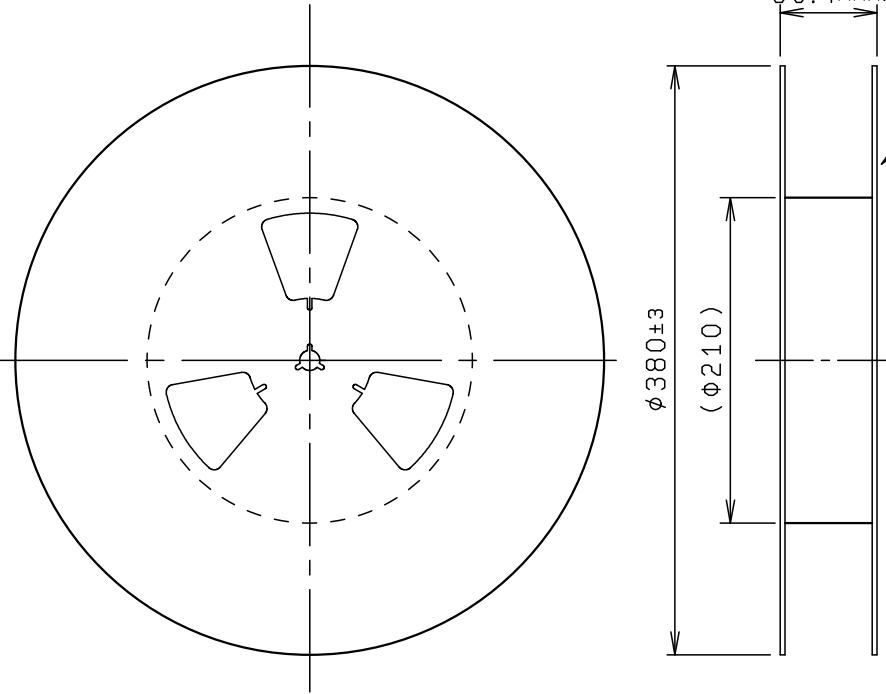

REEL DIMENSION (S=1:5)