

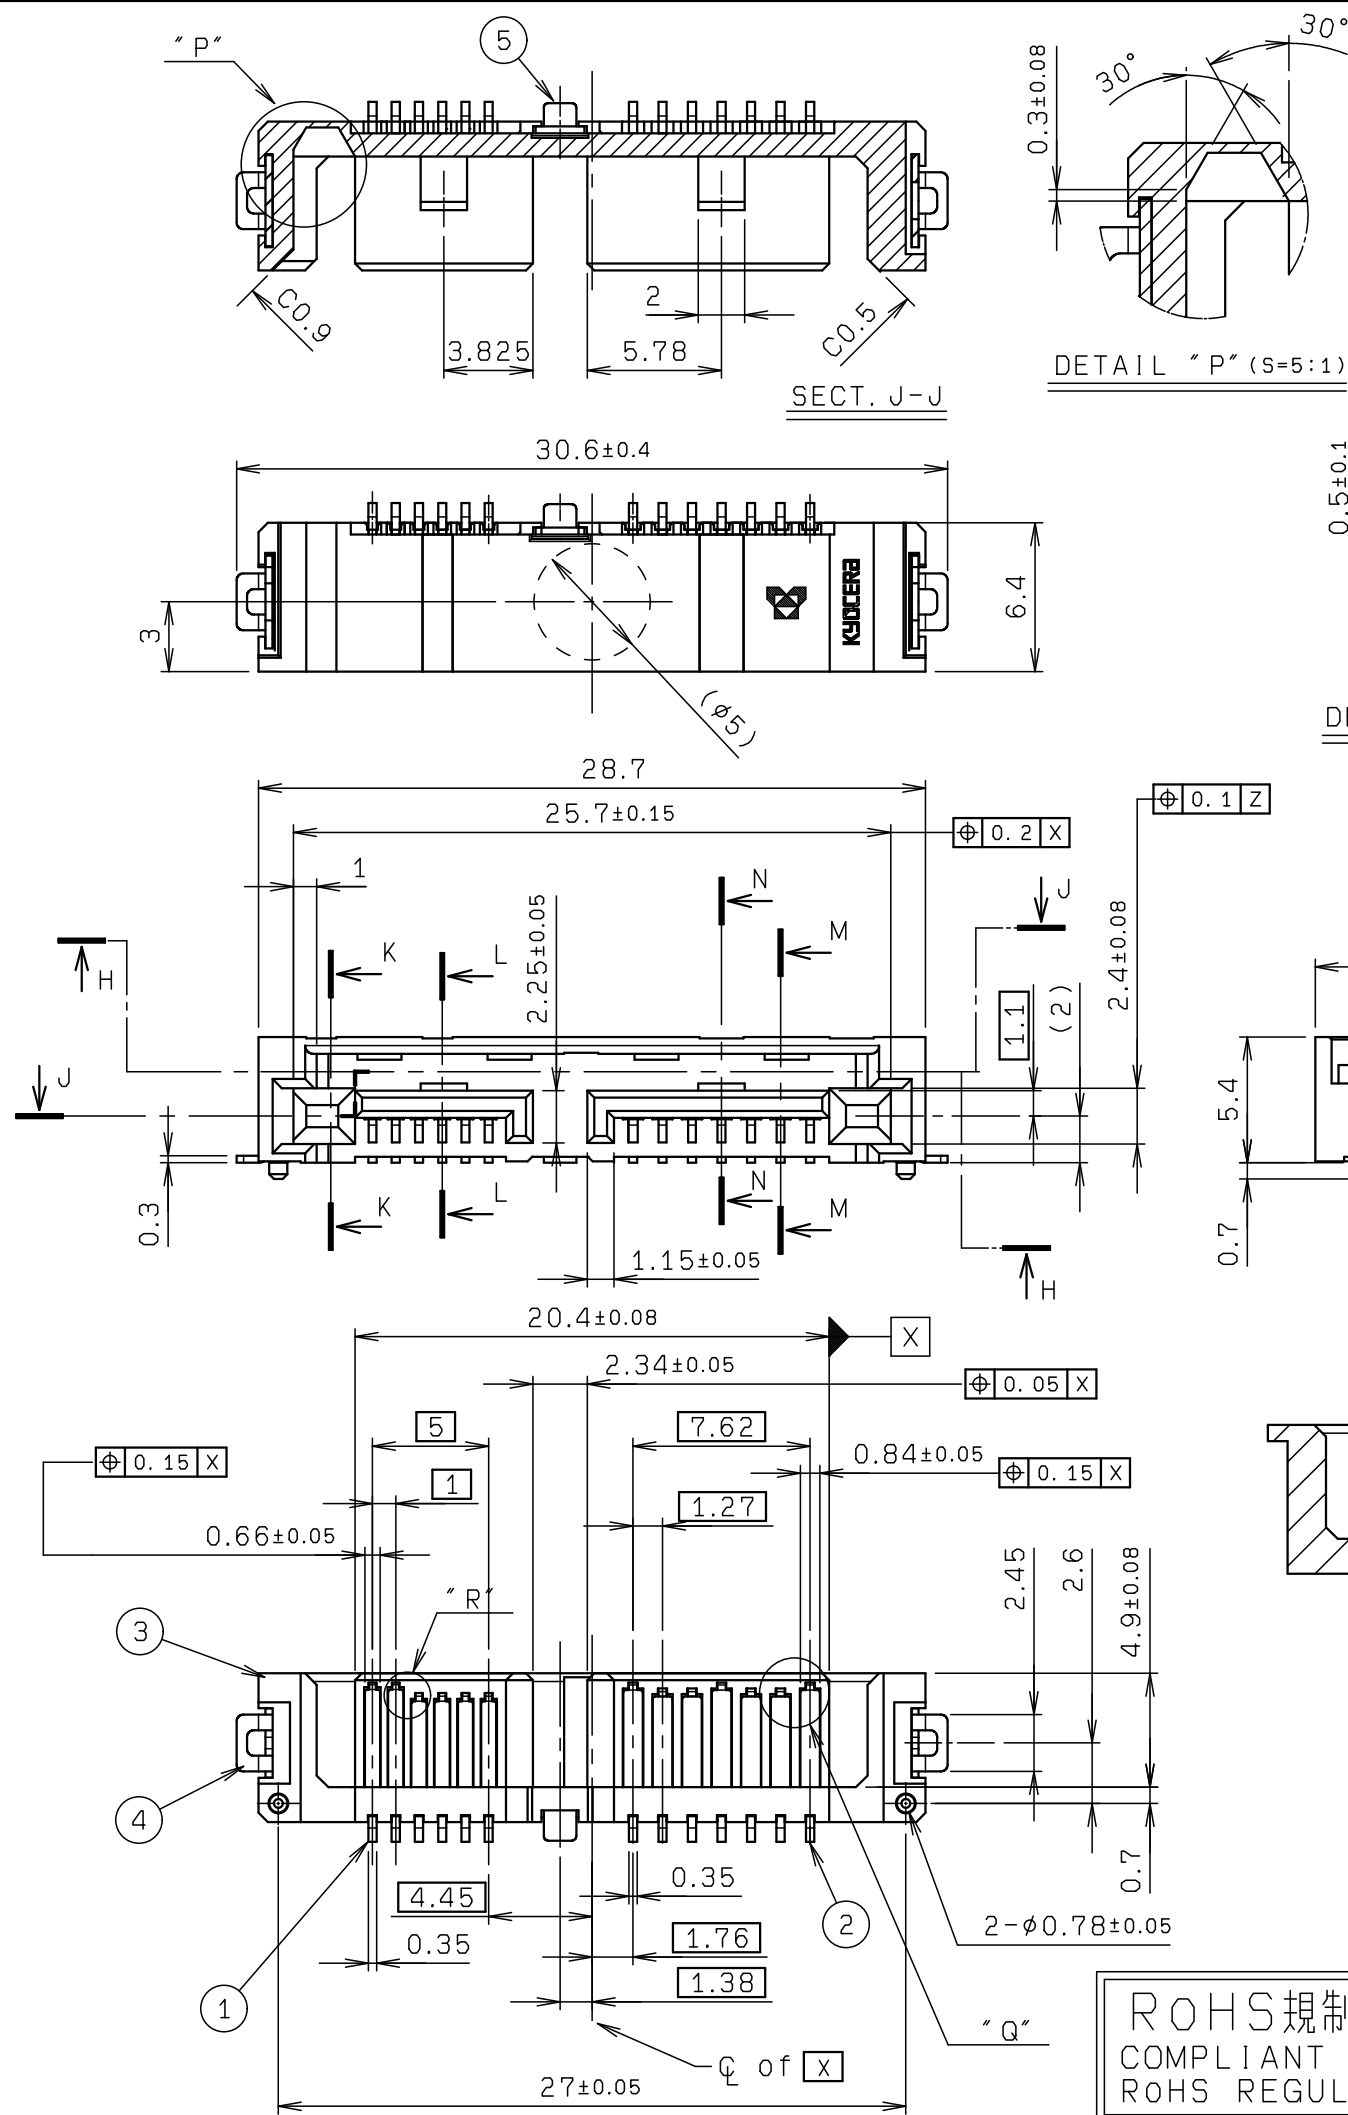


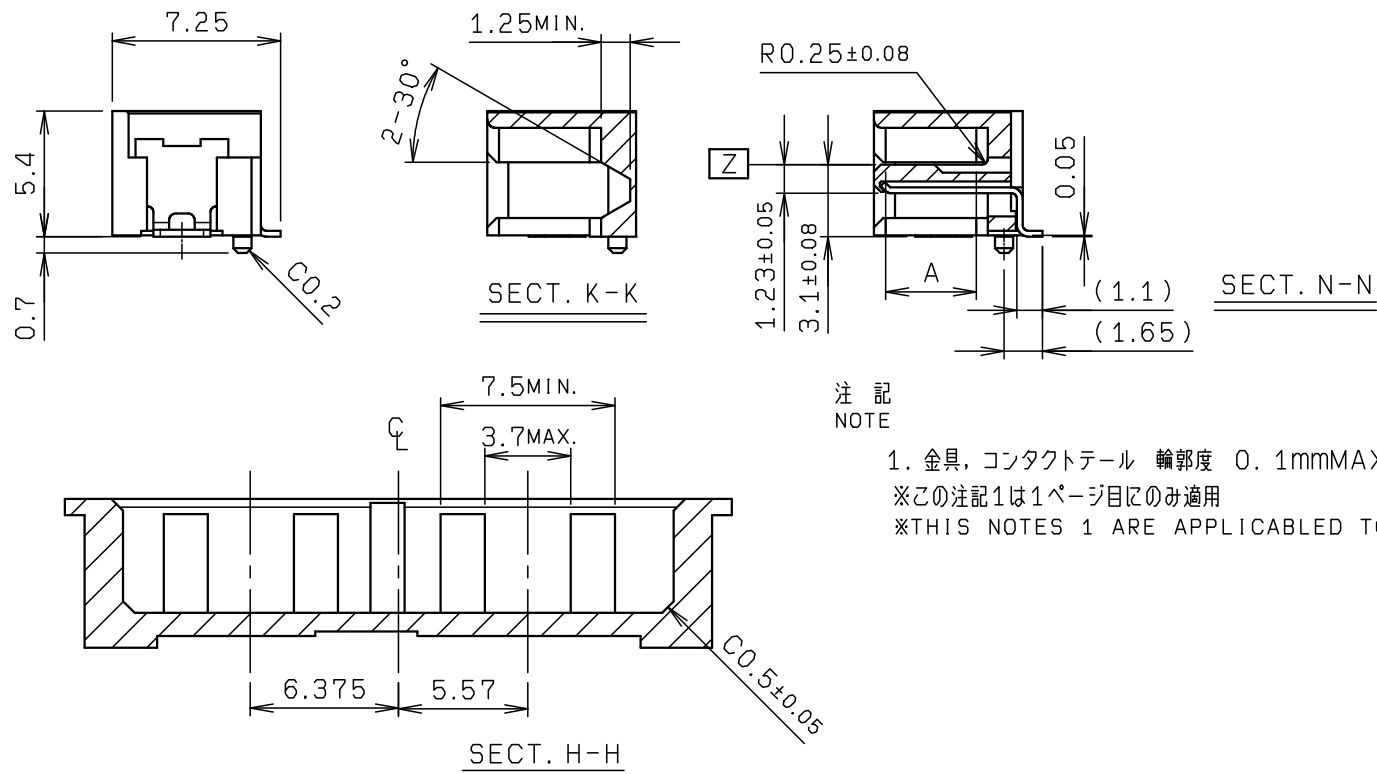

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	PLUG CONTACT		6	COPPER ALLOY		
2	PLUG CONTACT		7	COPPER ALLOY		
3	PLUG INSULATOR		1	HEAT RESISTANCE PLASTIC		UL94V-0 COLOR: BLACK
4	ANCHOR PLATE		2	COPPER ALLOY		
5	CENTER ANCHOR PLATE		1	COPPER ALLOY		

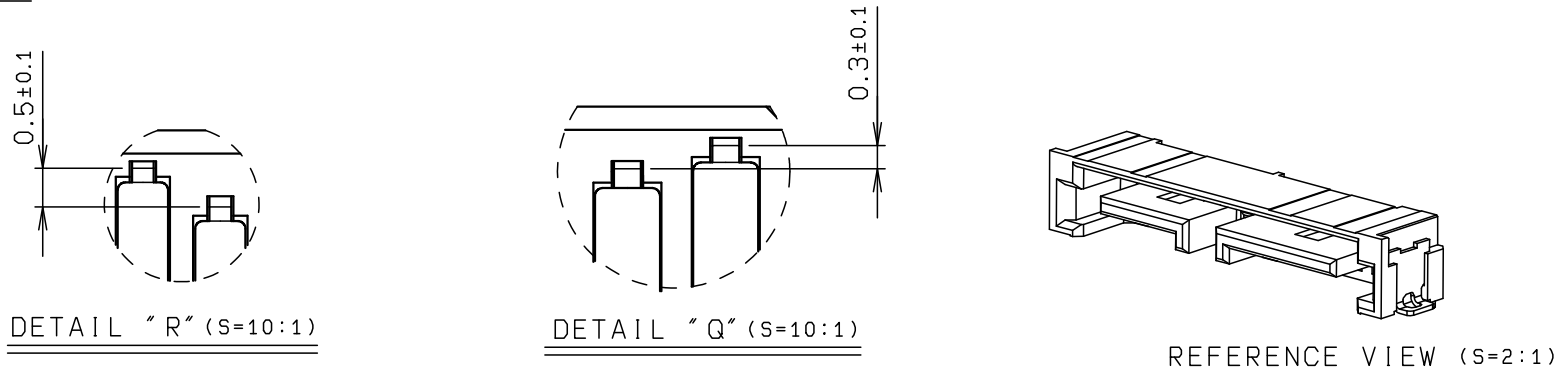




注記
NOTE
1. 金具, コンタクトテール 輪郭度 0.1mmMAX.
※この注記1は1ページ目へのみ適用
※THIS NOTES 1 ARE APPLICABLE TO SHEET-1 ONLY.

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		D	DCN22071	2022/01/31	Y. KITAMURA		M. YOSHIDA
X < 10 ±0.2				C	DCN20656	2020/06/30	M. YOSHIDA		F. IKEGAMI
10 ≤ X < 30 ±0.25				O	EDN-336	2007/05/15	M. YOSHIDA		T. MORI
30 ≤ X ±0.3				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE 3 : 1		PART NAME / 品名					
DRAWN M. YOSHIDA		DESIGNED M. YOSHIDA		SERIES 5650 S-ATA PLUG ASSY RA SMT 13P WITH CENTER ANCHOR					
CHECKED		APPROVED T. MORI		PART NO. / 型番					
				14 5650 013 00X XXX +					
				DWG NO. / 図番					
				BJS 5650003					
				SHEET / REV					
				1 / 4 D					

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS




© 2022 KYOCERA Corporation

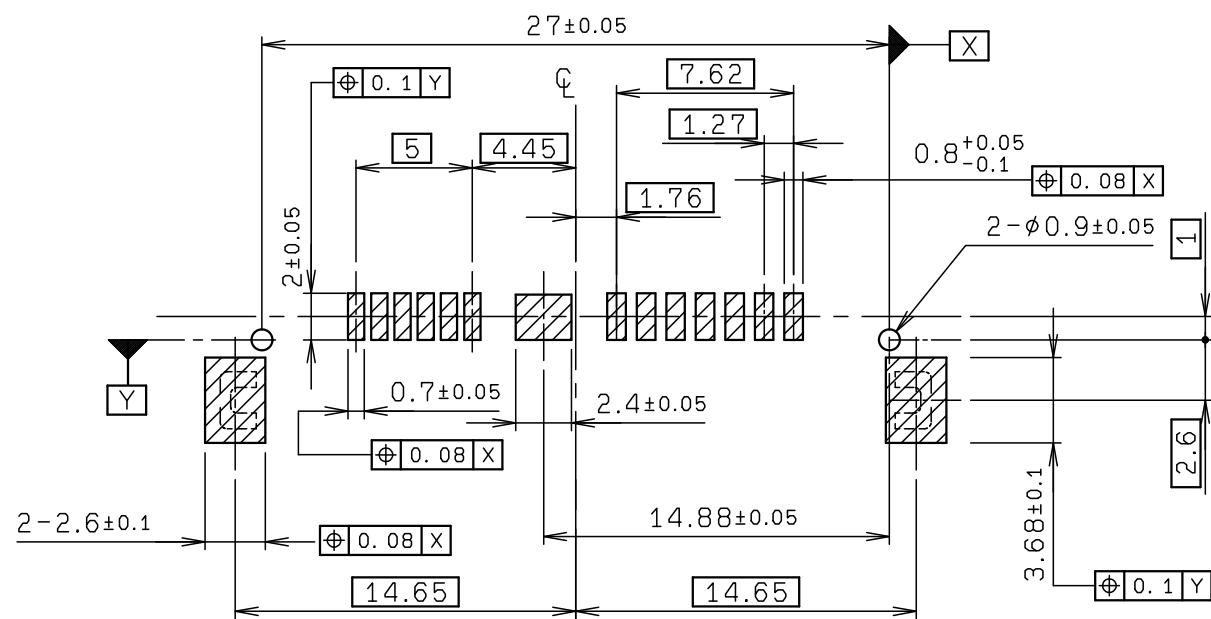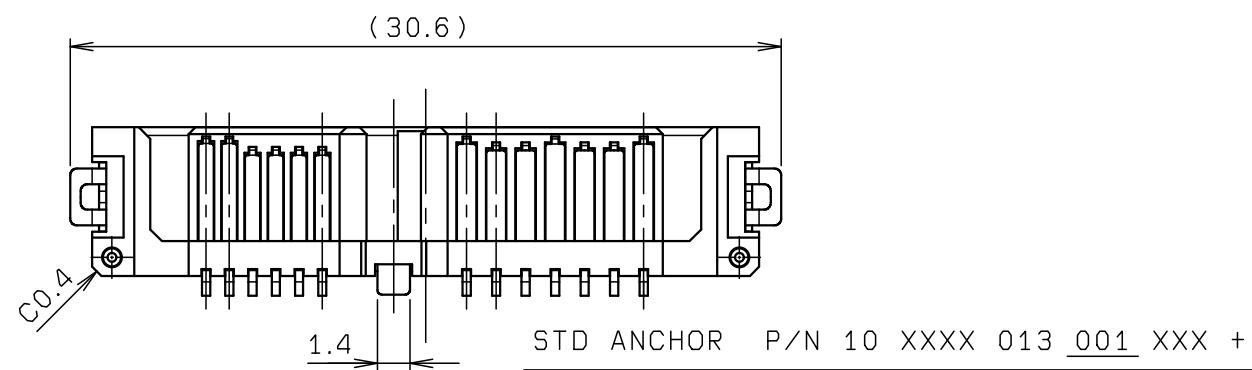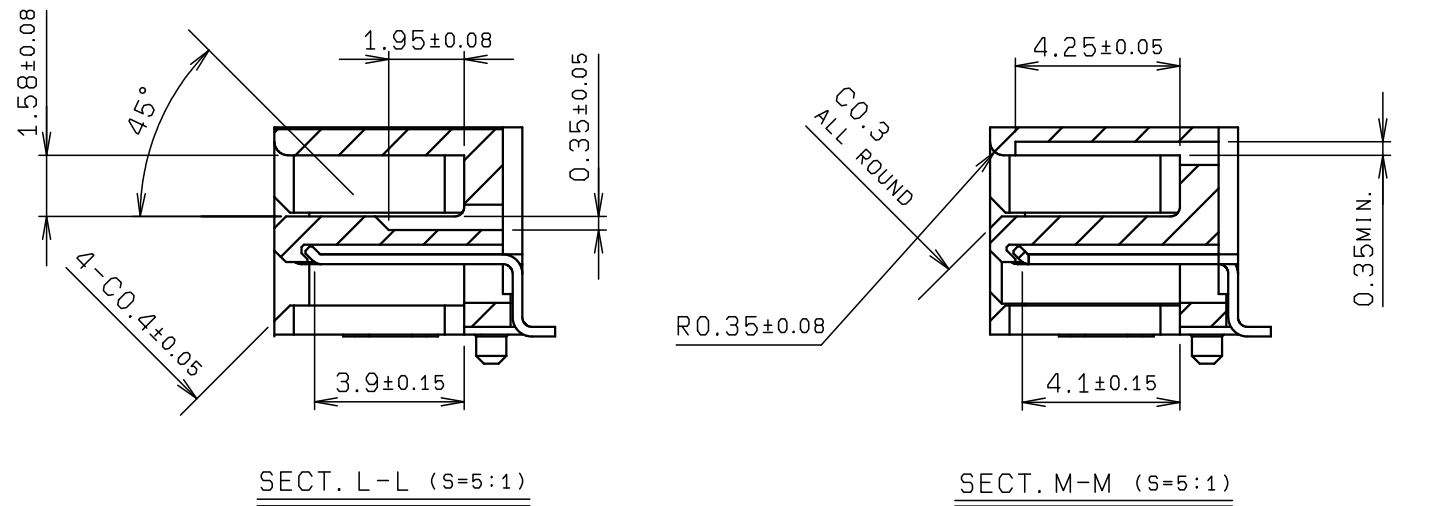


RECOMMENDED PCB LAYOUT
FOR STD ANCHOR

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
-----	-------------	----------	-----	----------	---------	---------


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

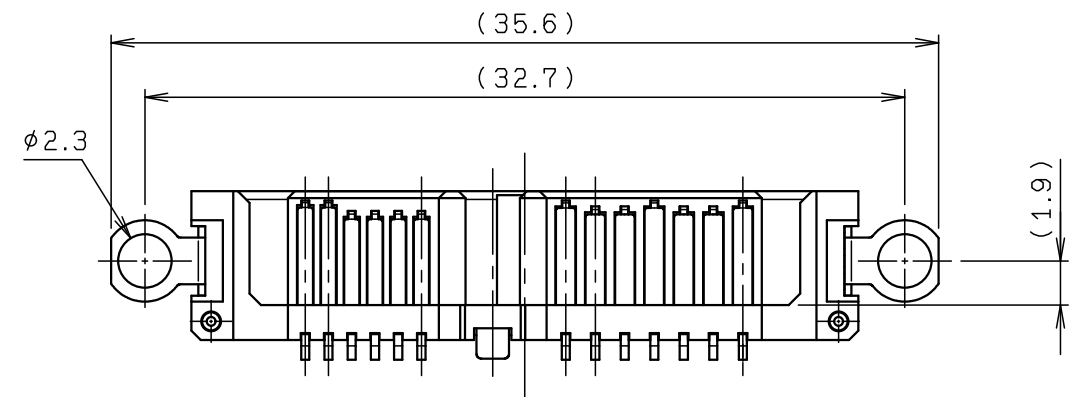

ANCHOR VARIATION P/N 10 XXXX 013 002 XXX +

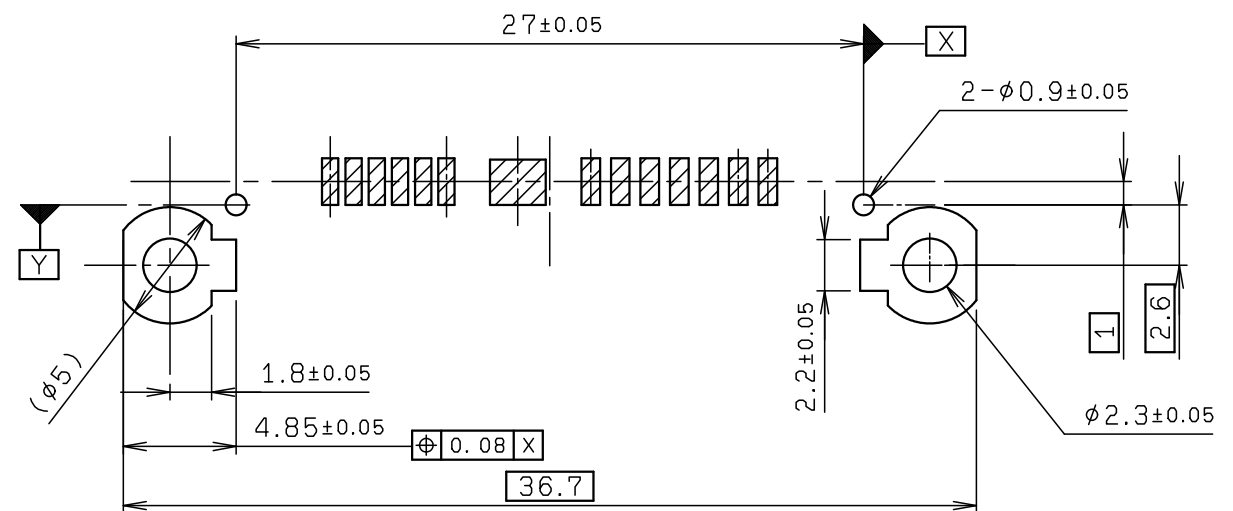


TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2		UNIT mm		ANGLE 3RD		REFER TO SHEET 1/4			
10 ≤ X < 30 ±0.25		SCALE 3 : 1		DATE 2007/03/20		NO.	EDN/DCN	DATE	ISSUE
30 ≤ X ±0.3		ANGLE / 角度 ±3°		DRAWN M. YOSHIDA		DESIGNED M. YOSHIDA		CHECKED T. MORI	
PART NAME / 品名		PART NO. / 型番		DWG NO. / 図番		SHEET / REV		APPROVED	
SERIES 5650 S-ATA PLUG ASSY RA SMT 13P WITH CENTER ANCHOR		14 5650 013 00X XXX +		BJS 5650003		2 / 4			

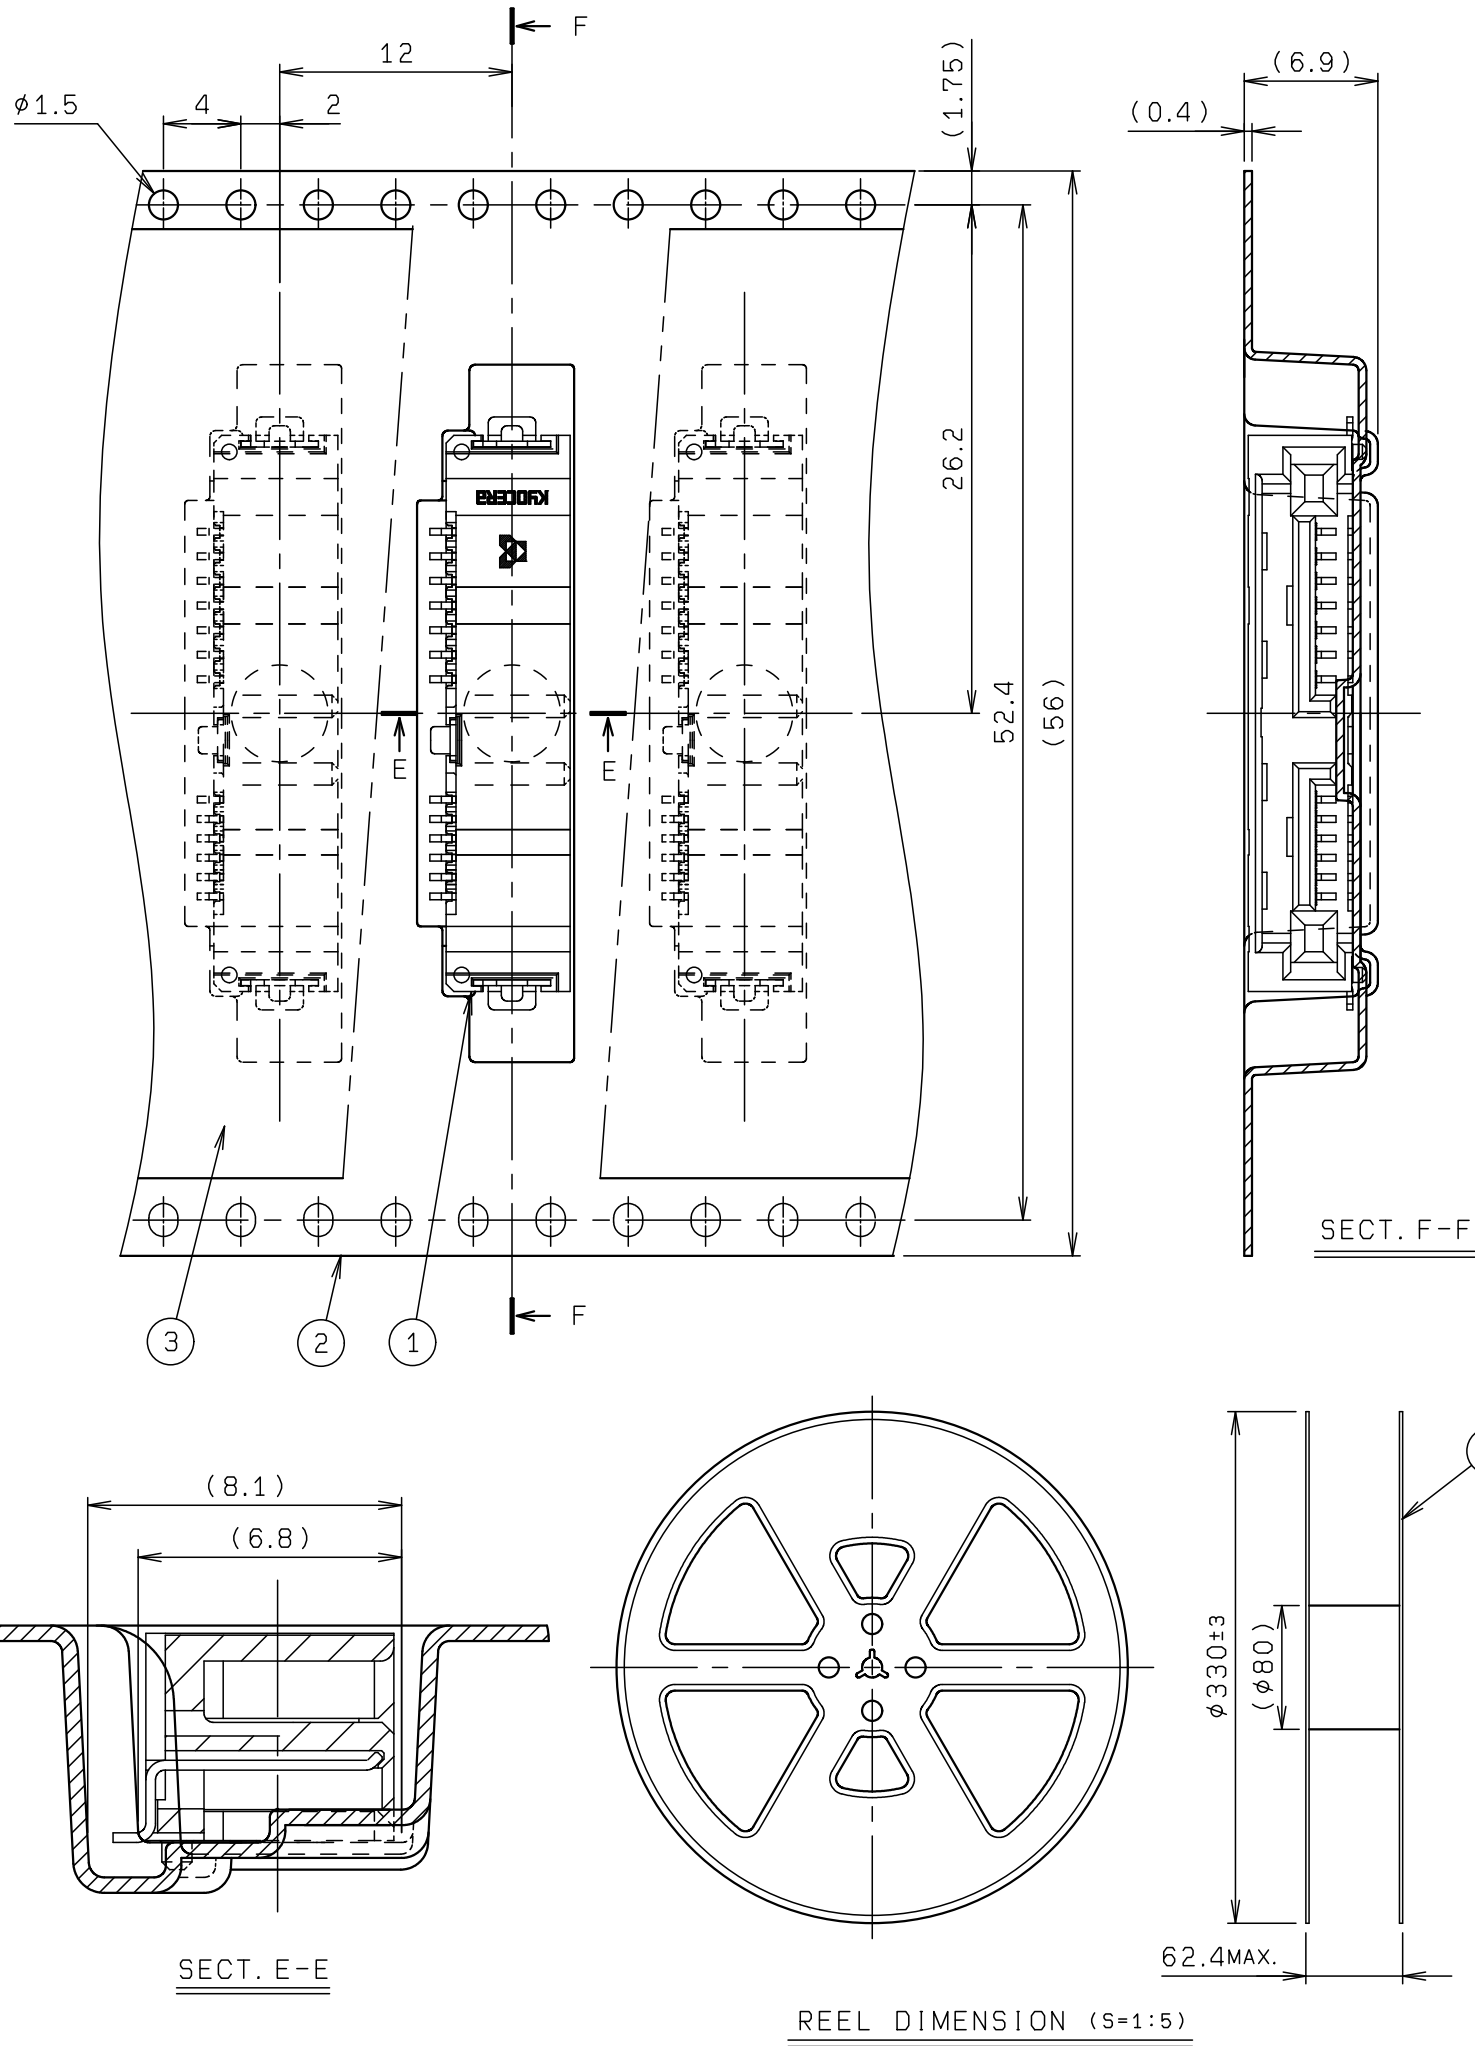


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	14 5650 013 00X XXX +	500			10 5650 013 00X XXX +
2	EMBOSSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

注 記
NOTE

1. 梱包数量 : 500 個/リール
PACKING QUANTITY : 500 ea/reel
2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

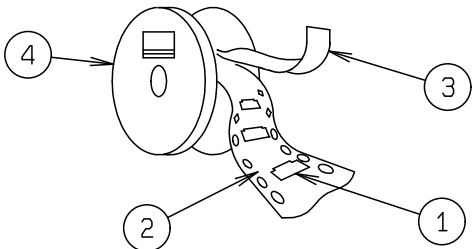

3. 引出し方向
USER DIRECTION OF FEED

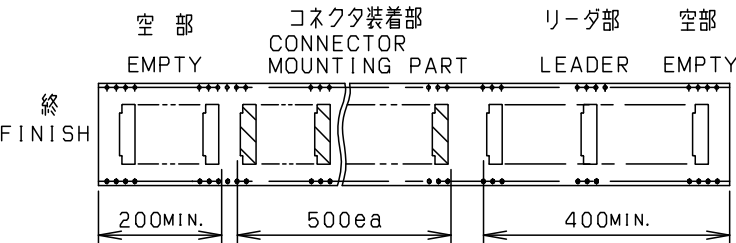

引出し方向
USER DIRECTION OF FEED

4. 型番
P/N

10 5650 013 00X XXX +

極 数

NO. OF POS.

013: 13P

バリエーション

VARIATION

1: STD TYPE WITH CENTER ANCHER

めっき

PLATING

829 : 全体下地 : Ni UNDER 2~4 μ m MIN.

: Au 0.1 μ m MIN. (ZONE-A)

868 : 全体下地 : Ni UNDER 2~4 μ m MIN.

: Au 0.1 μ m MIN. (ZONE-A) + 禁制帯仕様 (Ni BARRIER)

896 : 全体下地 : Ni UNDER 2~4 μ m MIN.




: Au 0.05 μ m MIN. (ZONE-A) + 禁制帯仕様 (Ni BARRIER)

※この注記の1~3は3ページ目にも適用


※THIS NOTES 1 TO 3 ARE APPLICABLE TO
SHEET-3 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2 10≤ X <30 ±0.25 30≤ X ±0.3	UNIT mm		ANGLE 3RD	REFER TO SHEET 1/4					
				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
				PART NAME / 品名 EMBOSS TAPE ASSY S-ATA 13P PLUG STD CONNECTOR					
ANGLE / 角度 ±3°		SCALE N1S	DATE 2007/05/15						
DRAWN M. TAKAHASHI	DESIGNED M. YOSHIDA	CHECKED	APPROVED T. MORI	PART NO. / 型番 14 5650 013 00X XXX +					
DWG NO. / 図番 BJS 5650003				SHEET/REV 3/4			D		
KYOCERA									

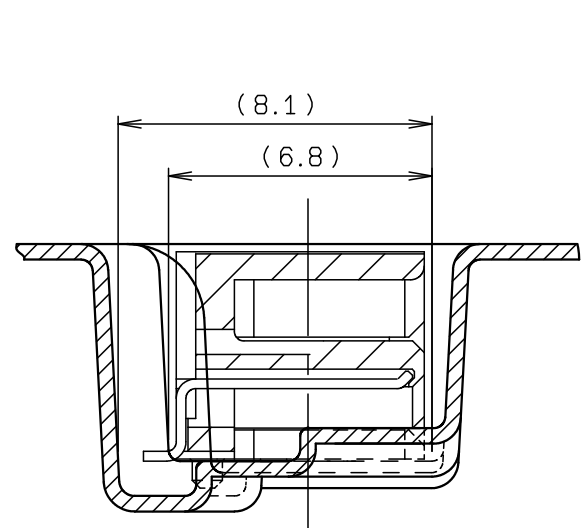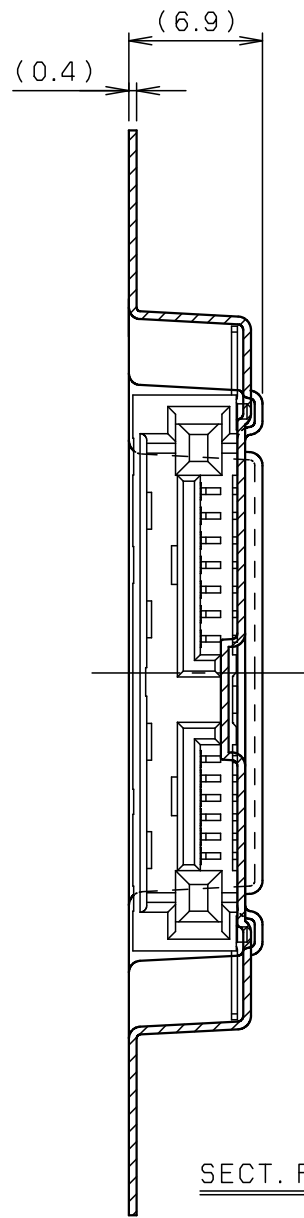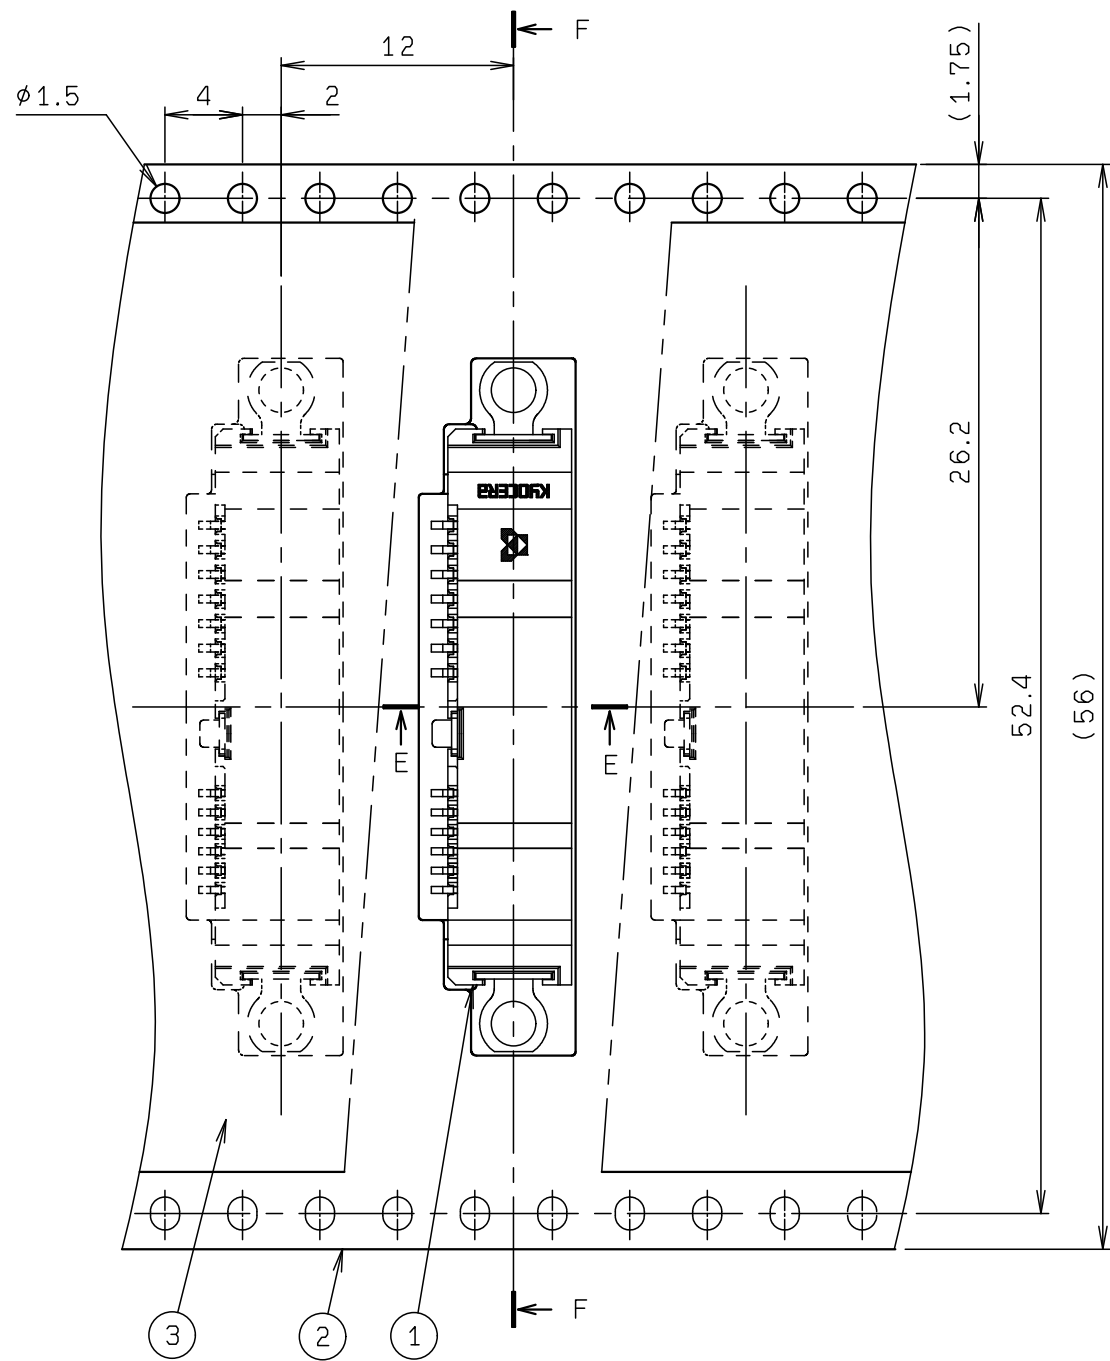

SECT. E-E

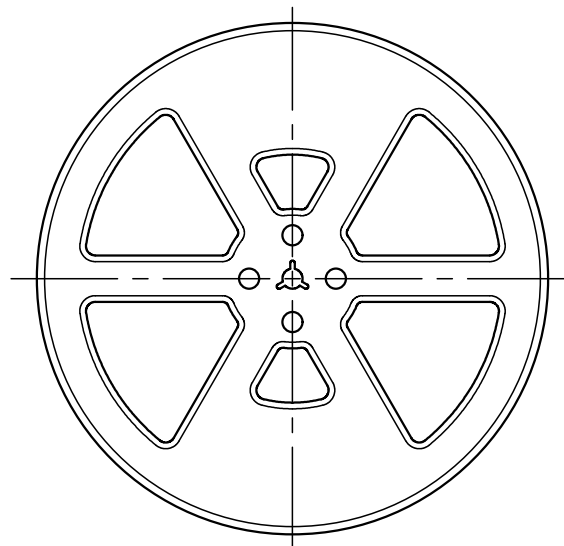

REEL DIMENSION (S=1:5)

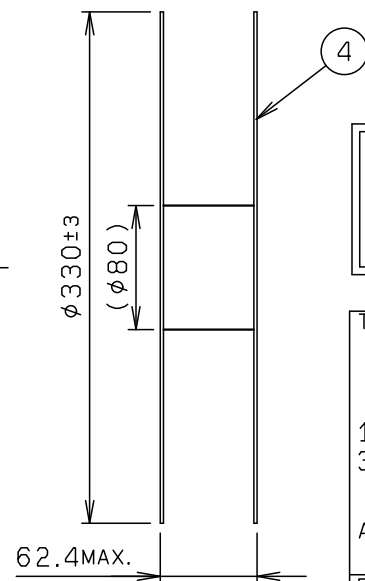


SECT. F-F

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	14 5650 013 00X XXX +	500			10 5650 013 00X XXX +
2	EMBOSSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		


注 記
NOTE

1. 梱包数量 : 500 個/リール
PACKING QUANTITY : 500 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

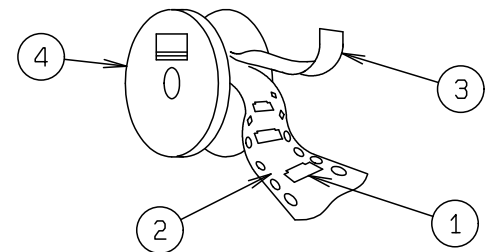

3. 引出し方向
USER DIRECTION OF FEED

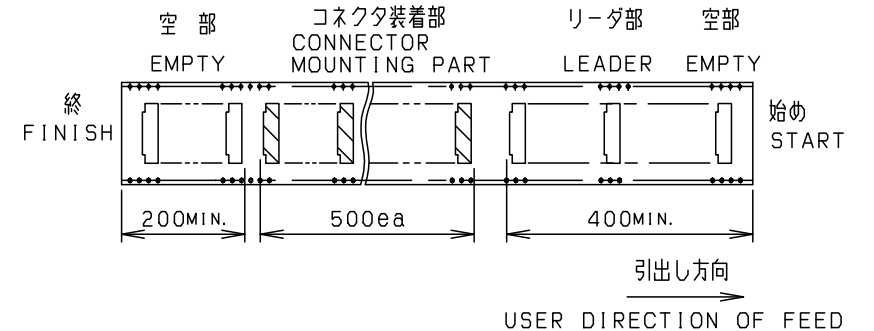

4. 型 番
P/N 10 5650 013 00X XXX +

極 数

NO. OF POS.

013: 13P

バリエーション

VARIATION

002: HOLE TYPE ANCHER

めっき

PLATING

829 : 全体下地 : Ni UNDER 2~4 μ m MIN.

: Au 0.1 μ m MIN. (ZONE-A)

868 : 全体下地 : Ni UNDER2~4 μ m MIN.

: Au 0.1 μ m MIN. (ZONE-A)+禁制帯仕様(Ni BARRIER)

896 : 全体下地 : Ni UNDER2~4 μ m MIN.

: Au 0.05 μ m MIN. (ZONE-A)+禁制帯仕様(Ni BARRIER)

※この注記の1~3は4ページ目2のみ適用

※THIS NOTES 1 TO 3 ARE APPLICABLE TO
SHEET-4 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S)			PRODUCT SPEC / 製品規格								
X <10 ±0.2 10≦ X <30 ±0.25 30≦ X ±0.3	UNIT		ANGLE		REFER		TO SHEET		1/4		
	mm		3RD		NO.		EDN/DCN		DATE	ISSUE	
	SCALE		DATE		PART NAME / 品名						
	NTS		2007/05/15		EMBOSS TAPE ASSY S-ATA 13P PLUG STD CONNECTOR						
ANGLE / 角度 ±3°											
DRAWN	DESIGNED	CHECKED	APPROVED	PART NO. / 型番							
M. TAKAHASHI	M. YOSHIDA		T. MORI	14 5650 013 00X XXX +							
				DWG NO. / 図番						SHEET/REV	
				BJS 5650003						14/4 D	

KYOCERA