





ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

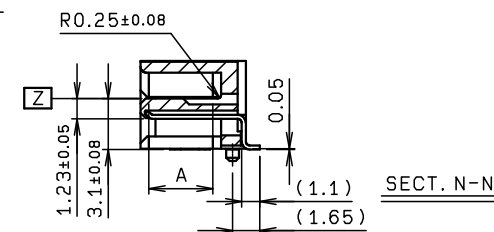


*THIS NOTES 1 ARE APPLICABLE TO SHEET-1 ONLY.





TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
$X < 10 \pm 0.2$ $10 \leq X < 30 \pm 0.25$ $30 \leq X \pm 0.3$		UNIT mm		ANGLE 3RD		A DCN20656 2020/06/30 K. YOSHIDA O EDN-378 2011/05/18 M. YOSHIDA		F. IKEGAMI T. MORI	
ANGLE / 角度 $\pm 3^\circ$		SCALE 3 : 1		DATE 2011/05/18		NO. EDN/DCN DATE ISSUE		CHECKED APPROVED	
DRAWN M. YOSHIDA		DESIGNED M. YOSHIDA		CHECKED T. MORI		PART NAME / 品名 SERIES 5650 S-ATA PLUG ASSY RA SMT 13P WITH CENTER ANCHOR			
						PART NO. / 型番 15 5650 013 002 XXX +			
DWG NO. / 図番 BJS 5650018						SHEET/REV 1/3 A			

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
-----	-------------	----------	-----	----------	---------	---------


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

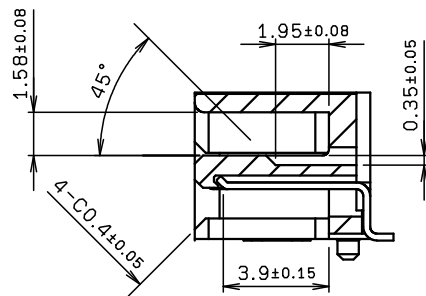


SECT. L-L (S=5:1)

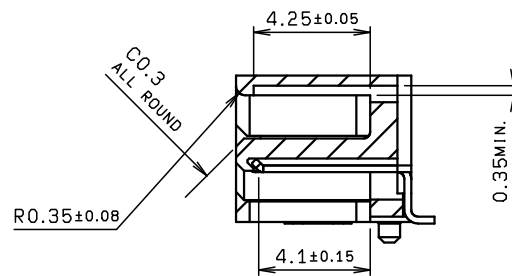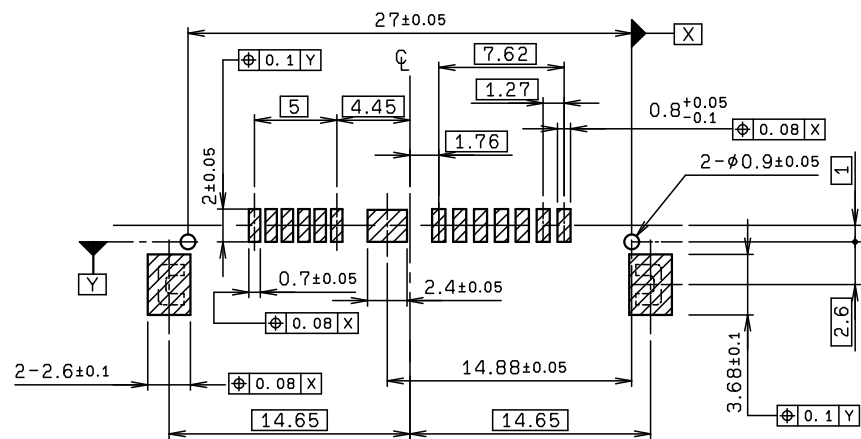SECT. M-M (S=5:1)



RECOMMENDED PCB LAYOUT
FOR STD ANCHOR

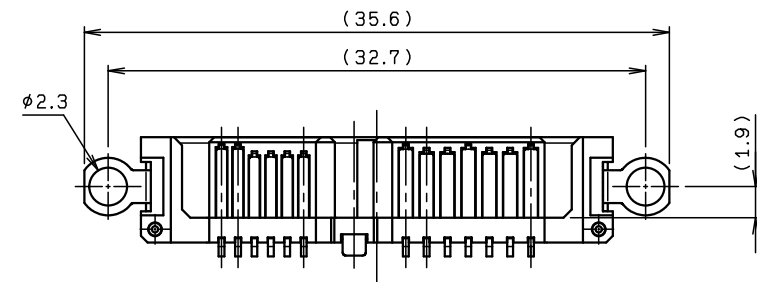


ANCHOR VARIATION P/N 10 XXXX 013 002 XXX +

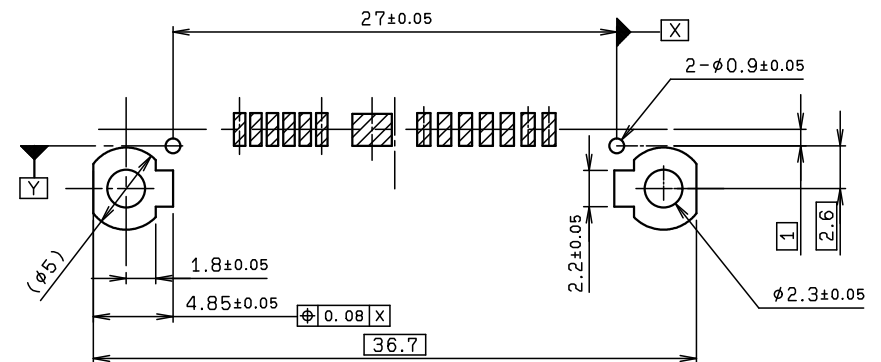

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2 10≤ X <30 ±0.25 30≤ X ±0.3		UNIT		ANGLE		REFER TO SHEET		1/3	
		mm		3RD					
ANGLE / 角度 ±3°		SCALE		DATE		NO. EDN/DCN		DATE	ISSUE
		3 : 1		2011/05/18		PART NAME / 品名		SERIES 5650 S-ATA PLUG ASSY RA SMT 13P WITH CENTER ANCHOR	
DRAWN M. YOSHIDA		DESIGNED M. YOSHIDA		CHECKED		APPROVED T. MORI		PART NO. / 型番 15 5650 013 002 XXX +	
						DWG NO. / 図番 BJS 5650018			SHEET/REV 2/3 A

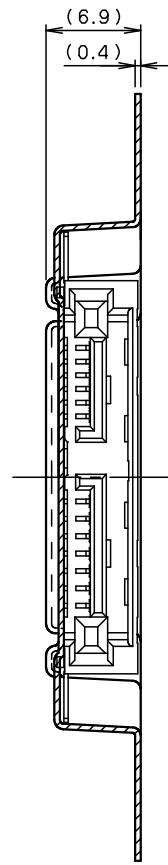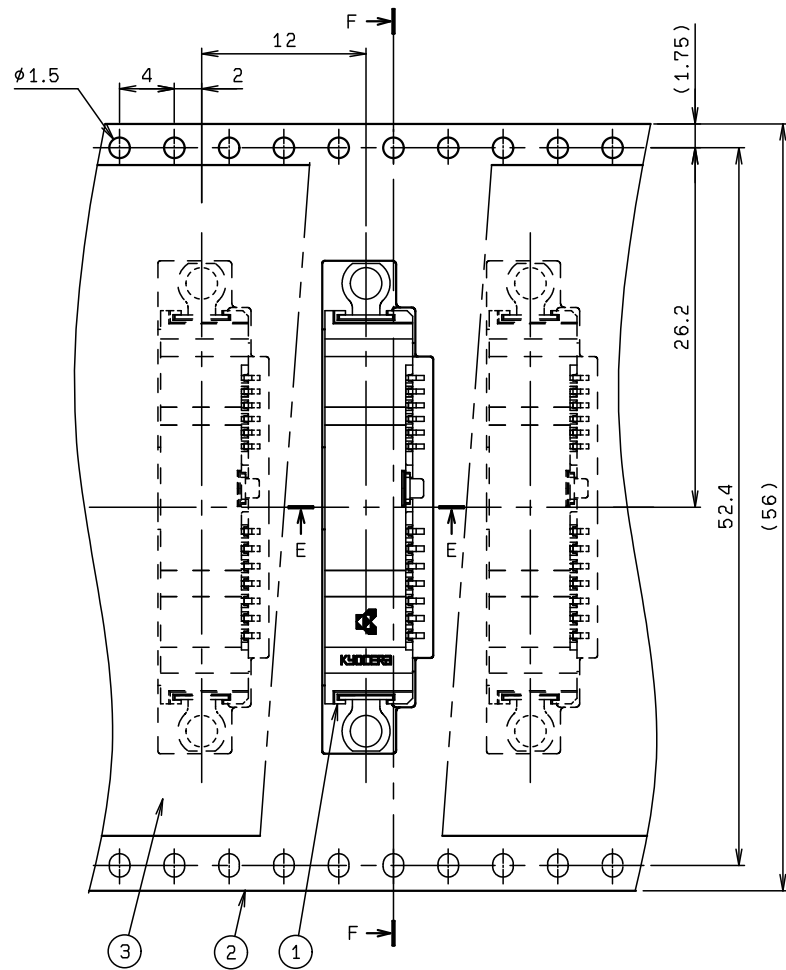

SECT. F-F

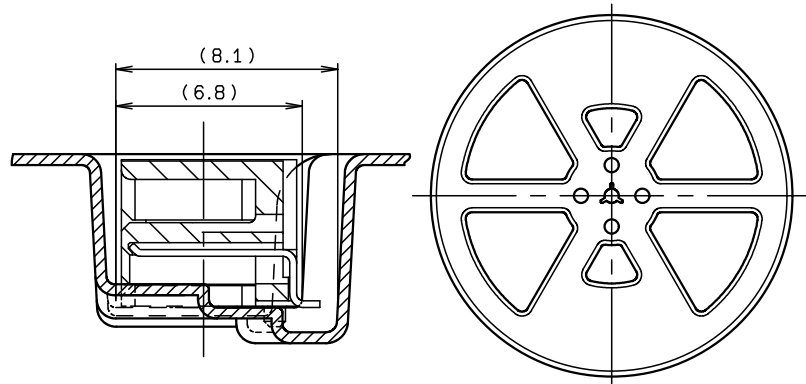

SECT. E-E


REEL DIMENSION (S=1:5)

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	15 5650 013 002 XXX +	500			10 5650 013 002 XXX +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

注 記
NOTE


1. 梱包数量 : 500 個/リール
PACKING QUANTITY : 500 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

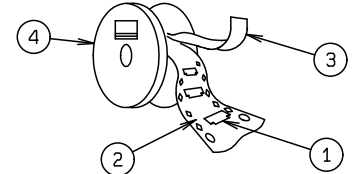

3. 引出し方向

USER DIRECTION OF FEED

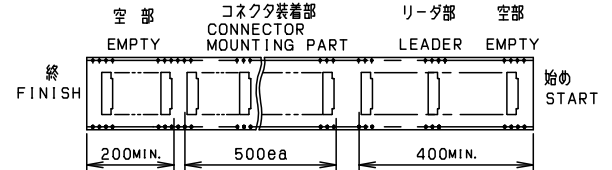

4. 型番
P/N

15 5650 013 002 XXX +

極数

NO. OF POS.

013: 13P

バリエーション

VARIATION

002: HOLE TYPE ANCHER

めっき

PLATING

829 : 全体下地 : Ni UNDER 2~4 μ m MIN.

: Au 0.1 μ m MIN. (ZONE-A)

868 : 全体下地 : Ni UNDER 2~4 μ m MIN.

: Au 0.1 μ m MIN. (ZONE-A)+禁制帯仕様(Ni BARRIER)

896 : 全体下地 : Ni UNDER 2~4 μ m MIN.

: Au 0.05 μ m MIN. (ZONE-A)+禁制帯仕様(Ni BARRIER)

※この注記の1~3は3ページ目にのみ適用

※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-3 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X < 10 ± 0.2		UNIT		ANGLE		REFER TO SHEET		1/3	
10 $\leq$ X < 30 ± 0.25		mm		3RD		NO.		EDN/DCN	
30 $\leq$ X ± 0.3		SCALE		DATE		DATE		ISSUE	
ANGLE / 角度 $\pm 3^\circ$		NTS		2011/05/18		PART NAME / 品名		CHECKED	
DRAWN		DESIGNED		CHECKED		APPROVED		PART NO. / 型番	
M. TAKAHASHI		M. YOSHIDA		T. MORI		15 5650 013 002 XXX +		DWG NO. / 図番	
						BJS 5650018		SHEET/REV	
								3/3 A	

KYOCERA

SHEET/REV

3/3 A