


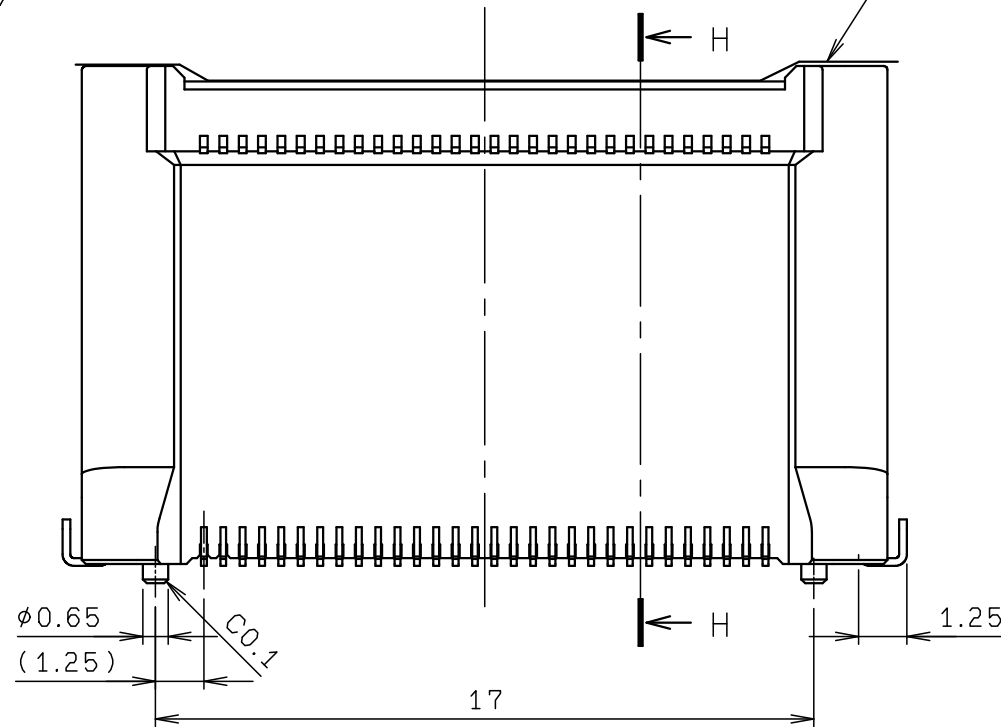
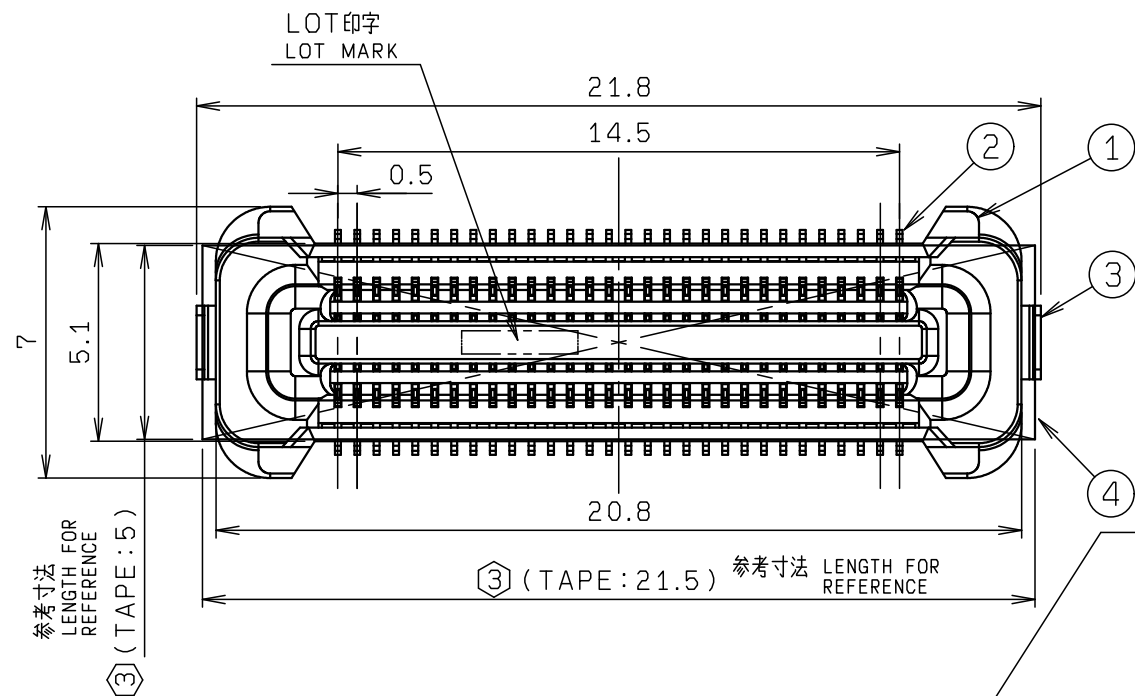
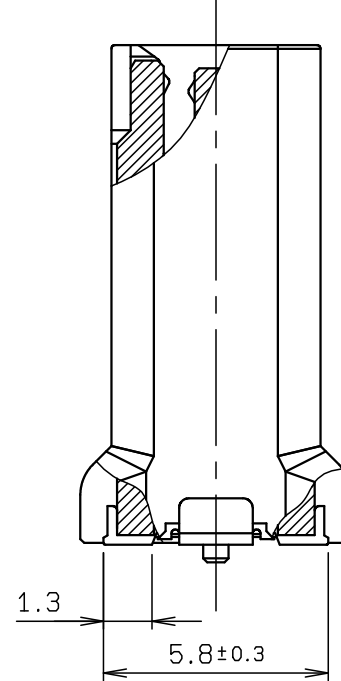


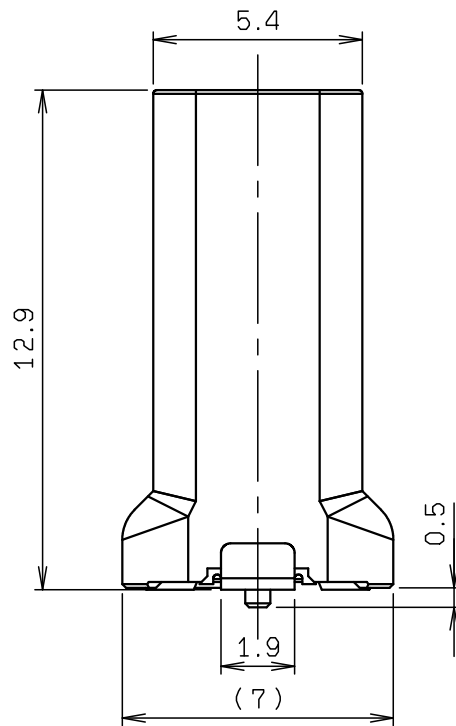

TAPEは、嵌合面の凹凸により隙間が生じる場合があります。
A CLEARANCE WILL BE MADE BETWEEN VACUUM TAPE AND THE CONNECTOR BY THE LACK OF FLATNESS ON THE CONNECTOR TOP.

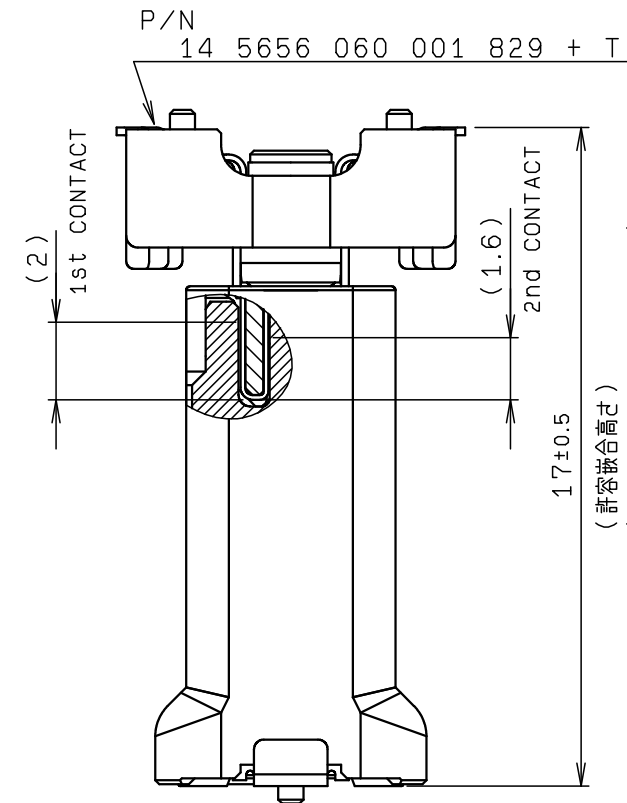

SECT. H-H

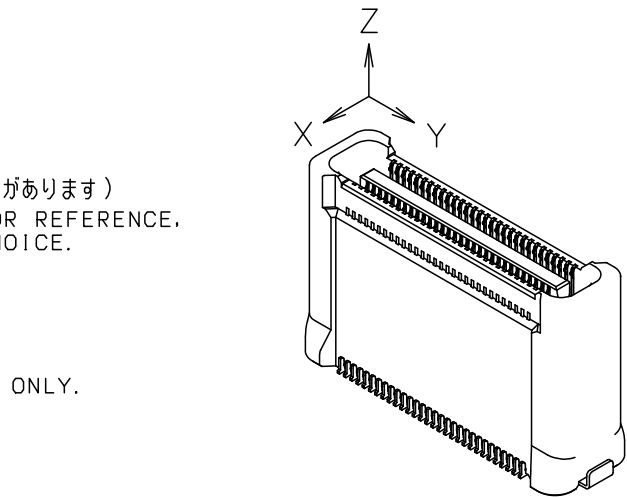

MATED CONDITION

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTANCE PLASTIC		COLOR: BLACK UL94V-0
2	CONTACT		60	COPPER ALLOY		t=0.15 AU PLATING
3	ANCHOR PLATE		2	BRASS		t=0.2 Sn-Cu PLATING
4	VACUUM TAPE		1	HEAT RESIST		

注 記
NOTE

- FLOATING構造はPLUG側
FLOATING STRUCTURE ON THE PLUG
- COPLANARITY 0.1 MAX.
- テープ長さ、巾寸法は参考寸法です。(予告なく変更の可能性があります)
WIDTH AND LENGTH OF THE TAPE ARE FOR REFERENCE, AND ARE SUBJECT TO CHANGE WITHOUT NOICE.
- 001:STD TYPE PLUG をご使用下さい。
USE THE STANDARD TYPE PLUG.

※この注記は1ページ目だけにのみ適用

※THIS NOTES ARE APPLICABLE TO SHEET-1 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		B	DCN22295	2022/05/25	Y. KITAMURA		M. YOSHIDA
X < 10 ±0.2				A	DCN-961	2017/10/02	M. YOSHIDA		Y. SHIMIZU
10 ≤ X < 30 ±0.25				O	EDN-407	2017/09/05	M. YOSHIDA		A. MIZUKOSHI
30 ≤ X ±0.3				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE 5 : 1		PART NAME / 品名					
		DATE 2017/09/05		REC BOARD TO BOARD ST SMT (+9) 0.5 PITCH CONNECTOR WITH GND CONTACT					
DRAWN M. YOSHIDA		DESIGNED M. YOSHIDA		CHECKED A. MIZUKOSHI		APPROVED		PART NO. / 型番	
								24 5656 060 009 829 + T	
								DWG NO. / 図番	
								BJS 5656008	
								SHEET/REV	
								1/2 B	



