


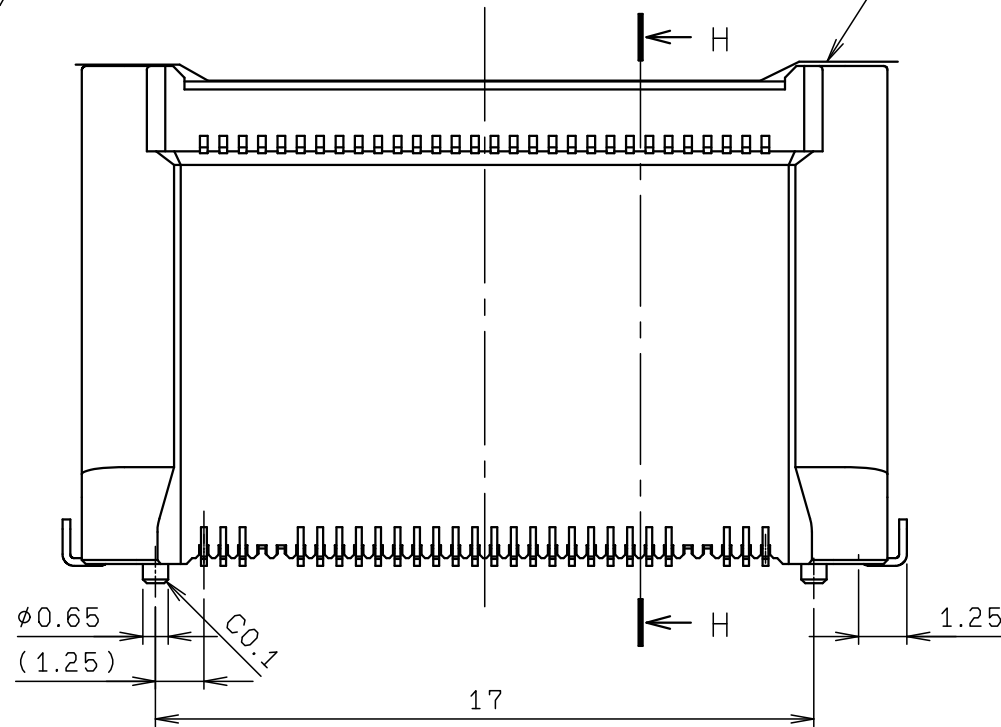
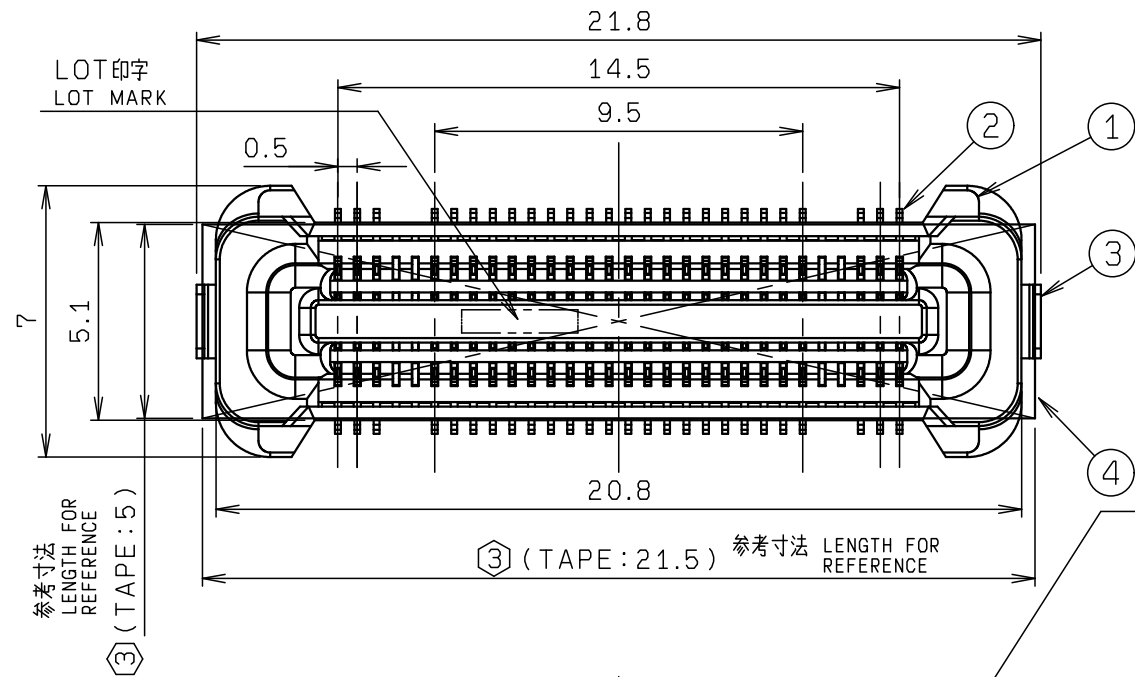


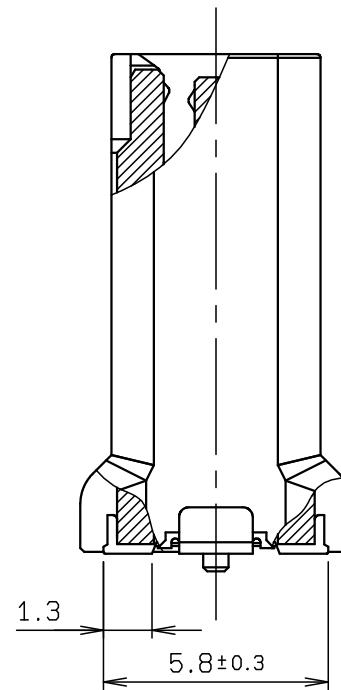

④ TAPEは、嵌合面の凹凸により隙間が生じる場合があります。
A CLEARANCE WILL BE MADE BETWEEN VACUUM TAPE AND THE CONNECTOR BY THE LACK OF FLATNESS ON THE CONNECTOR TOP.

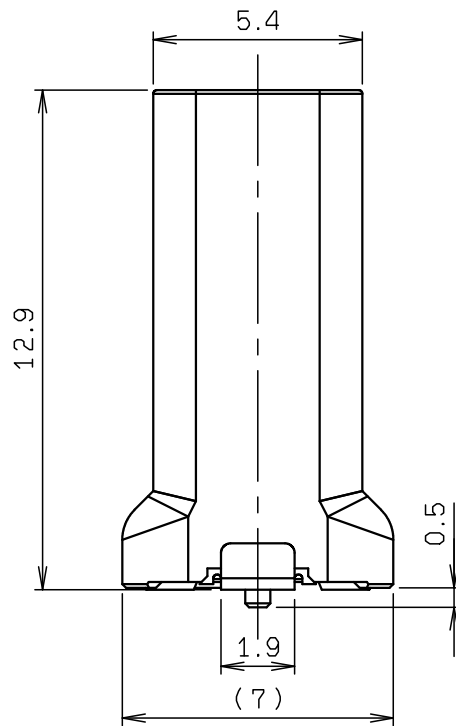

SECT. H-H

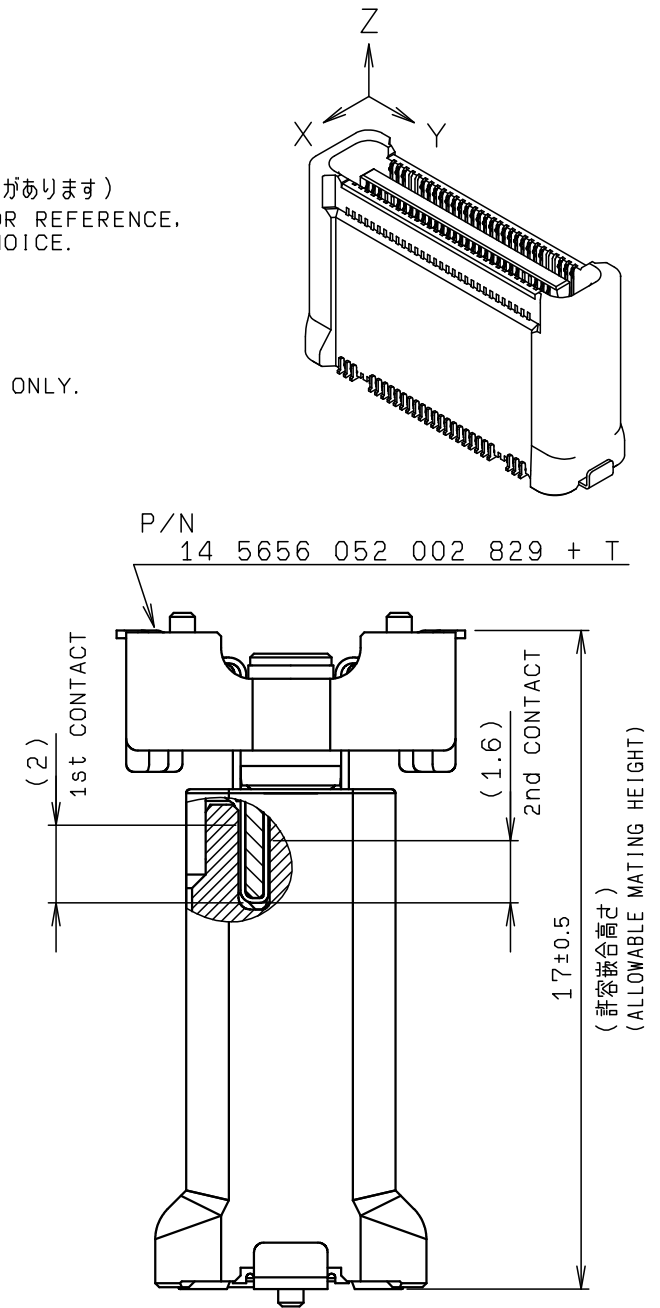

MATED CONDITION

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTANCE PLASTIC		COLOR: BLACK UL94V-0
2	CONTACT		52	COPPER ALLOY		t=0.15 AU PLATING
3	ANCHOR PLATE		2	BRASS		t=0.2 Sn-CU PLATING
4	VACUUM TAPE		1	HEAT RESIST		



注 記
NOTE

- FLOATING構造はPLUG側
FLOATING STRUCTURE ON THE PLUG
- COPLANARITY 0.1 MAX.
- ③ テープ長さ、巾寸法は参考寸法です。(予告なく変更の可能性があります)
WIDTH AND LENGTH OF THE TAPE ARE FOR REFERENCE, AND ARE SUBJECT TO CHANGE WITHOUT NOICE.
- 002:GND TYPE PLUG をご使用下さい。
USE THE GND TYPE PLUG.


※この注記は1ページ目だけに適用
※THIS NOTES ARE APPLICABLE TO SHEET-1 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


TOLERANCE / 一般公差(S) X <10 ±0.2 10≦ X <30 ±0.25 30≦ X ±0.3 ANGLE / 角度 ±3°		PRODUCT SPEC / 製品規格		C	DCN24480	2024/07/31	Y. KITAMURA		M. YOSHIDA
				B	DCN22295	2022/05/25	K. MIYAMOTO		M. YOSHIDA
				O	EDN20335	2020/12/01	K. MIYAMOTO		M. YOSHIDA
		UNIT	ANGLE	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
		mm	3RD	PART NAME / 品名					
SCALE 5 : 1		DATE 2020/12/01		REC BOARD TO BOARD ST SMT (+9)					
				0.5 PITCH CONNECTOR WITH GND CONTACT					
DRAWN M. TAKAHASHI	DESIGNED K. MIYAMOTO	CHECKED	APPROVED M. YOSHIDA	PART NO. / 型番 24 5656 552 009 829 + T					
				DWG NO. / 図番				SHEET/REV	
				BJS 5656017				1/2 C	

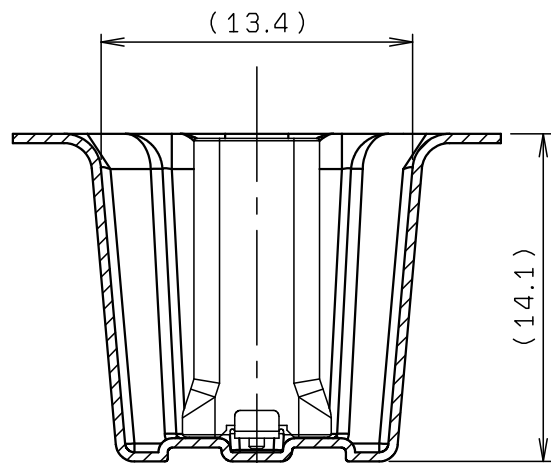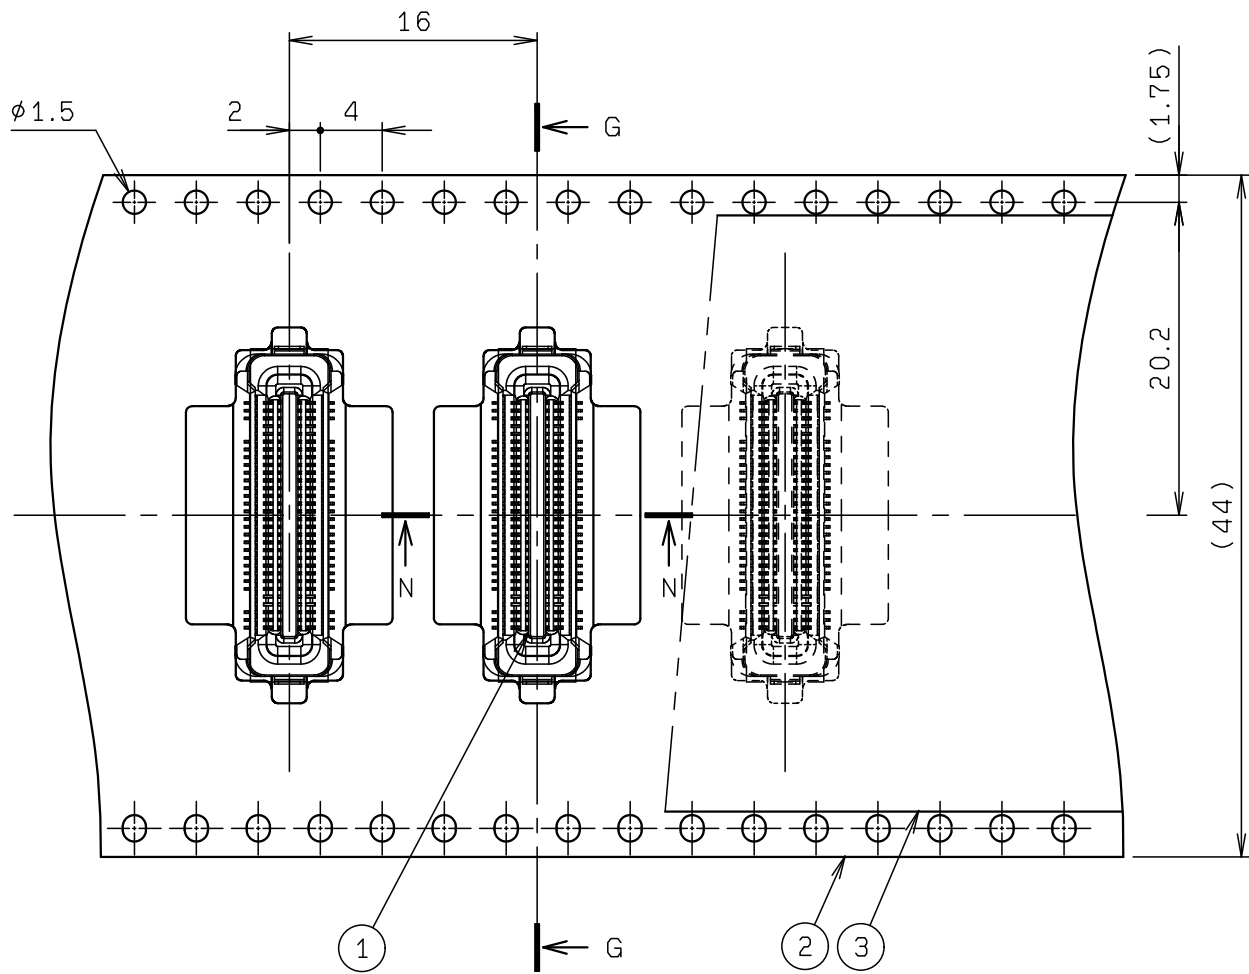


SECT. F-F
(S=3:1)

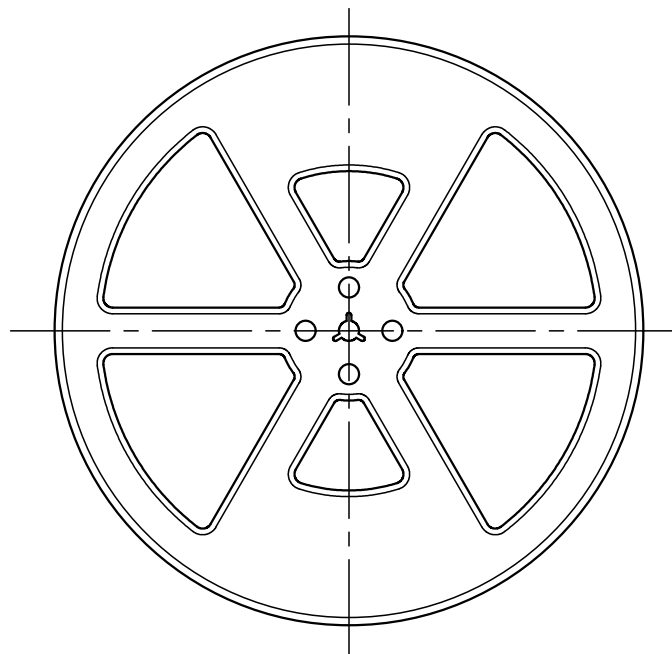

REEL DIMENSION (S=1:5)

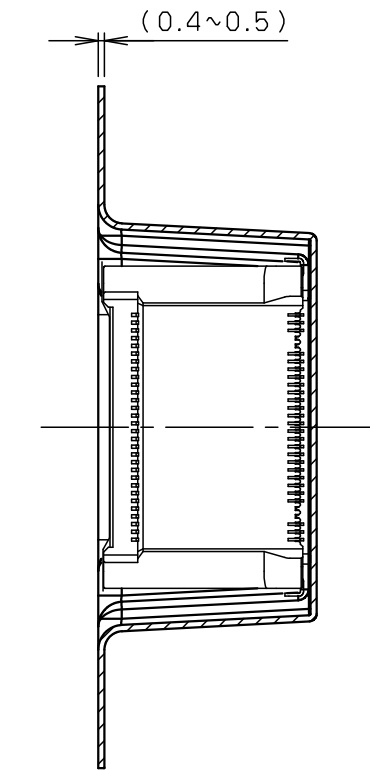

SECT. G-G

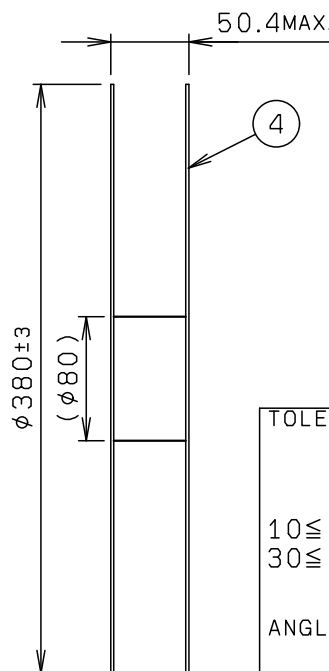


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	24 5656 552 009 829 + T	400			20 5656 552 009 829 + T
2	EMBOSSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	PET		
4	REEL		1	POLYSTYRENE		

注 記
NOTE


1. 梱包数量 : 400個/リール
PACKING QUANTITY : 400 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

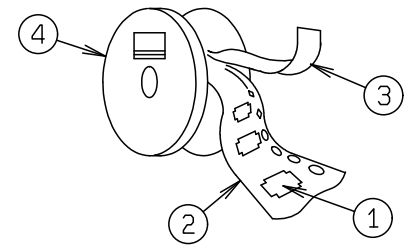

3. 引出し方向

USER DIRECTION OF FEED

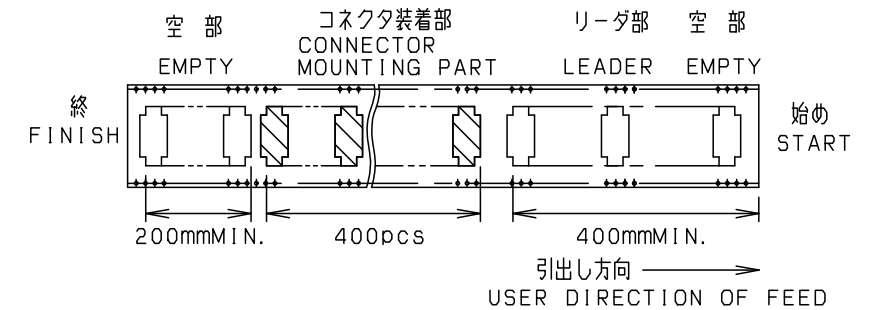

4. 型番
P/N

24 5656 552 009 829 + T

極数

NO OF POS.

552: 40P + GND 4P

(GND PIN is equivalent to 3 PIN. 3PX4=12P)
TOTAL 52P

バリエーション

VARIAION

009: WITH BOSS

(WITH VACUUM TAPE)

めっきコード

PLATING CODE

829: Ni UNDER COAT 1.5~6.0 μ m

CONTACT AREA Au 0.1 μ mMIN.

TAIL AREA Au 0.05 μ mMIN.

※この注記の1~3は2ページ目にも適用

※THESE NOTES 1 TO 3 ARE APPLICABLE TO SHEET-2 ONLY.

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ± 0.2									
10 $\leq$ X < 30 ± 0.25									
30 $\leq$ X ± 0.3									
ANGLE / 角度 $\pm 3^\circ$									
DRAWN M. TAKAHASHI		DESIGNED K. MIYAMOTO		CHECKED		APPROVED M. YOSHIDA		PART NO. / 型番 24 5656 552 009 829 + T	
								DWG NO. / 図番 BJS 5656017	
								SHEET / REV 12 / 2 C	

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

KYOCERA