
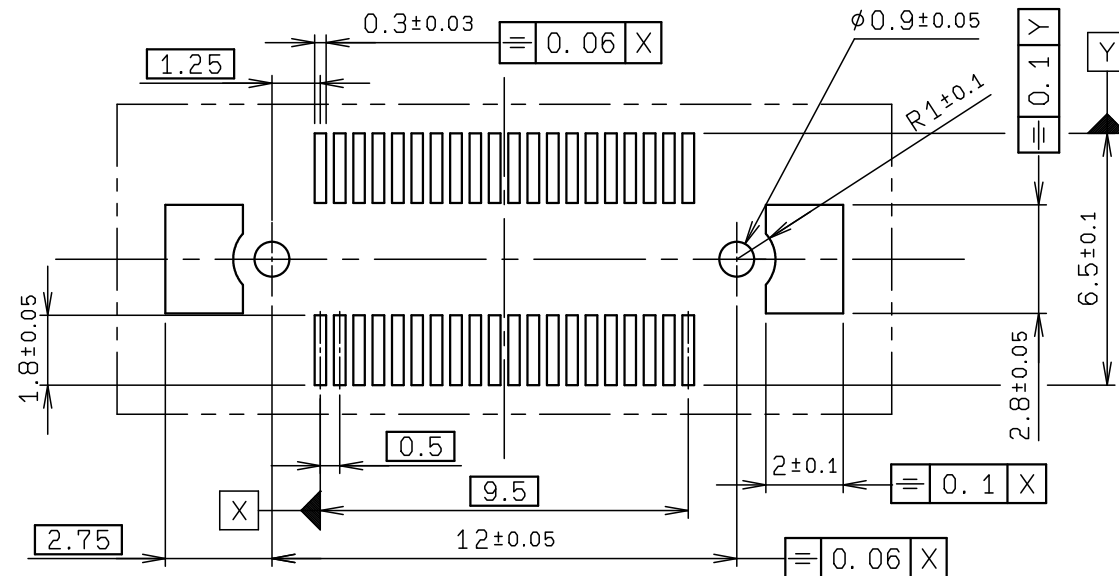
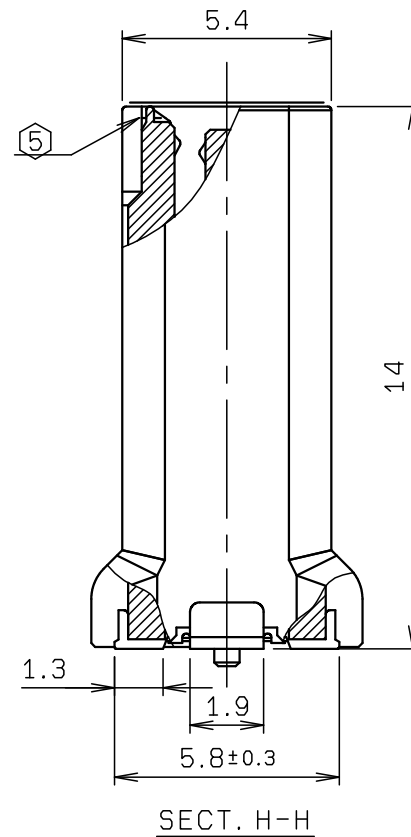
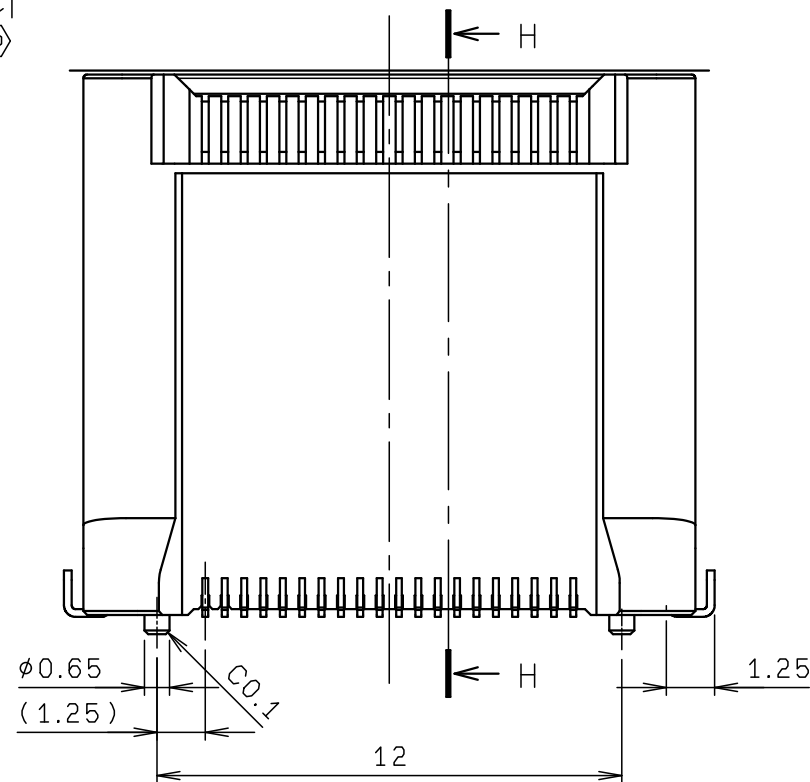



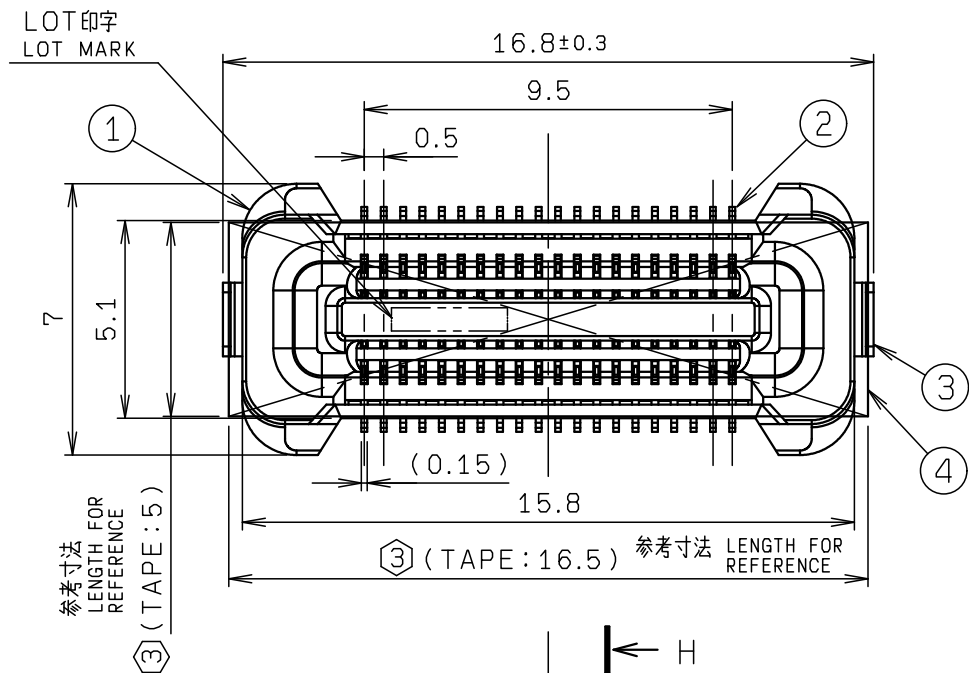


| NO. | DESCRIPTION  | PART NO. | QTY | MATERIAL                | DRW NO. | REMARKS                 |
|-----|--------------|----------|-----|-------------------------|---------|-------------------------|
| 1   | INSULATOR    |          | 1   | HEAT RESISTANCE PLASTIC |         | COLOR: BLACK<br>UL94V-0 |
| 2   | CONTACT      |          | 40  | COPPER ALLOY            |         | t=0.15<br>AU PLATING    |
| 3   | ANCHOR PLATE |          | 2   | BRASS                   |         | t=0.2<br>Sn-Cu PLATING  |
| 4   | VACUUM TAPE  |          | 1   | HEAT RESIST             |         |                         |

注 記  
NOTE

- FLOATING構造はPLUG側  
FLOATING STRUCTURE ON THE PLUG
- COPLANARITY 0.1 MAX.
- テープ長さ、巾寸法は参考寸法です。(予告なく変更の可能性があります)  
WIDTH AND LENGTH OF THE TAPE ARE FOR REFERENCE,  
AND ARE SUBJECT TO CHANGE WITHOUT NOTICE.
- 001 or 003:STD TYPE PLUG をご使用下さい。  
USE THE STANDARD TYPE PLUG.
- 異物入り込みを防ぐ形状ではありません。  
また、リブ形状はPLUGとの嵌合から柔軟性を持たせるため  
0.2mmの薄肉としています。そのため0.1mm程度の凹凸が生じても  
機能上問題ないことをご了承ください。  
THIS SHAPE DOES NOT PREVENT  
THE FOREIGN CONTAMINATION.  
BESIDES, THE SHAPE OF RIB IS THIN(0.2mm)  
FOR BEING FLEXIBLE WHEN MATING WITH PLUG.  
THEREFORE, THERE IS NO PROBLEM EVEN IF  
UNEVENNESS OF ABOUT 0.1mm OCCURS.



※この注記は1ページ目のみ適用  
※THIS NOTE IS APPLICABLE  
TO SHEET-1 ONLY.

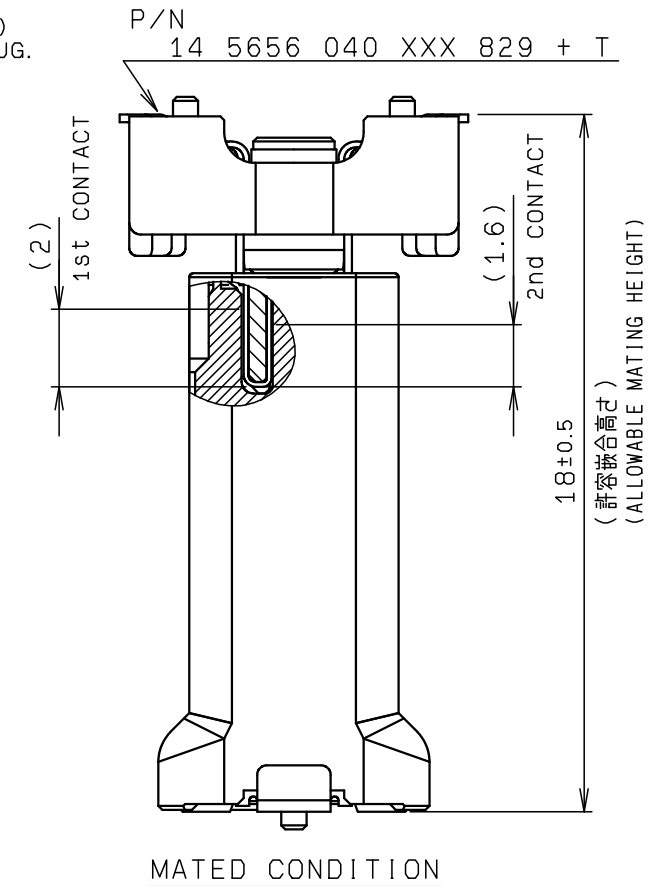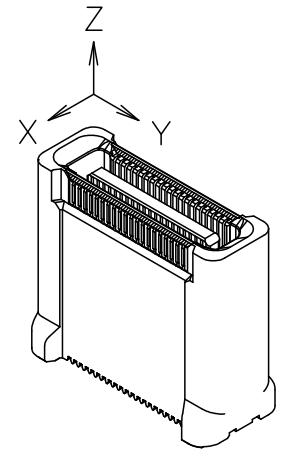


ROHS規制対応  
COMPLIANT WITH  
ROHS REGULATIONS

|                     |  |                     |  |                                 |          |            |             |         |            |
|---------------------|--|---------------------|--|---------------------------------|----------|------------|-------------|---------|------------|
| TOLERANCE / 一般公差(S) |  | PRODUCT SPEC / 製品規格 |  | B                               | DCN24319 | 2024/05/10 | Y. KITAMURA |         | M. YOSHIDA |
| X < 10 ±0.2         |  | UNIT                |  | A                               | DCN22295 | 2022/05/25 | Y. KITAMURA |         | M. YOSHIDA |
| 10 ≤ X < 30 ±0.25   |  | mm                  |  | O                               | EDN21121 | 2021/05/28 | K. MIYAMOTO |         | M. YOSHIDA |
| 30 ≤ X ±0.3         |  | ANGLE               |  | NO.                             | EDN/DCN  | DATE       | ISSUE       | CHECKED | APPROVED   |
| ANGLE / 角度          |  | 3RD                 |  | PART NAME / 品名                  |          |            |             |         |            |
| ±3°                 |  | SCALE               |  | REC BOARD TO BOARD ST SMT (+10) |          |            |             |         |            |
| 5 : 1               |  | DATE                |  | 0.5 PITCH CONNECTOR             |          |            |             |         |            |
| DRAWN               |  | DESIGNED            |  | PART NO. / 型番                   |          |            |             |         |            |
| M. TAKAHASHI        |  | K. MIYAMOTO         |  | 24 5656 040 010 829 + T         |          |            |             |         |            |
| CHECKED             |  | APPROVED            |  | DWG NO. / 図番                    |          |            |             |         |            |
|                     |  | M. YOSHIDA          |  | BJS 5656018                     |          |            |             |         |            |
|                     |  |                     |  | SHEET/REV                       |          |            |             |         |            |
|                     |  |                     |  | 1 / 2 B                         |          |            |             |         |            |


RoHS規制対応  
COMPLIANT WITH  
ROHS REGULATIONS

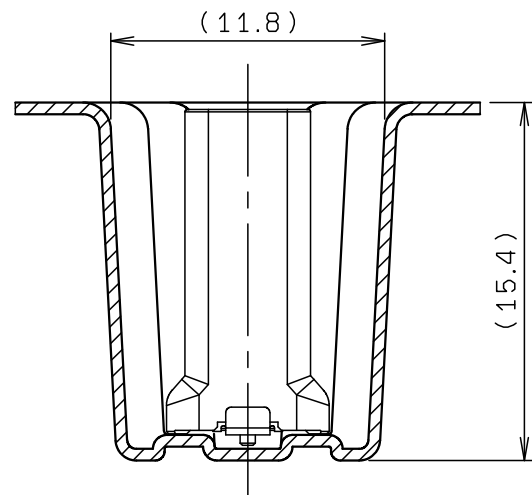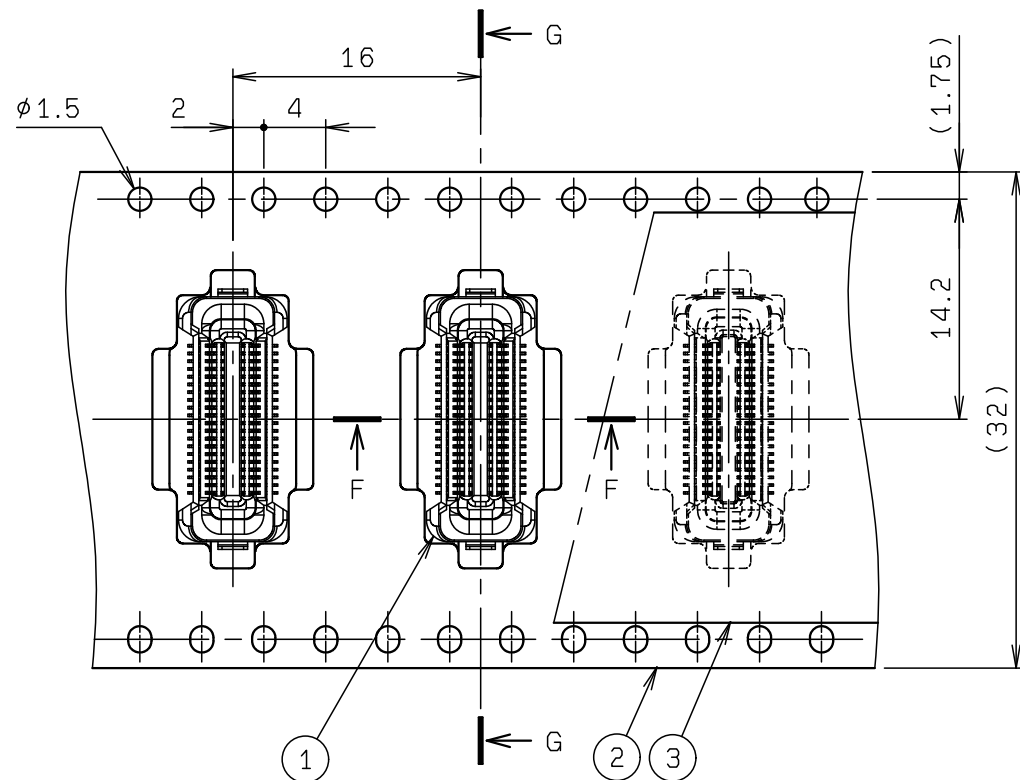

SECT. F-F  
(S=3:1)

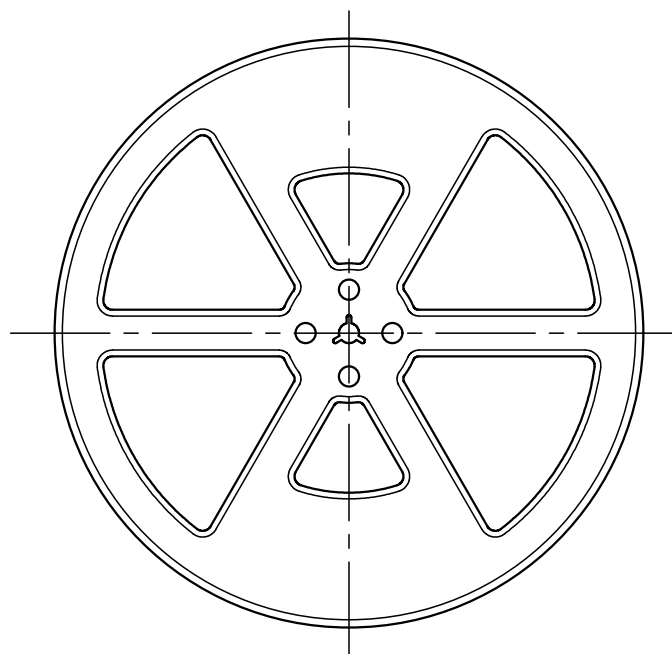

REEL DIMENSION (S=1:5)

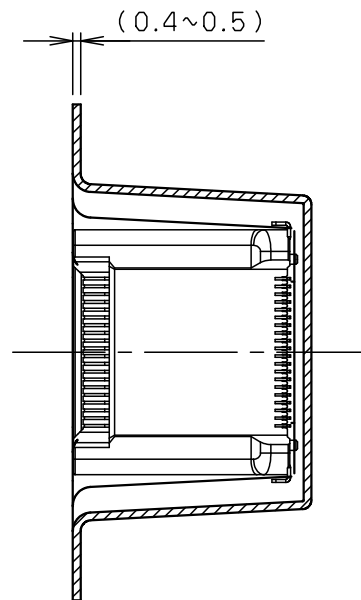


SECT. G-G

| NO. | DESCRIPTION    | PART NO.                | QTY | MATERIAL    | DRW NO. | REMARKS                 |
|-----|----------------|-------------------------|-----|-------------|---------|-------------------------|
| 1   | CONNECTOR      | 24 5656 040 010 829 + T | 350 |             |         | 20 5656 040 010 829 + T |
| 2   | EMBOSSED TAPE  |                         | 1   | POLYSTYRENE |         |                         |
| 3   | TOP COVER TAPE |                         | 1   | PET         |         |                         |
| 4   | REEL           |                         | 1   | POLYSTYRENE |         |                         |


注 記  
NOTE

1. 梱包数量 : 350個/リール  
PACKING QUANTITY : 350 ea/reel

2. 納入時のリール巻き方向  
REELING DIRECTION  
IN DELIVERY

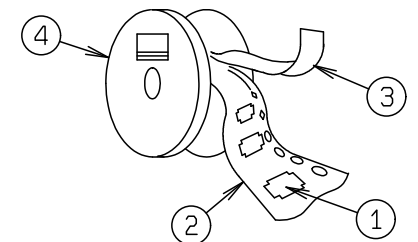

3. 引出し方向  
USER DIRECTION OF FEED

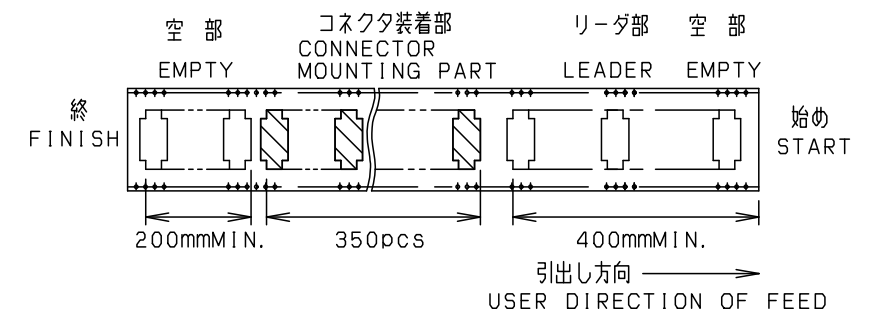

4. 型番  
P/N

24 5656 040 010 829 + T

極 数  
NO OF POS.  
040:40P

バリエーション  
VARIATION  
010:WITH BOSS (WITH VACUUM TAPE)

めっきコード  
PLATING CODE  
829: Ni UNDER COAT 1.0~6.0 $\mu$ m  
CONTACT AREA Au 0.1 $\mu$ m MIN.  
TAIL AREA Au 0.05 $\mu$ m MIN.

※この注記の1~3は2ページ目にも適用  
※THESE NOTES 1 TO 3 ARE APPLICABLE TO SHEET-2 ONLY.

|                                             |                                                                           |                     |                        |                                          |         |      |       |         |          |
|---------------------------------------------|---------------------------------------------------------------------------|---------------------|------------------------|------------------------------------------|---------|------|-------|---------|----------|
| TOLERANCE / 一般公差 (S)                        |                                                                           | PRODUCT SPEC / 製品規格 |                        |                                          |         |      |       |         |          |
| X <10 ±0.2<br>10≦ X <30 ±0.25<br>30≦ X ±0.3 | UNIT<br>mm                                                                |                     | ANGLE<br>3RD           | REFER TO SHEET 1/2                       |         |      |       |         |          |
|                                             |                                                                           |                     |                        | NO.                                      | EDN/DCN | DATE | ISSUE | CHECKED | APPROVED |
|                                             | PART NAME / 品名<br>REC BOARD TO BOARD ST SMT<br>H+10 0.5 PITCH EMBOSS ASSY |                     |                        |                                          |         |      |       |         |          |
| ANGLE / 角度<br>±3°                           |                                                                           | SCALE<br>2 : 1      | DATE<br>2021/05/28     |                                          |         |      |       |         |          |
| DRAWN<br>M. TAKAHASHI                       | DESIGNED<br>K. MIYAMOTO                                                   | CHECKED             | APPROVED<br>M. YOSHIDA | PART NO. / 型番<br>24 5656 040 010 829 + T |         |      |       |         |          |
| DWG NO. / 図番<br>BJS 5656018                 |                                                                           |                     |                        | SHEET/REV<br>2/2 B                       |         |      |       |         |          |
| KYOCERA                                     |                                                                           |                     |                        |                                          |         |      |       |         |          |