

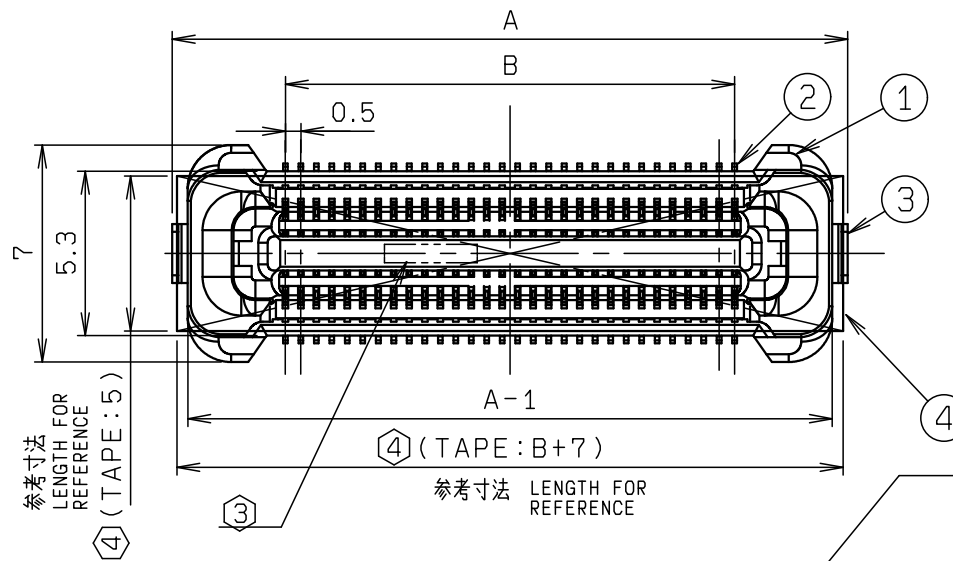
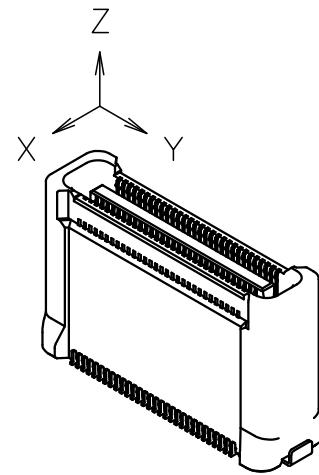
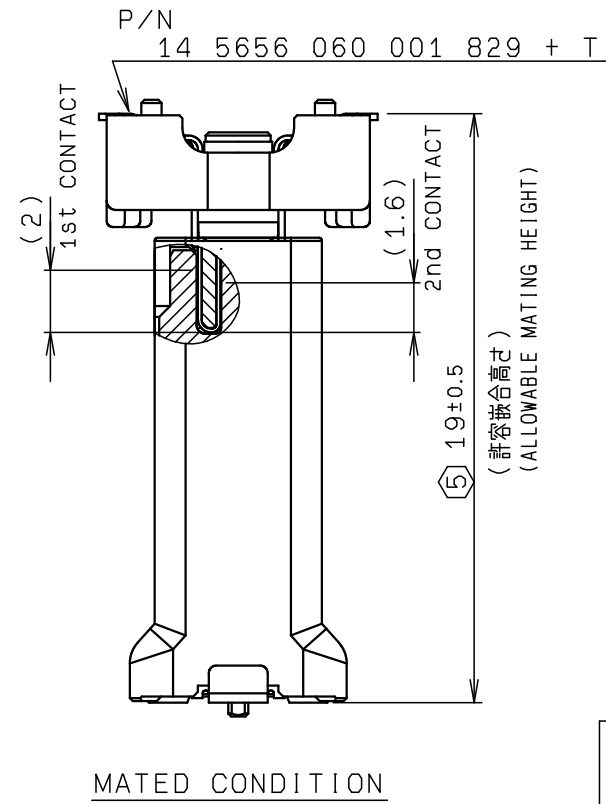
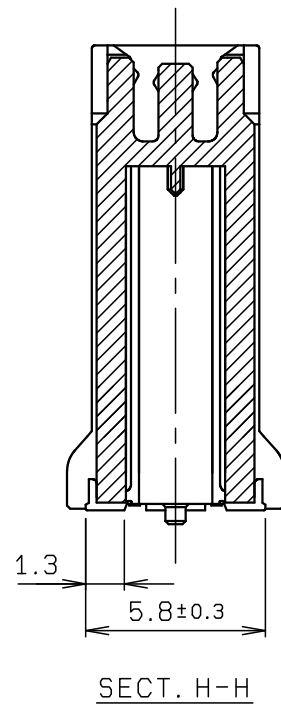


CONFIDENTIAL

Recommended PCB Layout

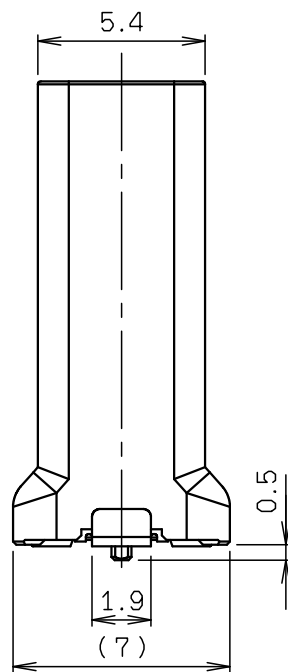

TAPEは、嵌合面の凹凸により隙間が生じる場合があります。
A CLEARANCE WILL BE MADE BETWEEN VACUUM TAPE AND THE CONNECTOR BY THE LACK OF FLATNESS ON THE CONNECTOR TOP.

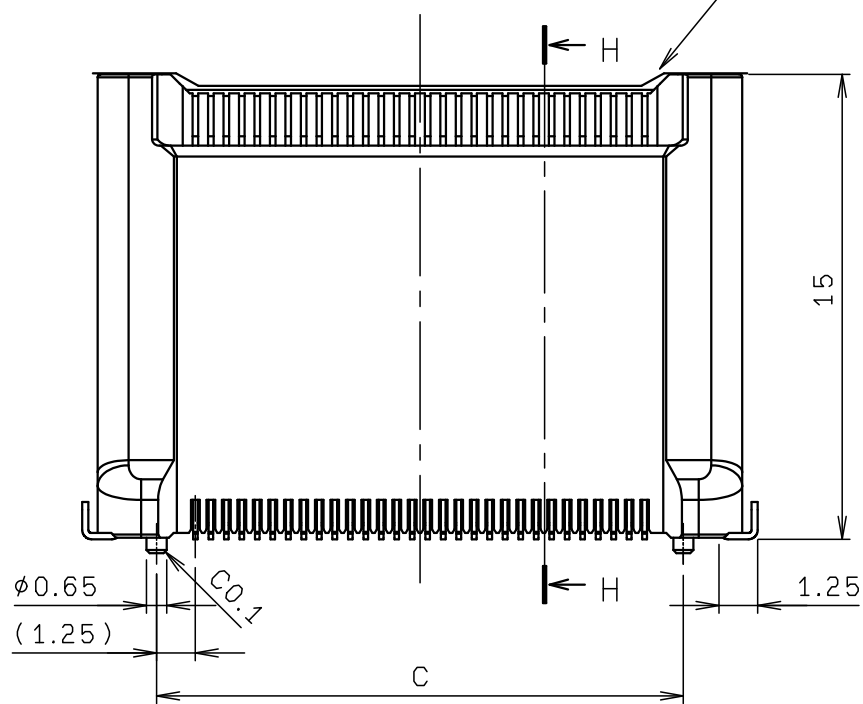

ROHS規制対応
COMPLIANT WITH
RoHS REGULATIONS

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTANCE PLASTIC		COLOR: BLACK UL94V-0
2	CONTACT		N	COPPER ALLOY		t=0.15 AU PLATING
3	ANCHOR PLATE		2	BRASS		t=0.2 Sn-Cu PLATING
4	VACUUM TAPE		1	HEAT RESIST		

極数 NO. OF POS.	A	B	C	D
60	21.8	14.5	17.0	22.5

※この表は1ページ目のみ適用
※THIS CHART IS APPLICABLE TO SHEET-1 ONLY.

- 注記
NOTE
- FLOATING構造はPLUG側
THE FLOATING STRUCTURE IS ON THE PLUG SIDE.
 - COPLANARITY 0.1 MAX.
 - LOT MARK
 - テープ長さ、巾寸法は参考寸法です。(予告なく変更の可能性があります)
WIDTH AND LENGTH OF THE TAPE ARE FOR REFERENCE, AND ARE SUBJECT TO CHANGE WITHOUT NOICE.
 - 嵌合許容高さでありKC管理寸法ではありません。
IT IS THE MATING ALLOWABLE HEIGHT, NOT THE KC CONTROLLED DIMENSION.
- ※この注記は1ページ目のみ適用
※THIS NOTES IS APPLICABLE TO SHEET-1 ONLY.

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格						
X <10 ±0.2 10≦ X <30 ±0.25 30≦ X ±0.3	UNIT mm		ANGLE 3RD	A	DCN22269	2022/05/17	Y. KITAMURA	M. YOSHIDA
				O	EDN21254	2021/11/29	Y. KITAMURA	M. YOSHIDA
				NO.	EDN/DCN	DATE	ISSUE	CHECKED
ANGLE / 角度 ±3°		SCALE 4 : 1	DATE 2021/11/29	PART NAME / 品名 REC BOARD TO BOARD ST SMT (+11) 0.5 PITCH CONNECTOR				
DRAWN M. TAKAHASHI	DESIGNED Y. KITAMURA	CHECKED	APPROVED M. YOSHIDA	PART NO. / 型番 24 5656 060 X11 829 + T				
				DWG NO. / 図番 BJS 5656019			SHEET/REV 1/2 A	

