


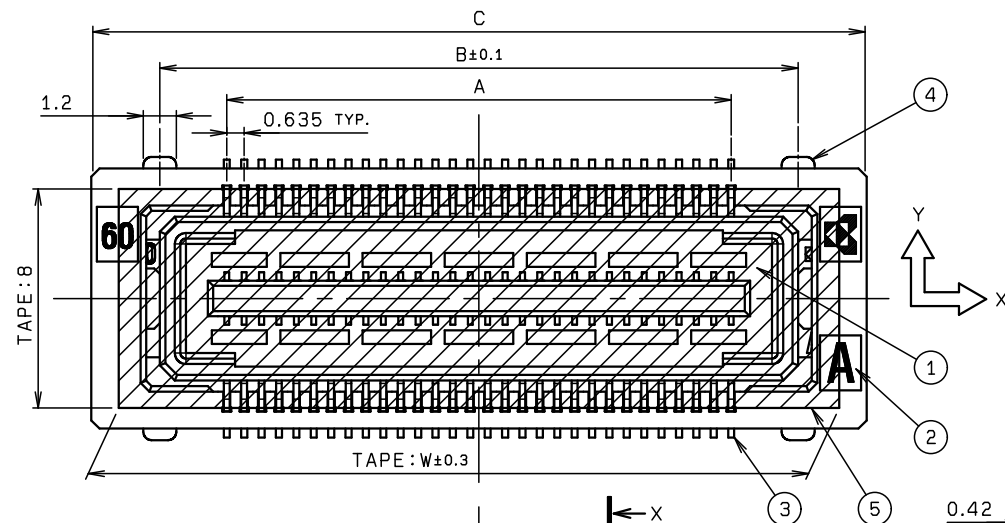


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	LCP		UL94V-0
2	GUIDE PLATE		1	LCP		UL94V-0
3	CONTACT		∅	COPPER ALLOY		AU: CONTACT AREA AU: TAIL AREA
4	ANCHOR PLATE		4	COPPER ALLOY		Sn or Sn-Cu
5	TAPE		(1)	POLYIMIDE		

注 記

- NOTE 1. 嵌合状態のフローティング量
(フローティングはPLUG側にあります)
 $X = \pm 0.5$, $Y = \pm 0.5$
2. 御使用に際しては、コネクタ単体で基板間を保持せず、
スペーサー等の設置をお願いします。
3. 肉盛み等により外觀形状は変更する可能性があります。




④ 粘着することで、テープが湾曲（撓む）場合があります。

5. 抜き（UNMATING）
PLEASE DO NOT UNMATE ONLY ONE SIDE.
BE SURE TO UNMATE EQUALLY BOTH SIDES
AS MUCH AS POSSIBLE.



※この注記は1ページ目のみ適用

※THIS NOTES IS APPLICABLE TO
SHEET-1 ONLY.

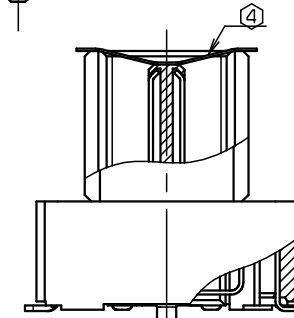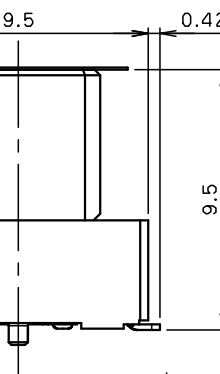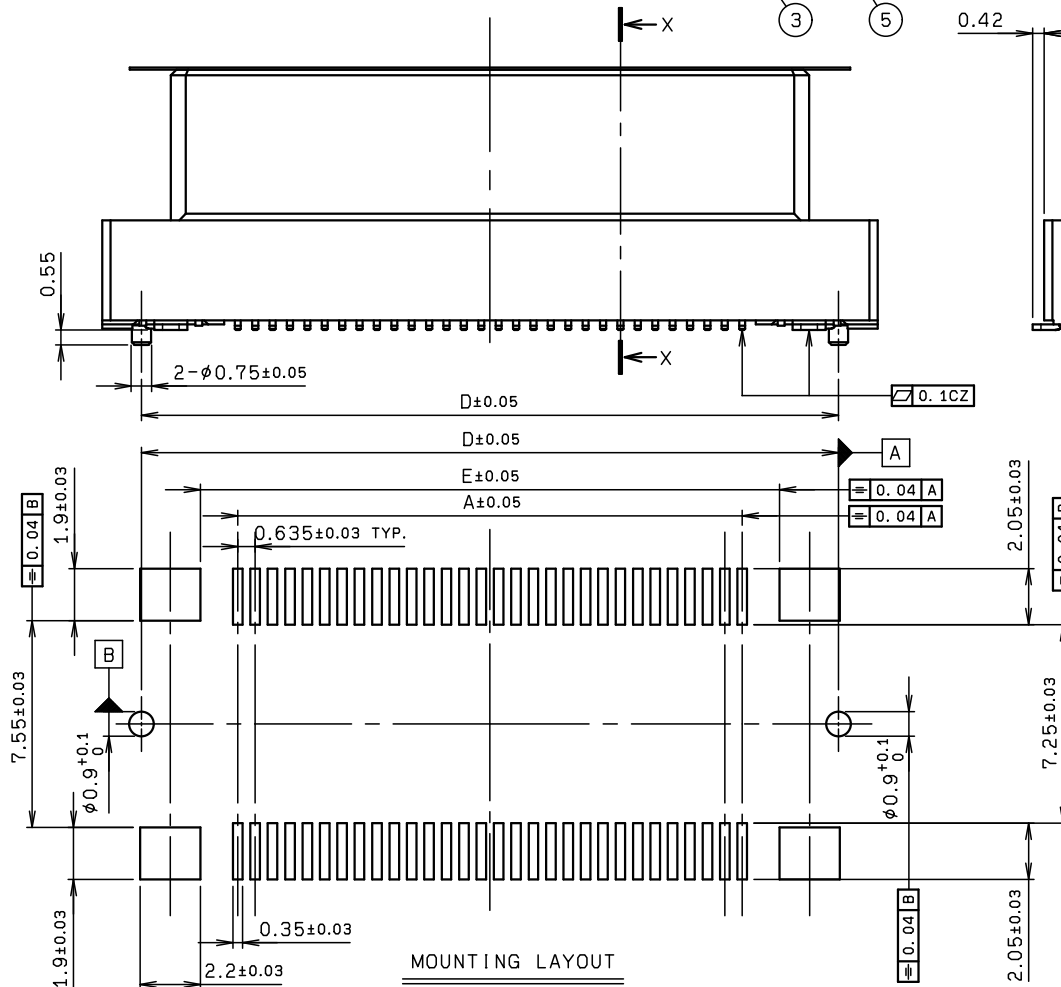

SECT. X-X

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2		UNIT		O EDN-192		2017/04/19			
10≤ X <30 ±0.25		mm		NO.		EDN/DCN		DATE	ISSUE
30≤ X ±0.3		3RD						CHECKED	APPROVED
ANGLE / 角度		SCALE		PART NAME / 品名					
±3°		NTS		SERIES 5690 PLUG ASSY ST SMT					
		DATE		0.635mm PITCH Board to Board					
		2017/04/19							
DRAWN		DESIGNED		PART NO. / 型番					
M. TAKAHASHI		CHECKED		14 5690 XXX 02X 829 +					
		APPROVED							
DWG NO. / 図番				SHEET/REV					
BJS 5690019				1/2 0					
KYOCERA Corporation									



KYOCERA

KYOCERA Corporation


SHEET/REV

1/2 0


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	14 5690 XXX 02X 829 +	350			10 5690 XXX 02X 829 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1			
4	REEL		1	POLYSTYRENE		

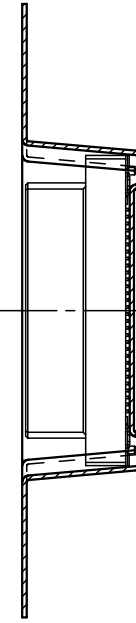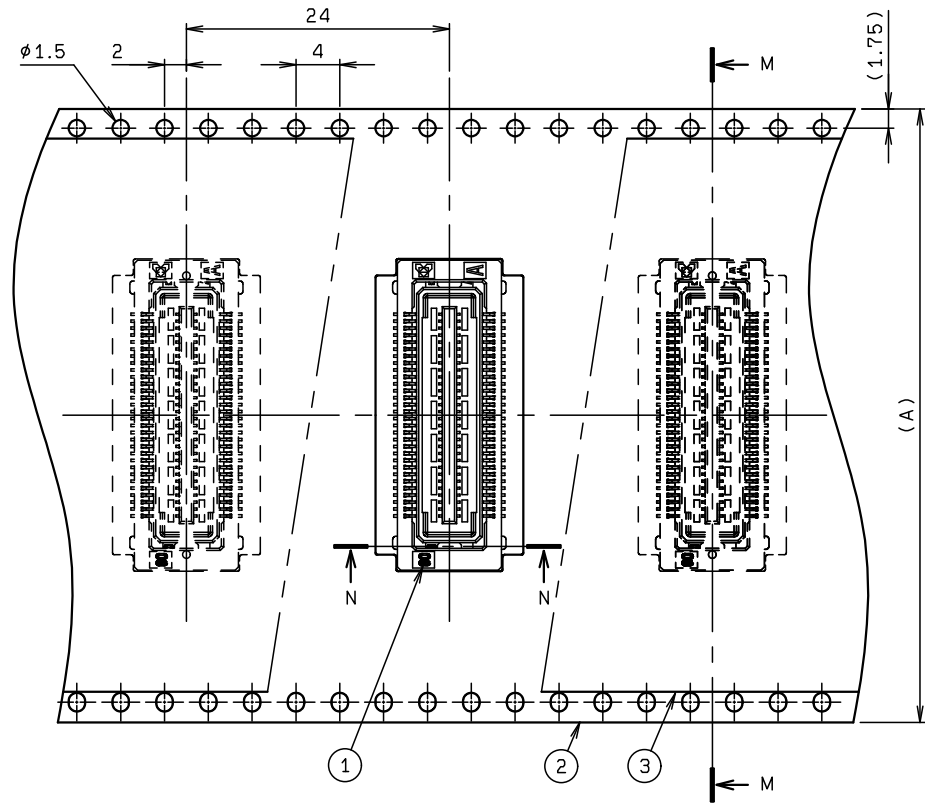

SECT. M-M

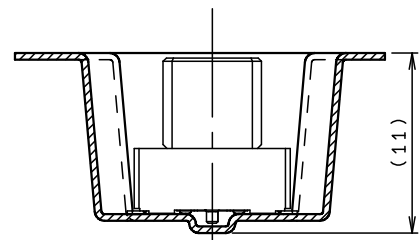

SECT. N-N

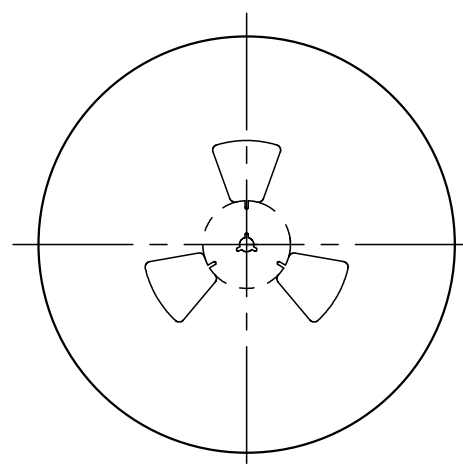


REEL DIMENSION (S=1:5)

極数 NO. OF POS.	A	B
30	44.0	50.4
40	44.0	50.4
60	56.0	62.4
70	56.0	62.4
80	56.0	62.4


※この表は2ページ目にのみ適用
※THIS CHART IS APPLICABLE TO SHEET-2 ONLY.

注 記
NOTE

- 梱包数量 : 350個/リール
PACKING QUANTITY : 350 ea/reel
- 納入時のリール巻き方向
REELING DIRECTION IN DELIVERY



- 引出し方向
USER DIRECTION OF FEED

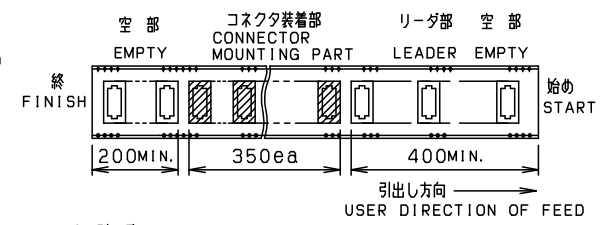

- 型番
NOTE

14 5690 XXX 02X 829 +
極数
NO. OF POS.
バリエーション
VARIATION
2: 自動機生産品
バリエーション
VARIATION
0: ボスなし
WITHOUT BOSS
1: ボスあり
WITH BOSS
2: ボスなし、吸着テープあり
WITHOUT BOSS, WITH VACUUM TAPE
4: ボスあり、吸着テープあり
WITH BOSS, WITH VACUUM TAPE
めっき
PLATING
829: 全体: Ni下地 1.5~6.0 μ m
ALL OVER: Ni UNDER COAT 1.5~6.0 μ m
接触部: Au 0.1 μ m MIN.
CONTACT AREA: Au 0.1 μ m MIN.
テール部: Au 0.07 μ m MIN.
TAIL AREA: Au 0.07 μ m MIN.

※この注記の1~3は2ページ目にのみ適用
※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-2 ONLY.

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ± 0.2									
10 ≤ X < 30 ± 0.25									
30 ≤ X ± 0.3									
ANGLE / 角度		UNIT		ANGLE		PREFER TO SHEET		1/2	
± 3°		mm		3RD					
		SCALE		DATE		NO.		EDN/DCN	DATE
		NTS		2017/04/19		PART NAME / 品名		ISSUE	CHECKED
						SERIES 5690 PLUG ST SMT		APPROVED	
						EMBOSS ASSY			
DRAWN		DESIGNED		CHECKED		PART NO. / 型番			
M. TAKAHASHI				APPROVED		14 5690 XXX 02X 829 +			
						DWG NO. / 図番		SHEET/REV	
						BJS 5690019		2/2 0	