


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	LCP		COLOR: BLACK UL94V-0
2	CONTACT		N	COPPER ALLOY		AU PLATING

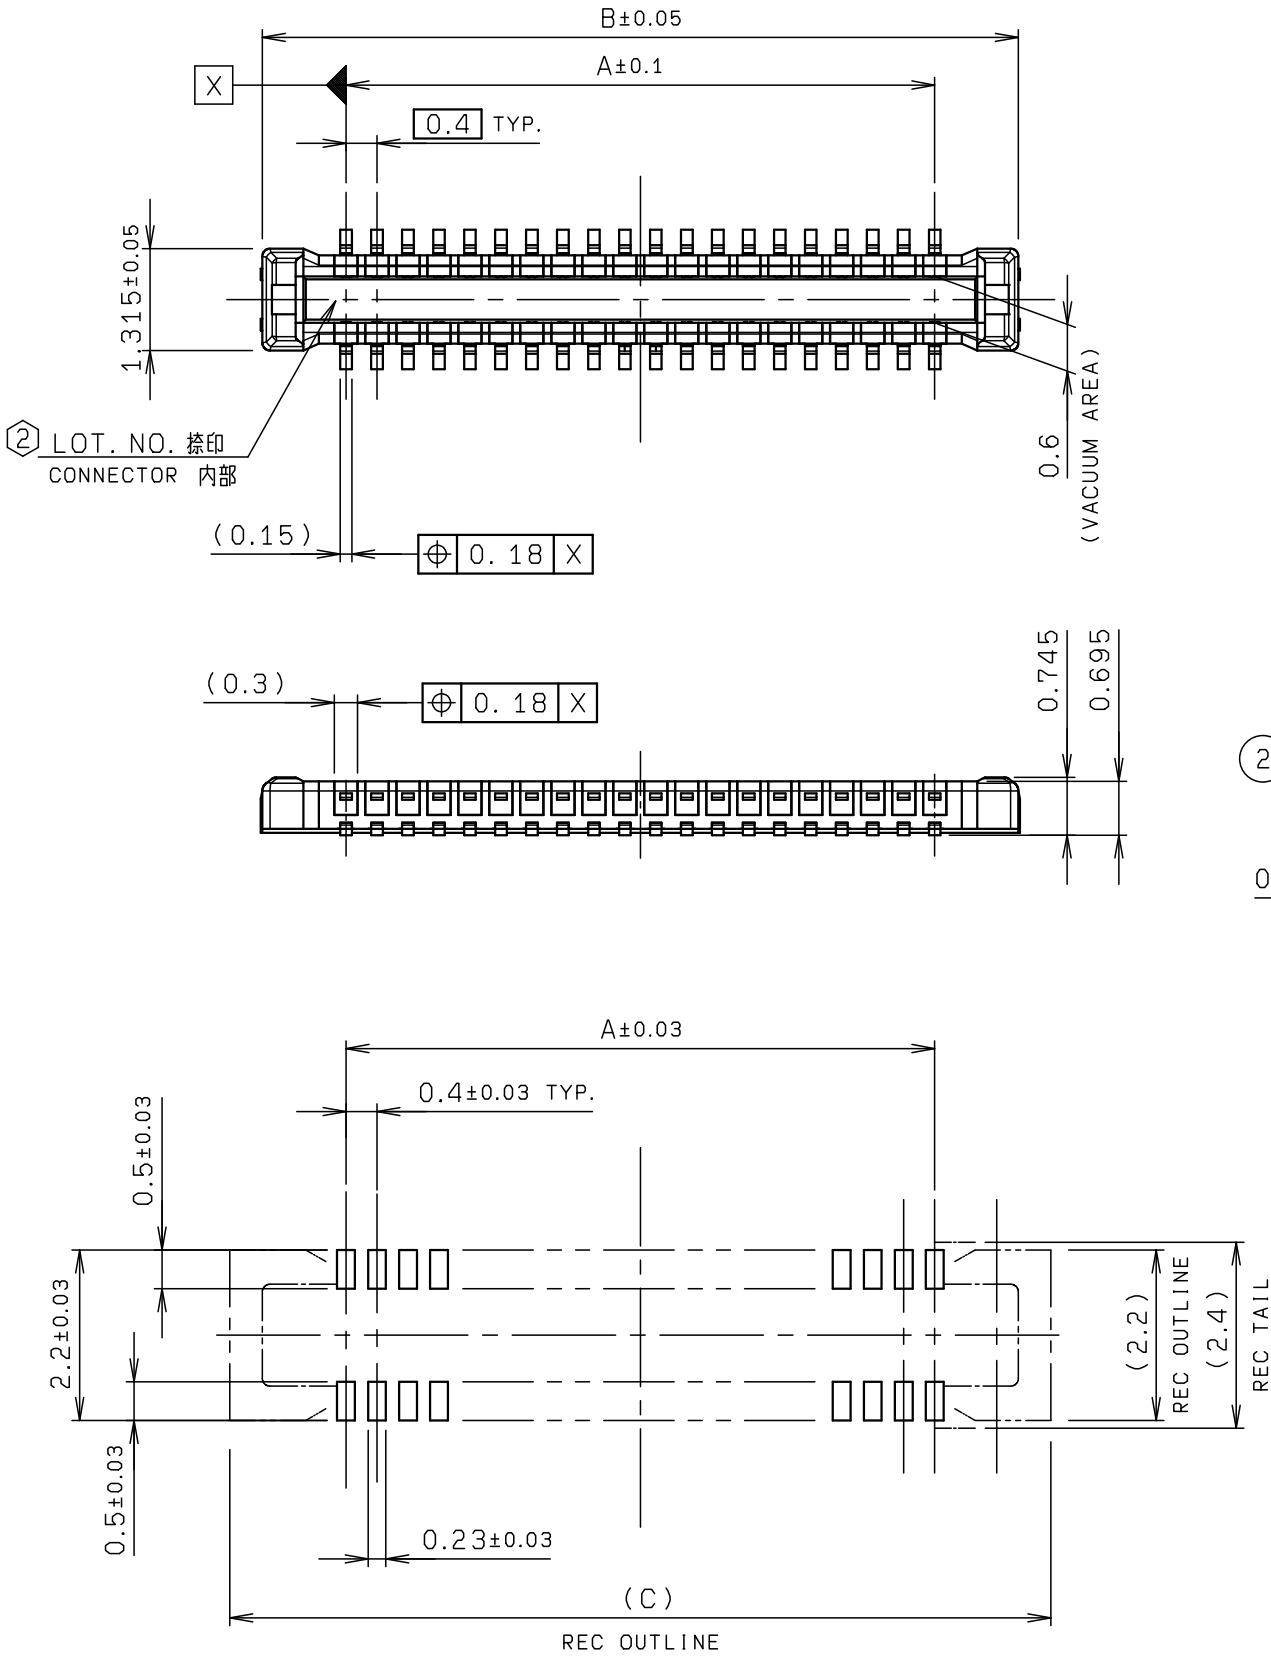

MOUNTING LAYOUT

RoHS規制対応
COMPLIANT WITH
RoHS REGULATIONS

極数 NO. OF POS.	A	B	C
10	1.6	3.76	4.6
12	2.0	4.16	5.0
14	2.4	4.56	5.4
16	2.8	4.96	5.8
18	3.2	5.36	6.2
20	3.6	5.76	6.6
22	4.0	6.16	7.0
24	4.4	6.56	7.4
26	4.8	6.96	7.8
30	5.6	7.76	8.6
32	6.0	8.16	9.0
34	6.4	8.56	9.4
40	7.6	9.76	10.6
44	8.4	10.56	11.4
50	9.6	11.76	12.6
54	10.4	12.56	13.4
60	11.6	13.76	14.6

※この表は1ページ目にのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 ONLY.

注 記
NOTE

① テールの輪郭度は、0.08MAX.
COPLANARITY OF CONTACT TAIL
IS 0.08MAX.

② 図示の位置にLOT NO. を刻印する。(レーザー)
LOT NO. SHALL BE MARKED
AT THE SPECIFIED POSITION. (LASER)






K n S
工場コード
製造週
「K」表示(固定)

※この注記は1ページ目にのみ適用
※THIS NOTE IS APPLICABLE TO SHEET-1 ONLY.

技術部
'23.08.08
発行

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		E	DCN18856	2018/11/19	S. WU		A. TSUNEMURA
X <10 ±0.2 10 ≤ X <30 ±0.25 30 ≤ X ±0.3				D	DCN-779	2016/08/19	G. YAMAZAKI	A. TSUNEMURA	K. YAMANE
		UNIT	ANGLE	O	EDN-226	2009/06/05	T. SASAKI		K. HONDA
		mm	3RD	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE 10:1	DATE 2009/06/05	PART NAME / 品名 SERIES 5804 PLUG ASSY 0.4mm PITCH BOARD TO BOARD H=0.9					
DRAWN T. SASAKI	DESIGNED T. SASAKI	CHECKED	APPROVED K. HONDA	PART NO. / 型番 14 5804 XXX 000 829 +					
DWG NO. / 図番 BJS 5804003				SHEET/REV 1/2 E					

KYOCERA

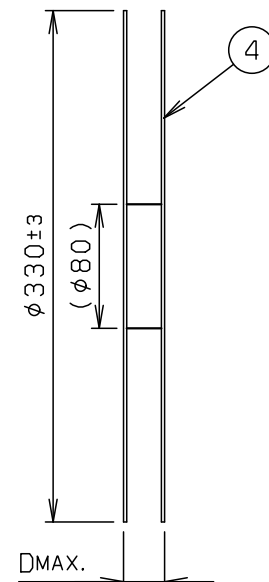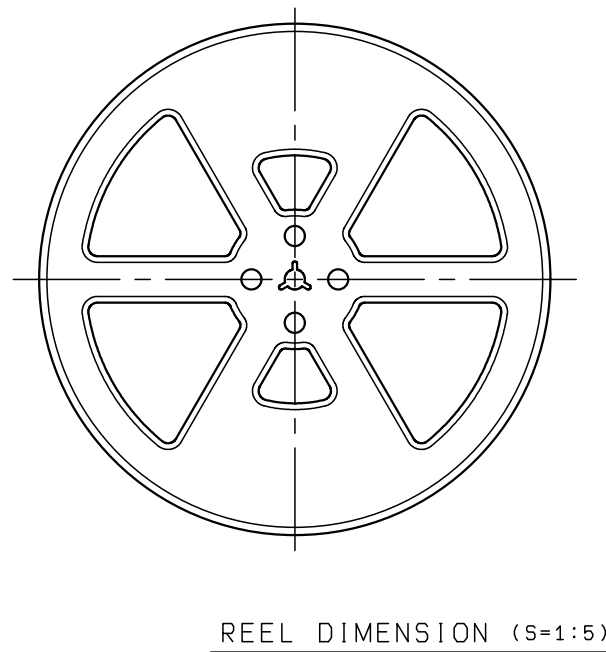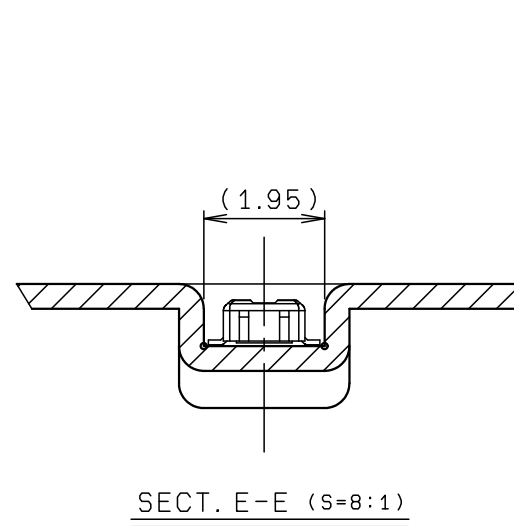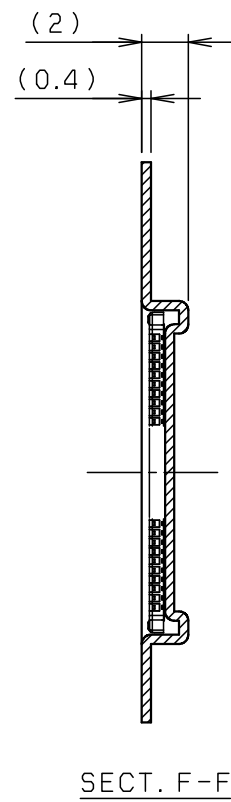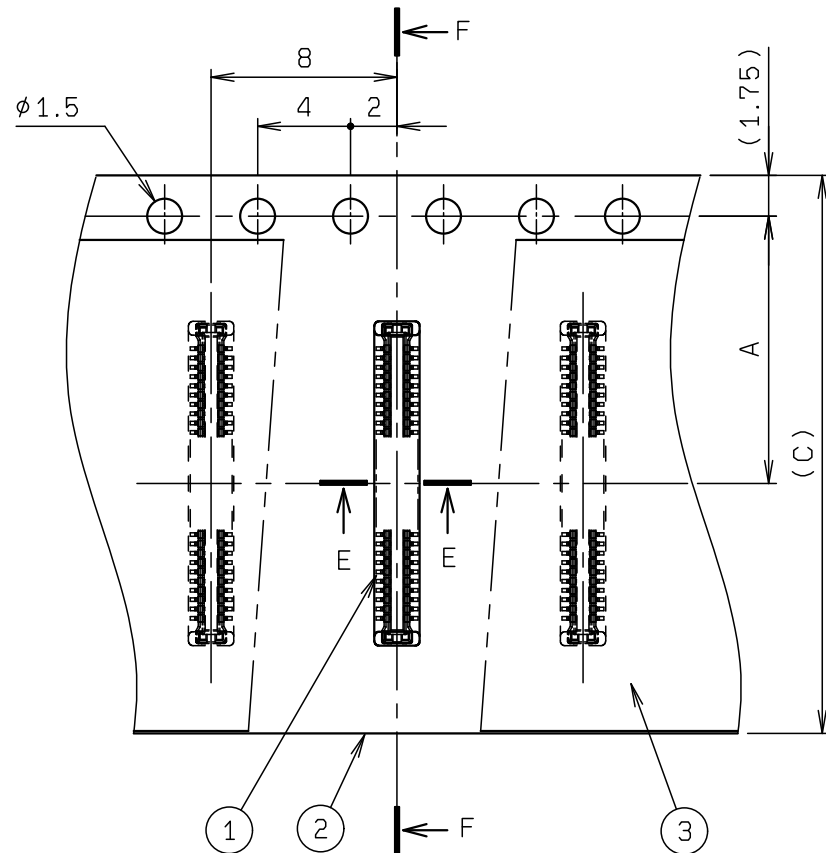

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	14 5804 XXX 000 829 +	3000			10 5804 XXX 000 829 +
2	EMBOSSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	PET		
4	REEL		1	POLYSTYRENE		


極 数 NO. OF POS.	A	B	C	D
10	5.5	-	12.0	18.4
12	5.5	-	12.0	18.4
14	7.5	-	16.0	22.4
16	7.5	-	16.0	22.4
18	7.5	-	16.0	22.4
20	7.5	-	16.0	22.4
22	7.5	-	16.0	22.4
24	7.5	-	16.0	22.4
26	7.5	-	16.0	22.4
30	7.5	-	16.0	22.4
32	7.5	-	16.0	22.4
34	11.5	-	24.0	30.4
40	11.5	-	24.0	30.4
44	11.5	-	24.0	30.4
50	11.5	-	24.0	30.4
54	11.5	-	24.0	30.4
60	11.5	-	24.0	30.4

※この表は2ページ目にのみ適用
※THIS CHART IS APPLICABLE TO SHEET-2 ONLY.


注 記
NOTE

1. 梱包数量 : 3000 個/リール
PACKING QUANTITY : 3000 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

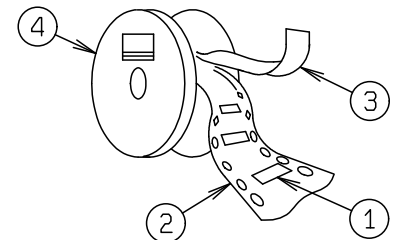

3. 引出し方向
USER DIRECTION OF FEED

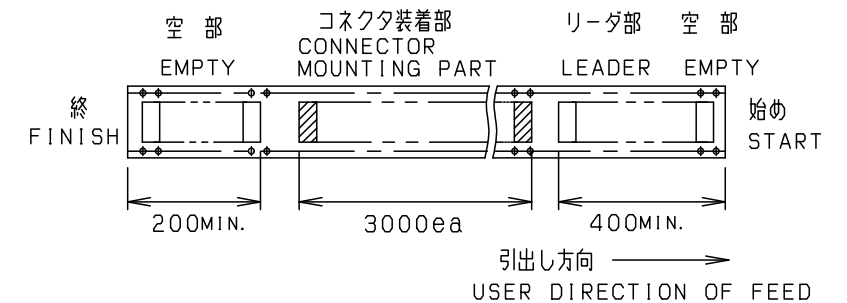

4. 型番
P/N 14 5804 XXX 000 829 +

極 数
NO. OF POS.
バリエーション
VARIATION
0: WITHOUT VACUUM ITEM
バリエーション
VARIATION

	ANCHOR PLATE	BOSS
0	-	-

@: WITH
-: WITHOUT

※この注記の1~3は2ページ目にのみ適用
※THESE NOTES 1 TO 3 ARE APPLICABLE TO SHEET-2 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ± 0.2		UNIT		ANGLE		REFER TO SHEET		1/2	
10 $\leq$ X < 30 ± 0.25		mm		3RD		NO.		EDN/DCN	
30 $\leq$ X ± 0.3		SCALE		DATE		DATE		ISSUE	
ANGLE / 角度 $\pm 3^\circ$		3 : 1		2009/06/05		PART NAME / 品名		CHECKED	
DRAWN		DESIGNED		CHECKED		APPROVED		PART NO. / 型番	
T. SASAKI		T. SASAKI		K. HONDA		14 5804 XXX 000 829 +		DWG NO. / 図番	
						BJS 5804003		SHEET REV	
								12/2 E	

KYOCERA