

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	LCP		COLOR: BLACK UL94V-0
2	CONTACT		N	COPPER ALLOY		AU PLATING


極 数 NO. OF POS.	A	B	C
10	1. 6	3. 76	4. 6
12	2. 0	4. 16	5. 0
14	2. 4	4. 56	5. 4
16	2. 8	4. 96	5. 8
18	3. 2	5. 36	6. 2
20	3. 6	5. 76	6. 6
22	4. 0	6. 16	7. 0
24	4. 4	6. 56	7. 4
26	4. 8	6. 96	7. 8
30	5. 6	7. 76	8. 6
32	6. 0	8. 16	9. 0
34	6. 4	8. 56	9. 4
40	7. 6	9. 76	10. 6
44	8. 4	10. 56	11. 4
50	9. 6	11. 76	12. 6
54	10. 4	12. 56	13. 4
60	11. 6	13. 76	14. 6
64	12. 4	14. 56	15. 4
70	13. 6	15. 76	16. 6

※この表は1ページ目にのみ適用
※THIS CHART IS APPLICABLE TO SHEET-1 ONLY.

- 注 記
NOTE
- ① テールの輪郭度は、0. 08MAX.
COPLANARITY OF CONTACT TAIL
IS 0. 08MAX.
- ② 図示の位置にLOT NO. を刻印する。(レーザー)
LOT NO. SHALL BE MARKED
AT THE SPECIFIED POSITION. (LASER)
- a) 24P~
K 3 01 S
工場コード
製造日 1、2、~29、30、31.
製造月 1、2、~9、X、Y、Z.
「K」表示(固定)
- b) ~22P
K n S
工場コード
製造週
「K」表示(固定)

※この注記は1ページ目にのみ適用
※THIS NOTE IS APPLICABLE TO SHEET-1 ONLY.

技術部
'23.08.08
発行

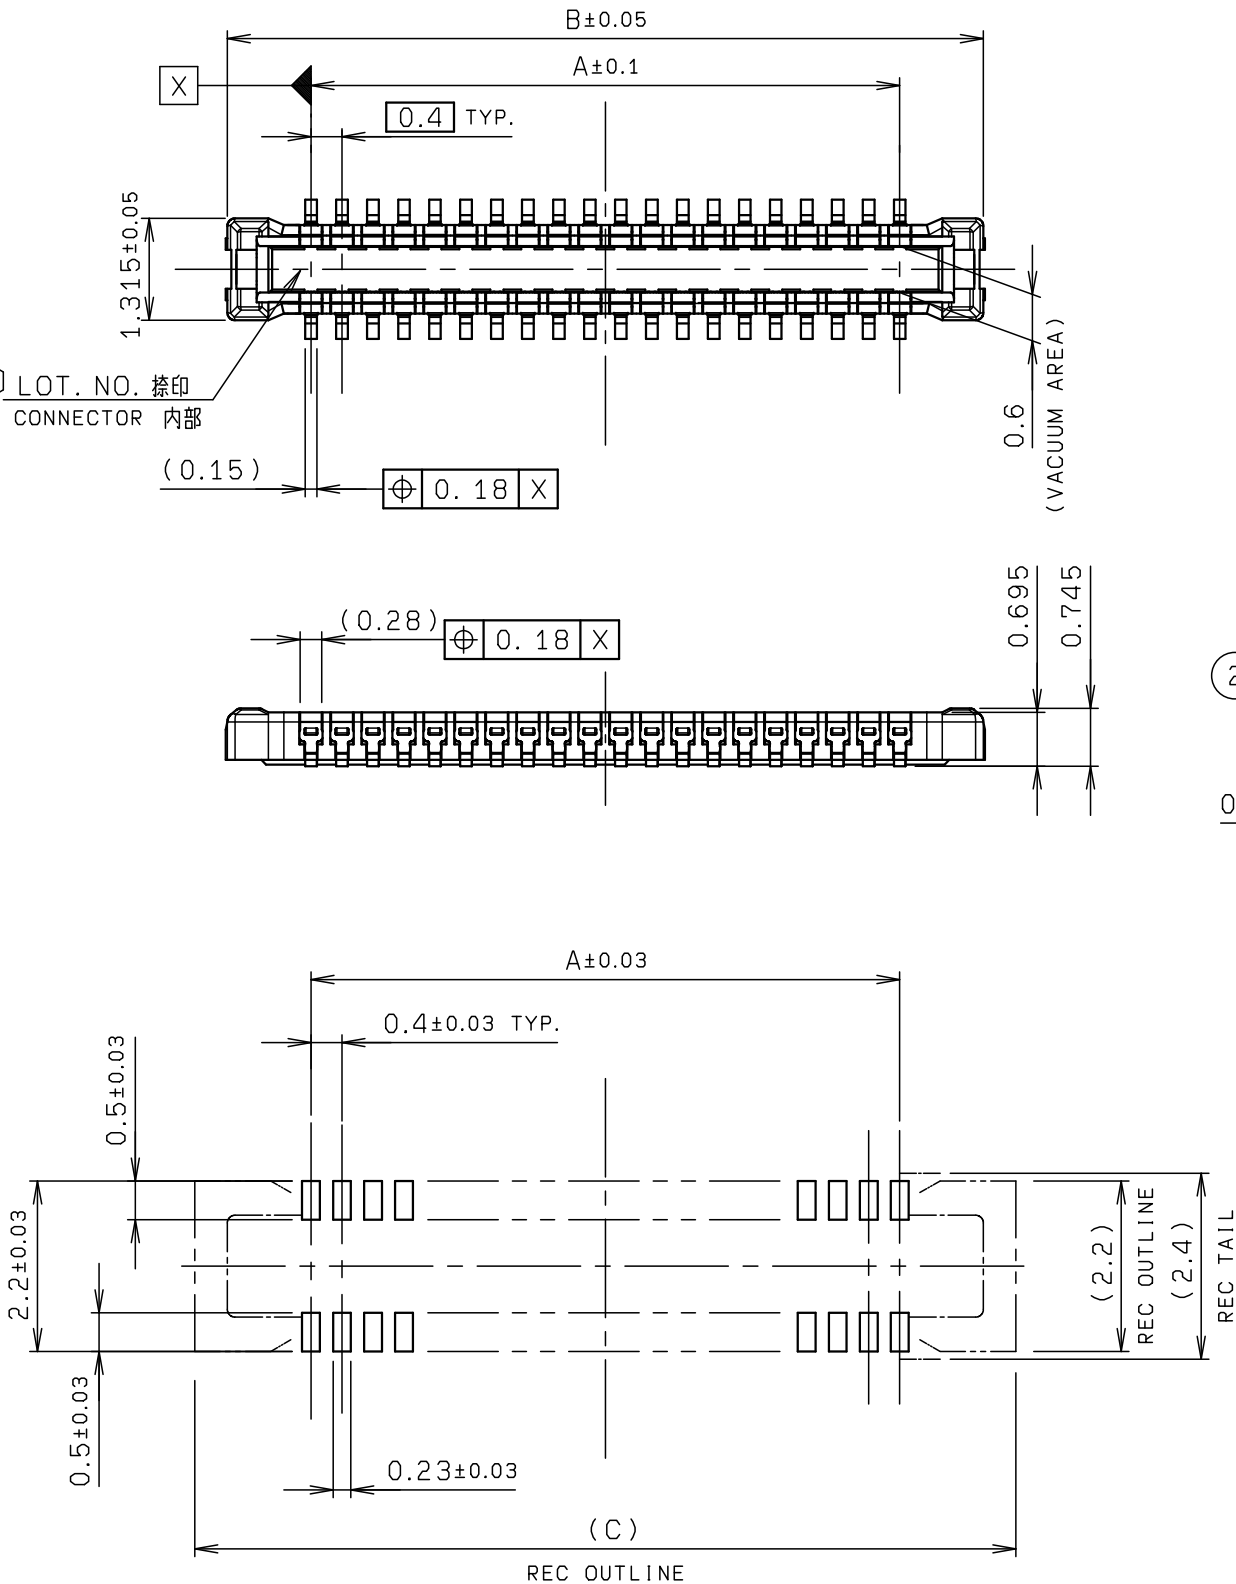



MOUNTING LAYOUT

RoHS規制対応
COMPLIANT WITH
RoHS REGULATIONS




TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		G	DCN18856	2018/11/19	S. WU		A. TSUNEMURA
X <10 ±0. 2				F	DCN-753	2017/08/01	K. YAMANE		A. TSUNEMURA
10≤ X <30 ±0. 25		UNIT mm		O	EDN-155	2015/04/03	R. USAMI	T. SUGIKI	T. SASAKI
30≤ X ±0. 3		ANGLE 3RD		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE 10: 1		PART NAME / 品名					
		DATE 2015/04/03		SERIES 5804 PLUG ASSY WITHOUT ANCHOR PLATE					
DRAWN M. TAKAHASHI		DESIGNED R. USAMI		0. 4mm PITCH BOARD TO BOARD H=0. 9 PRESS-FIT					
CHECKED T. SUGIKI		APPROVED T. SASAKI		PART NO. / 型番					
				14 5804 XXX 020 829 +					
				DWG NO. / 図番					
				BJS 5804084					
				SHEET/REV					
				1/2 G					

KYOCERA

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

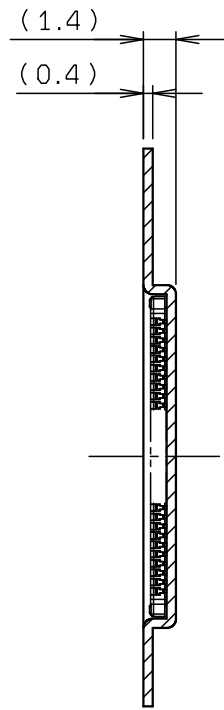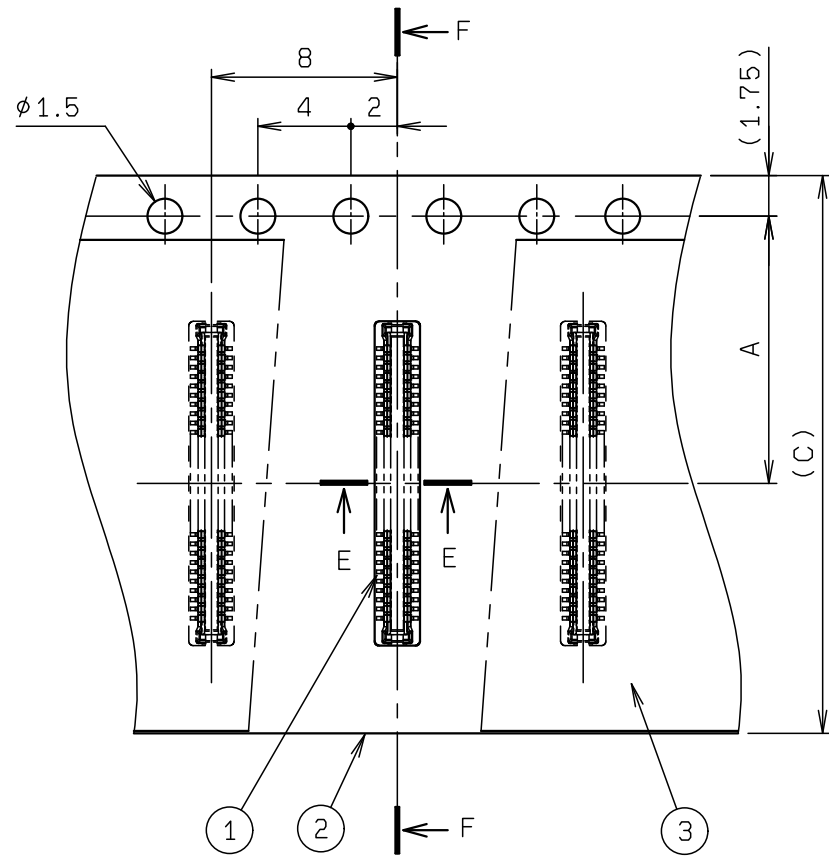

SECT. F-F

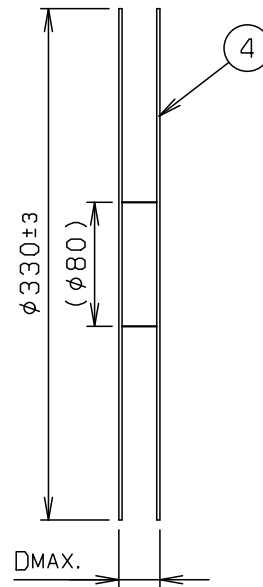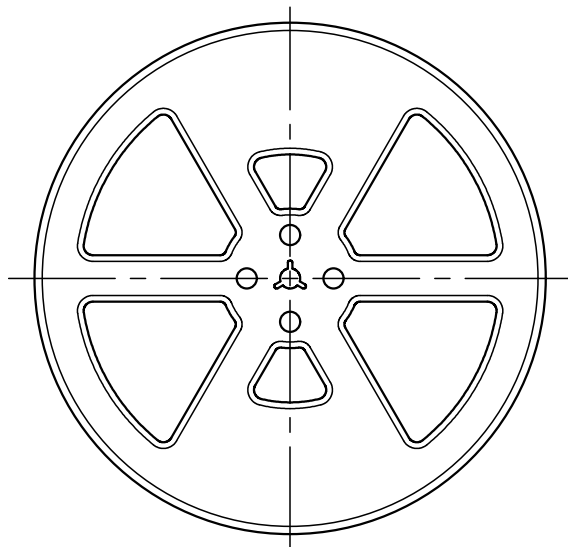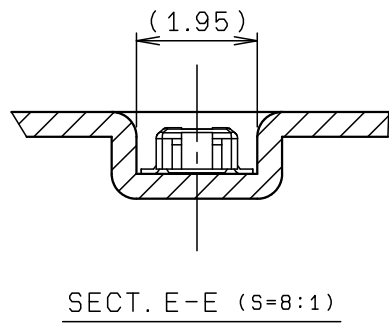

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	14 5804 XXX 020 829 +	5000			10 5804 XXX 020 829 +
2	EMBOSSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	PET		
4	REEL		1	POLYSTYRENE		


極 数 NO. OF POS.	A	B	C	D
10	5.5	-	12.0	18.4
12	5.5	-	12.0	18.4
14	7.5	-	16.0	22.4
16	7.5	-	16.0	22.4
18	7.5	-	16.0	22.4
20	7.5	-	16.0	22.4
22	7.5	-	16.0	22.4
24	7.5	-	16.0	22.4
26	7.5	-	16.0	22.4
30	7.5	-	16.0	22.4
32	7.5	-	16.0	22.4
34	11.5	-	24.0	30.4
40	11.5	-	24.0	30.4
44	11.5	-	24.0	30.4
50	11.5	-	24.0	30.4
54	11.5	-	24.0	30.4
60	11.5	-	24.0	30.4
64	11.5	-	24.0	30.4
70	11.5	-	24.0	30.4

※この表は2ページ目にのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-2 ONLY.


注 記
NOTE

1. 梱包数量 : 5000 個/リール
PACKING QUANTITY : 5000 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

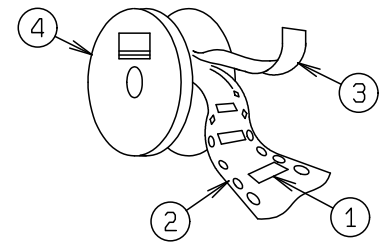

3. 引出し方向
USER DIRECTION OF FEED

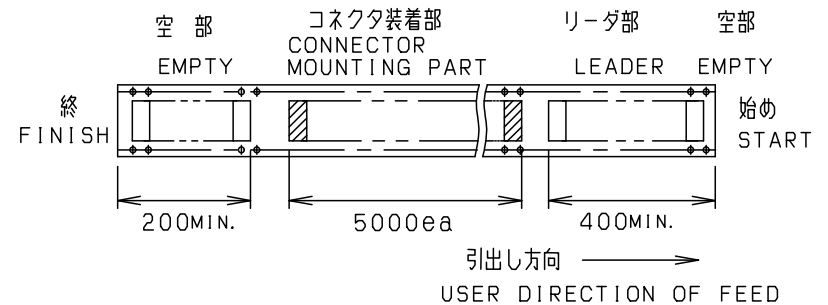

4. 型 番
P/N 14 5804 XXX 020 829 +

極 数
NO. OF POS.

バリエーション
VARIATION
0: WITHOUT VACUUM ITEM

2: PRESS-FIT TYPE

バリエーション
VARIATION

	ANCHOR PLATE	BOSS
0	-	-

◎: WITH
-: WITHOUT

※この注記の1～3は2ページ目にのみ適用
※THESE NOTES 1 TO 3 ARE APPLICABLE
TO SHEET-2 ONLY.

技術部
'23.08.08
発行

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2		UNIT		ANGLE		REFER TO SHEET 1/2			
10 ≤ X < 30 ±0.25		mm		3RD		NO.	EDN/DCN	DATE	ISSUE
30 ≤ X ±0.3		SCALE		DATE		PART NAME / 品名			
ANGLE / 角度		3 : 1		2015/04/03		SERIES 5804 PLUG ASSY WITHOUT ANCHOR PLATE			
±3°		DRAWN		DESIGNED		0.4mm PITCH BOARD TO BOARD H=0.9 PRESS-FIT			
		M. TAKAHASHI		R. USAMI		PART NO. / 型番			
		T. SUGIKI		T. SASAKI		14 5804 XXX 020 829 +			
						DWG NO. / 図番			
						BJS 5804084			
						SHEET/REV			
						12/2 G			

KYOCERA