

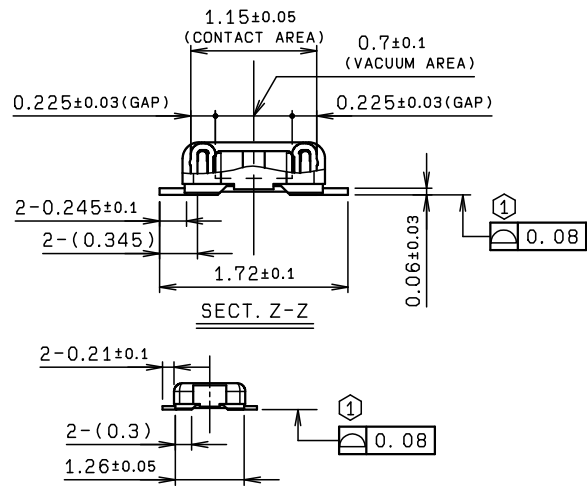
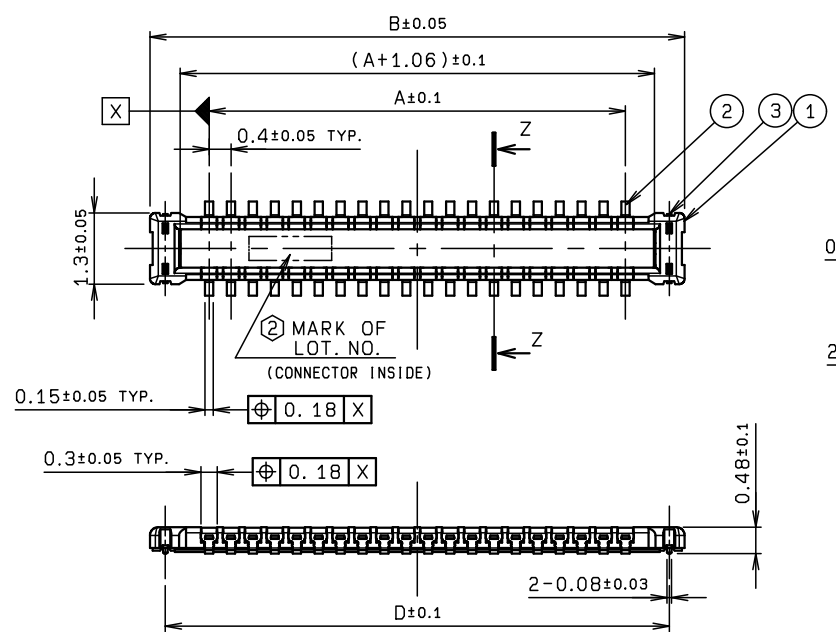


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	LCP		COLOR:BLACK UL94V-0
2	CONTACT		N	COPPER ALLOY		Au
3	ANCHOR PLATE		2	COPPER ALLOY		Sn-Cu

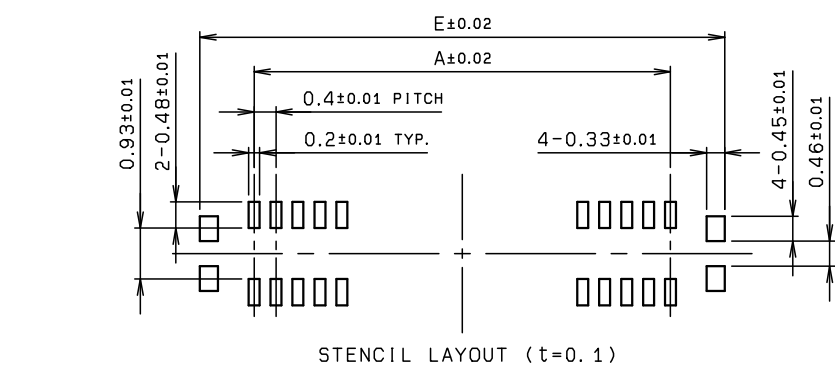

極数 NO. OF POS.	A	B	C	D	E	H
10	1.6	3.76	5.0	3.2	3.58	4.2
12	2.0	4.16	5.4	3.6	3.98	4.6
14	2.4	4.56	5.8	4.0	4.38	5.0
16	2.8	4.96	6.2	4.4	4.78	5.4
18	3.2	5.36	6.6	4.8	5.18	5.8
20	3.6	5.76	7.0	5.2	5.58	6.2
22	4.0	6.16	7.4	5.6	5.98	6.6
24	4.4	6.56	7.8	6.0	6.38	7.0
26	4.8	6.96	8.2	6.4	6.78	7.4
30	5.6	7.76	9.0	7.2	7.58	8.2
32	6.0	8.16	9.4	7.6	7.98	8.6
34	6.4	8.56	9.8	8.0	8.38	9.0
40	7.6	9.76	11.0	9.2	9.58	10.2
44	8.4	10.56	11.8	10.0	10.38	11.0
50	9.6	11.76	13.0	11.2	11.58	12.2
54	10.4	12.56	13.8	12.0	12.38	13.0
60	11.6	13.76	15.0	13.2	13.58	14.2

※この表は1ページ目のみ適用
※THIS CHART IS APPLICABLE TO SHEET-1 ONLY.

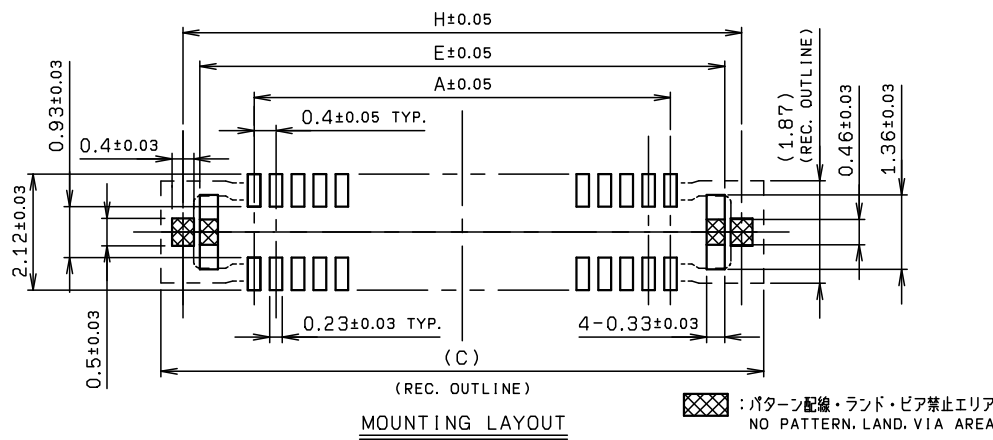

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

注 記
NOTE

① テール及び金具底面の相互の輪郭度は、0.08MAX.
COPLANARITY OF CONTACT TAIL
AND ANCHOR PLATE IS 0.08MAX.

② 図示の位置にLOT NO. を刻印する。(レーザー)
LOT NO. SHALL BE MARKED
AT THE SPECIFIED POSITION. (LASER)


a) 24P~ K 3 01 S
工場コード
製造日 1、2、~29、30、31.
製造月 1、2、~9、X、Y、Z.
「K」表示(固定)

b) ~22P K n S
工場コード
製造週
「K」表示(固定)


※この注記は1ページ目のみ適用
※THIS NOTES IS APPLICABLE TO SHEET-1 ONLY.

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		E	DCN-830	2017/08/23			
X < 10 ±0.2		UNIT		D	DCN-1035	2015/09/14	G. IKEDA	K. HIRATA	T. SASAKI
10 ≤ X < 30 ±0.25		mm		O	EDN-857	2012/11/22	K. YAMANE		T. SASAKI
30 ≤ X ±0.3		3RD		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE NTS		PART NAME / 品名					
DRAWN K. YAMANE		DESIGNED K. YAMANE		SERIES 5806 PLUG ASSY					
CHECKED		DATE 2012/11/22		0.4mm PITCH BOARD TO BOARD H=0.6					
APPROVED T. SASAKI		PART NO. / 製番		14 5806 XXX 002 829 +					
DWG NO. / 図番		KYOCERA Corporation		DWG NO. / 図番 BJS 5806007					
				SHEET/REV 1/2 E					


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	14 5806 XXX 002 829 +	5000			10 5806 XXX 002 829 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	PET		
4	REEL		1	POLYSTYRENE		

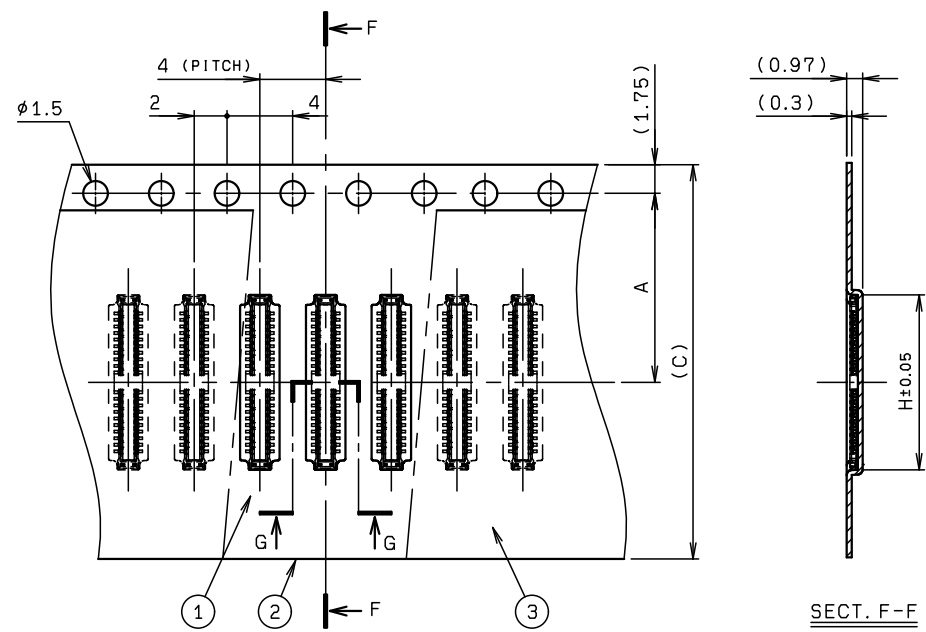


SECT. F-F



SECT. G-G (S=8:1)

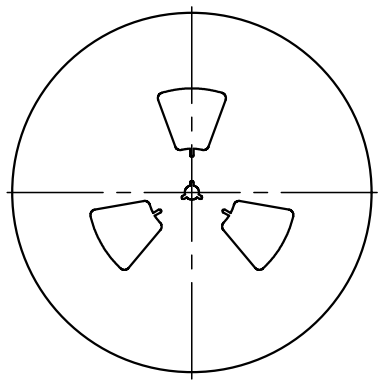



REEL DIMENSION (S=1:5)

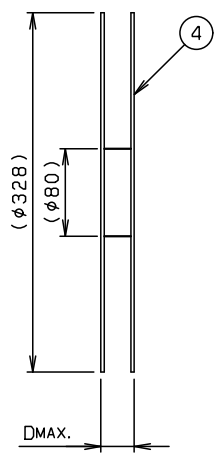

極数 NO. OF POS.	A	B	C	D	H
10	5.5	-	12.0	18.4	3.84
12	5.5	-	12.0	18.4	4.24
14	7.5	-	16.0	22.4	4.64
16	7.5	-	16.0	22.4	5.04
18	7.5	-	16.0	22.4	5.44
20	7.5	-	16.0	22.4	5.84
22	7.5	-	16.0	22.4	6.24
24	7.5	-	16.0	22.4	6.64
26	7.5	-	16.0	22.4	7.04
30	7.5	-	16.0	22.4	7.84
32	7.5	-	16.0	22.4	8.24
34	11.5	-	24.0	30.4	8.64
36	11.5	-	24.0	30.4	9.04
40	11.5	-	24.0	30.4	9.84
44	11.5	-	24.0	30.4	10.64
50	11.5	-	24.0	30.4	11.84
54	11.5	-	24.0	30.4	12.64
60	11.5	-	24.0	30.4	13.84

※この表は2ページ目区のみ適用
※THIS CHART IS APPLICABLE TO SHEET-2 ONLY.

注記
NOTE

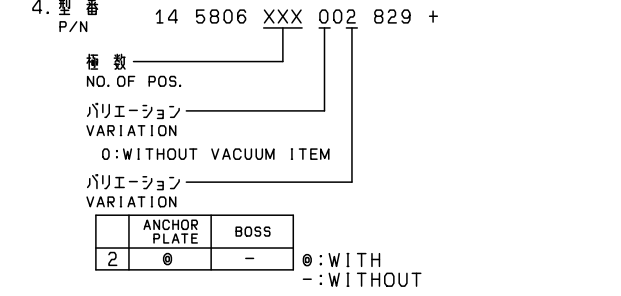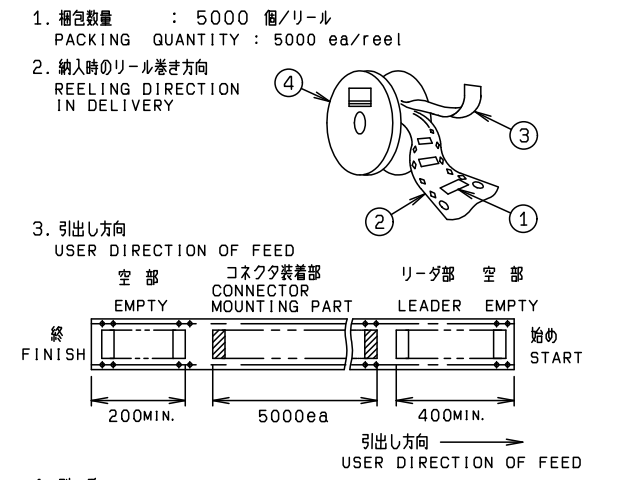

※この注記の1～3は2ページ目区のみ適用
※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-2 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格					
X < 10 ±0.2 10 ≤ X < 30 ±0.25 30 ≤ X ±0.3	UNIT mm	ANGLE 3RD		REFER TO SHEET 1/2			
		SCALE 3 : 1		NO.	EDN/DCN	DATE	ISSUE
		DATE 2012/11/22		PART NAME / 品名 SERIES 5806 EMBOSS TAPE ASSY PLUG ASSY ST SMT H=0.6			
DRAWN K. YAMANE	DESIGNED K. YAMANE	CHECKED	APPROVED T. SASAKI	PART NO. / 製番 14 5806 XXX 002 829 +			
DWG NO. / 図番 BJS 5806007				SHEET/REV 2/2 E			

KYOCERA Corporation