

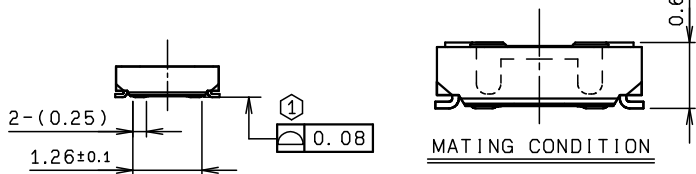
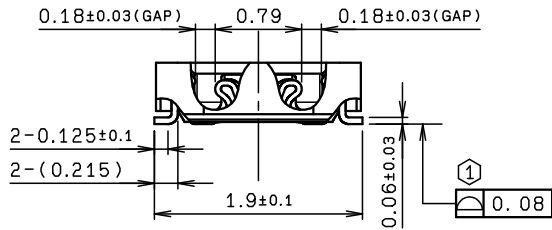


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	LCP		COLOR:BLACK UL94V-0
2	CONTACT		N	COPPER ALLOY		Au
3	ANCHOR PLATE		2	COPPER ALLOY		Sn-Cu

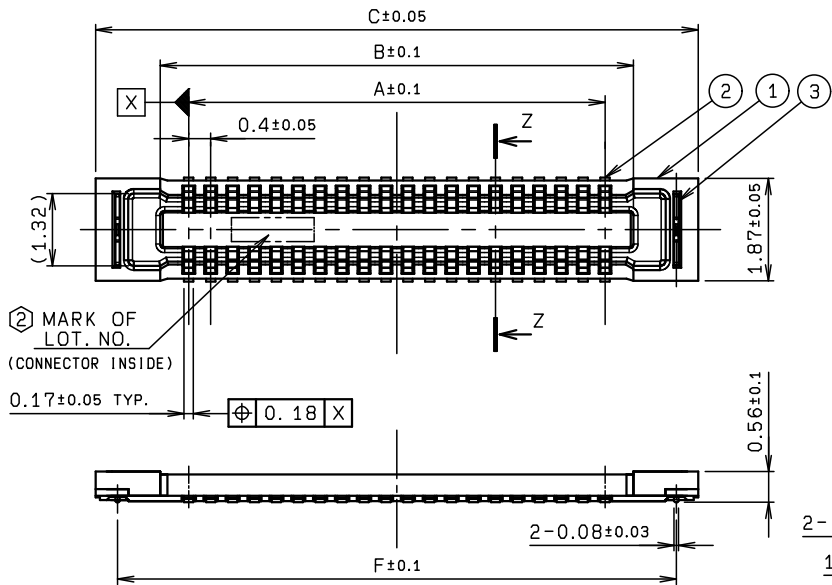


極数 NO. OF POS.	A	B	C	F	G
10	1.6	2.64	5.0	4.2	4.58
12	2.0	3.04	5.4	4.6	4.98
14	2.4	3.44	5.8	5.0	5.38
16	2.8	3.84	6.2	5.4	5.78
18	3.2	4.24	6.6	5.8	6.18
20	3.6	4.64	7.0	6.2	6.58
22	4.0	5.04	7.4	6.6	6.98
24	4.4	5.44	7.8	7.0	7.38
26	4.8	5.84	8.2	7.4	7.78
30	5.6	6.64	9.0	8.2	8.58
32	6.0	7.04	9.4	8.6	8.98
34	6.4	7.44	9.8	9.0	9.38
40	7.6	8.64	11.0	10.2	10.58
44	8.4	9.44	11.8	11.0	11.38
50	9.6	10.64	13.0	12.2	12.58
54	10.4	11.44	13.8	13.0	13.38
60	11.6	12.64	15.0	14.2	14.58

※この表は1ページ目にのみ適用
※THIS CHART IS APPLICABLE TO SHEET-1 ONLY.

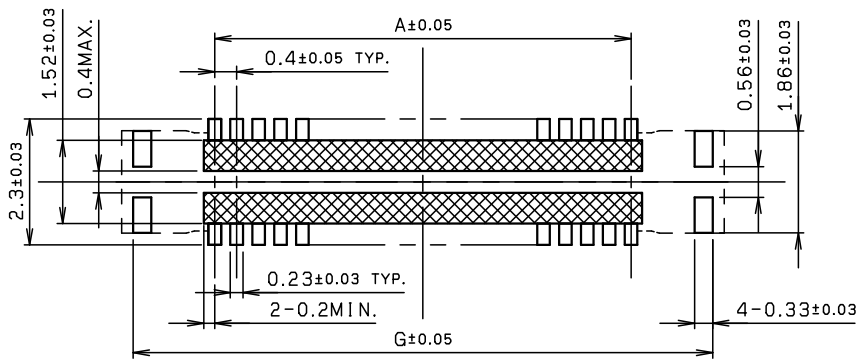

MOUNTING LAYOUT

NO PATTERN. LAND. VIA AREA

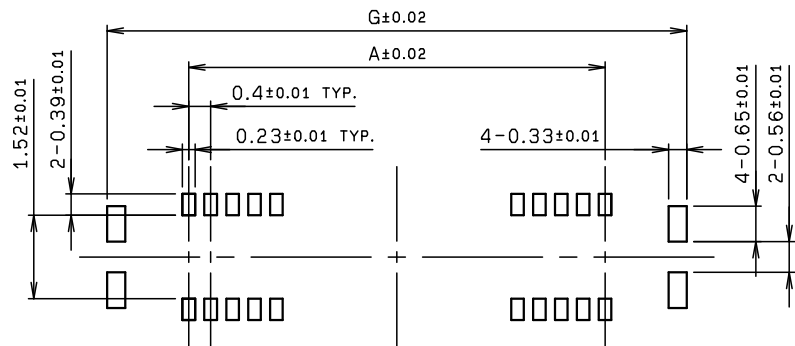

STENCIL LAYOUT (t=0.1)

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


注 記
NOTE

- ① テール及び金具底面の相互の輪郭度は、0.08MAX.
COPLANARITY OF CONTACT TAIL
AND ANCHOR PLATE IS 0.08MAX.
- ② 図示の位置にLOT NO. を刻印する。(レーザー)
LOT NO. SHALL BE MARKED
AT THE SPECIFIED POSITION. (LASER)
- a) 24P~ K 3 01 S
工場コード
製造日 1、2、~29、30、31.
製造月 1、2、~9、X、Y、Z.
「K」表示(固定)
- b) ~22P K n S
工場コード
製造週
「K」表示(固定)



※この注記は1ページ目にのみ適用
※THIS NOTES IS APPLICABLE TO SHEET-1 ONLY.

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		E	DCN-830	2017/08/23			
X <10 ±0.2		UNIT		D	DCN-1035	2015/09/14	G. IKEDA	K. HIRATA	T. SASAKI
10 ≤ X <30 ±0.25		mm		O	EDN-352	2013/06/14	K. YAMANE		T. MORI
30 ≤ X ±0.3		3RD		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE NTS		PART NAME / 品名					
DRAWN K. YAMANE		DESIGNED K. YAMANE		SERIES 5806 REC ASSY					
CHECKED		APPROVED T. MORI		0.4mm PITCH BOARD TO BOARD H=0.6					
DWG NO. / 図番		PART NO. / 製番		24 5806 XXX 112 829 +					
KYOCERA		KYOCERA Corporation		DWG NO. / 図番					
				BJS 5806014					
				SHEET/REV 1/2 E					

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	24 5806 XXX 112 829 +	5000			20 5806 XXX 112 829 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	PET		
4	REEL		1	POLYSTYRENE		

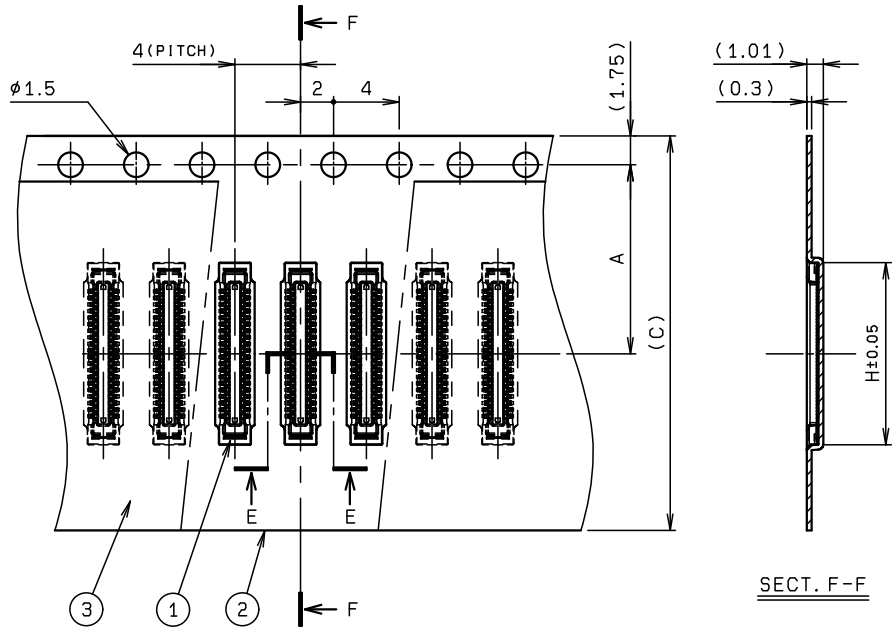

SECT. F-F

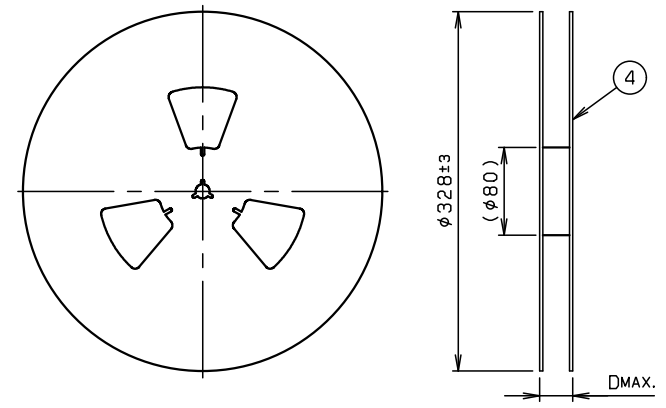

REEL DIMENSION (S=1:5)


極数 NO. OF POS.	A	B	C	D	H
10	5.5	-	12.0	18.4	5.08
12	5.5	-	12.0	18.4	5.48
14	7.5	-	16.0	22.4	5.88
16	7.5	-	16.0	22.4	6.28
18	7.5	-	16.0	22.4	6.68
20	7.5	-	16.0	22.4	7.08
22	7.5	-	16.0	22.4	7.48
24	7.5	-	16.0	22.4	7.88
26	7.5	-	16.0	22.4	8.28
30	7.5	-	16.0	22.4	9.08
32	7.5	-	16.0	22.4	9.48
34	11.5	-	24.0	30.4	9.88
36	11.5	-	24.0	30.4	10.28
40	11.5	-	24.0	30.4	11.08
44	11.5	-	24.0	30.4	11.88
50	11.5	-	24.0	30.4	13.08
54	11.5	-	24.0	30.4	13.88
60	11.5	-	24.0	30.4	15.08

※この表は2ページ目にのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-2 ONLY.


注記
NOTE

1. 梱包数量 : 5000 個/リール
PACKING QUANTITY : 5000 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY



3. 引出し方向
USER DIRECTION OF FEED

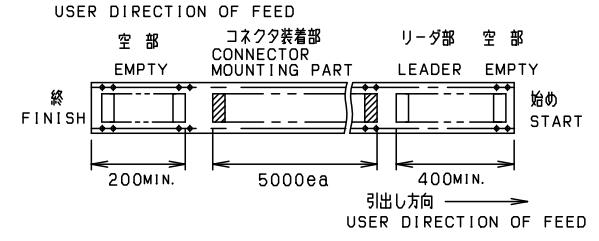

4. 型番
P/N

24 5806 XXX 112 829 +

極数
NO. OF POS.
バリエーション
VARIATION
1: INSULATOR STRENGTH
UP TYPE,
WITHOUT VACUUM ITEM
バリエーション
VARIATION
1: INSULATOR WIDE TYPE
バリエーション
VARIATION

	ANCHOR PLATE	BOSS
2	◎	-

◎: WITH
-: WITHOUT

※この注記の1~3は2ページ目にのみ適用
※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-2 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2 10 ≤ X < 30 ±0.25 30 ≤ X ±0.3		UNIT mm		ANGLE 3RD		REFER TO SHEET 1/2			
ANGLE / 角度 ±3°		SCALE 3 : 1		DATE 2013/06/14		NO. EDN/DCN		DATE	ISSUE
DRAWN K. YAMANE		DESIGNED K. YAMANE		CHECKED		APPROVED T. MORI		PART NAME / 品名	
								SERIES 5806 EMBOSS TAPE ASSY	
								REC. ASSY ST SMT H=0.6	
								PART NO. / 製番	
								24 5806 XXX 112 829 +	
								DWG NO. / 図番	
								BJS 5806014	
								SHEET/REV	
								2/2 E	



KYOCERA Corporation