

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	LCP		COLOR: BLACK
2	CONTACT		N	COPPER ALLOY		Au
3	ANCHOR PLATE		2	COPPER ALLOY		Sn-Cu

極数 NO. OF POS.	A	B	C	D	E
10	1.6	3.76	4.6	3.2	
12	2.0	4.16	5.0	3.6	
14	2.4	4.56	5.4	4.0	
16	2.8	4.96	5.8	4.4	
18	3.2	5.36	6.2	4.8	
20	3.6	5.76	6.6	5.2	
22	4.0	6.16	7.0	5.6	
24	4.4	6.56	7.4	6.0	
26	4.8	6.96	7.8	6.4	
30	5.6	7.76	8.6	7.2	
32	6.0	8.16	9.0	7.6	
34	6.4	8.56	9.4	8.0	
36	6.8	8.96	9.8	8.4	
40	7.6	9.76	10.6	9.2	
44	8.4	10.56	11.4	10.0	
50	9.6	11.76	12.6	11.2	
54	10.4	12.56	13.4	12.0	
60	11.6	13.76	14.6	13.2	

※この表は1ページ目のみ適用
※THIS CHART IS APPLICABLE TO SHEET-1 ONLY.

注 記
NOTE

① テール及び金具底面の相互の輪郭度は、0.08MAX.
COPLANARITY OF CONTACT TAIL AND
ANCHOR PLATE IS 0.08MAX..





② 図示の位置に LOT NO. を刻印する。(レーザー)
LOT NO. SHALL BE MARKED
AT THE SPECIFIED POSITION. (LASER)

a) 24P~
K 3 01 S
工場コード
製造日 1, 2, ~29, 30, 31.
製造月 1, 2, ~9, X, Y, Z.
「K」表示(固定)

b) ~22P
K n S
工場コード
製造週
「K」表示(固定)



※この注記は1ページ目のみ適用
※THIS NOTES IS APPLICABLE TO SHEET-1 ONLY.

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		J	DCN-831	2017/08/23			
X <10 ±0.2 10≤ X <30 ±0.25 30≤ X ±0.3		UNIT mm	ANGLE 3RD	H	DCN-098	2017/01/19	Y. TSURUOKA	A. TSUNEMURA	K. YAMANE
				O	EDN-615	2011/08/18	T. SASAKI		T. FUJII
ANGLE / 角度 ±3°		SCALE NTS	DATE 2011/08/18	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
		PART NAME / 品名 SERIES 5807 PLUG ASSY 0.4mm PITCH BOARD TO BOARD H=0.7							
DRAWN T. SASAKI	DESIGNED T. SASAKI	CHECKED	APPROVED T. FUJII	PART NO. / 製番 14 5807 XXX 002 829 +					
KYOCERA Corporation				DWG NO. / 図番 BJS 5807003				SHEET/REV 1/2 J	

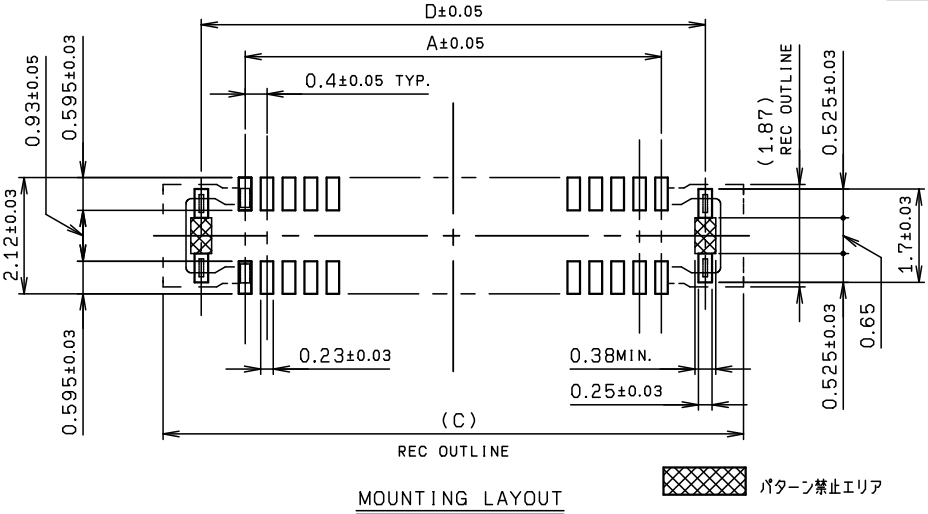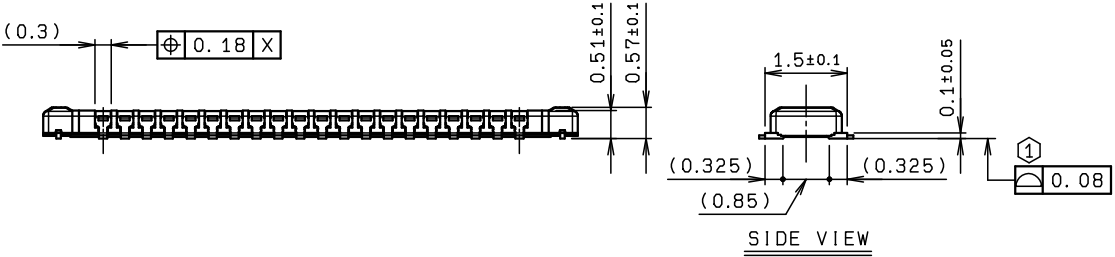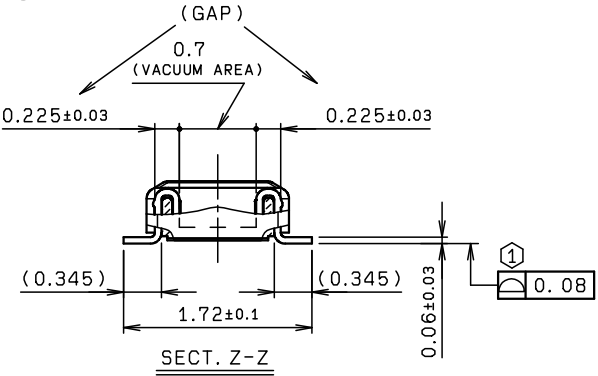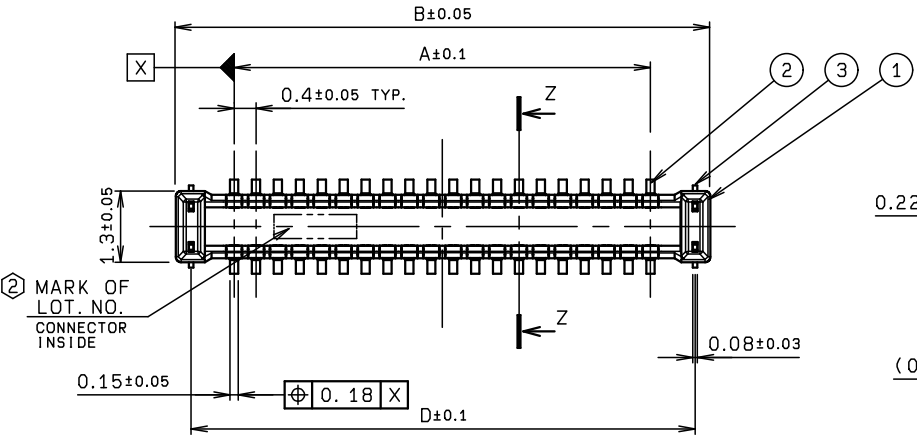

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	14 5807 XXX 002 829 +	5000			10 5807 XXX 002 829 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	PET		
4	REEL		1	POLYSTYRENE		

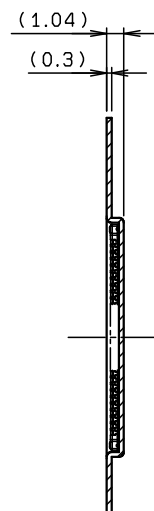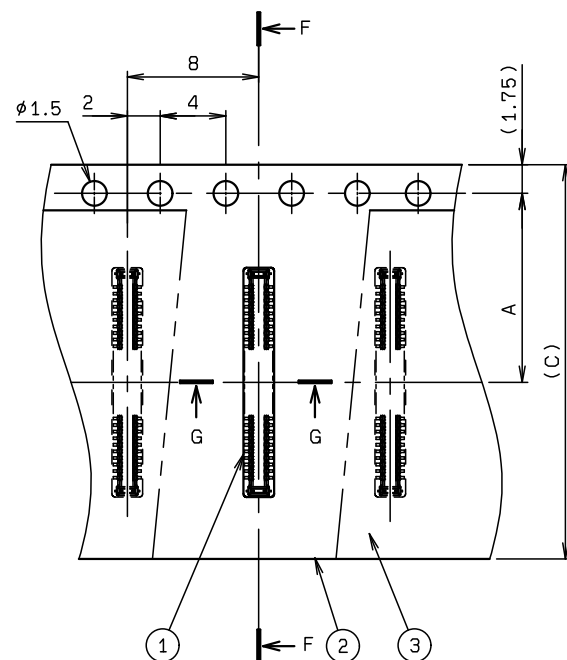

SECT. F-F


極数 NO. OF POS.	A	B	C	D
10	5.5	-	12.0	18.4
12	5.5	-	12.0	18.4
14	7.5	-	16.0	22.4
16	7.5	-	16.0	22.4
18	7.5	-	16.0	22.4
20	7.5	-	16.0	22.4
22	7.5	-	16.0	22.4
24	7.5	-	16.0	22.4
26	7.5	-	16.0	22.4
30	7.5	-	16.0	22.4
32	7.5	-	16.0	22.4
34	11.5	-	24.0	30.4
36	11.5	-	24.0	30.4
40	11.5	-	24.0	30.4
44	11.5	-	24.0	30.4
50	11.5	-	24.0	30.4
54	11.5	-	24.0	30.4
60	11.5	-	24.0	30.4

※この表は2ページ目のみ適用
※THIS CHART IS APPLICABLE TO
SHEET-2 ONLY.


注 記
NOTE

1. 梱包数量 : 5000個/リール
PACKING QUANTITY : 5000 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY



3. 引出し方向
USER DIRECTION OF FEED

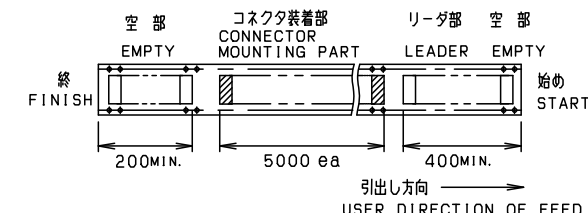


4. 型番
P/N 14 5807 XXX 002 829 +


極数 NO. OF POS.	
バリエーション VARIATION	
0:WITHOUT VACUUM ITEM	
バリエーション VARIATION	
ANCHOR PLATE	BOSS
2	-
	◎:WITH -:WITHOUT

※この注記の1~3は2ページ目のみ適用
※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-2 ONLY.


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS



SECT. G-G (S=8:1)

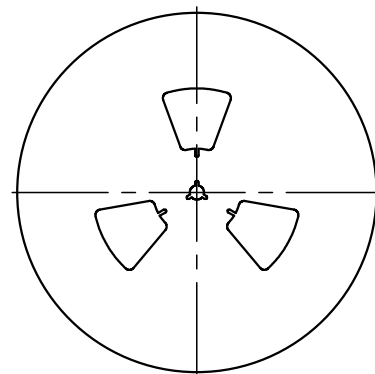

REEL DIMENSION (S=1:5)

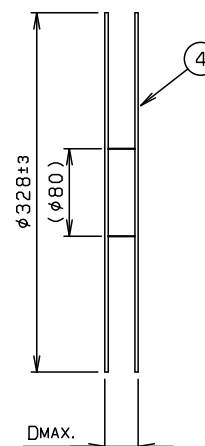

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格					
X < 10 ±0.2		UNIT		REFER TO SHEET 1/2			
10 ≤ X < 30 ±0.25		mm		NO. EDN/DCN DATE ISSUE CHECKED APPROVED			
30 ≤ X ±0.3		3RD		PART NAME / 品名			
ANGLE / 角度		SCALE		SERIES 5807 EMBOSS TAPE ASSY			
±3°		DATE		PLUG ASSY ST SMT WITH ANCHOR PLATE H=0.7			
DRAWN		CHECKED		PART NO. / 型番			
T. SASAKI		APPROVED		14 5807 XXX 002 829 +			
DESIGNED		T. FUJII		DWG NO. / 図番			
T. SASAKI				BJS 5807003			
KYOCERA		KYOCERA Corporation		SHEET/REV			
				2/2 J			