


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	LCP		COLOR: BLACK
2	CONTACT		N	COPPER ALLOY		Au
3	ANCHOR PLATE		2	COPPER ALLOY		Sn-Cu

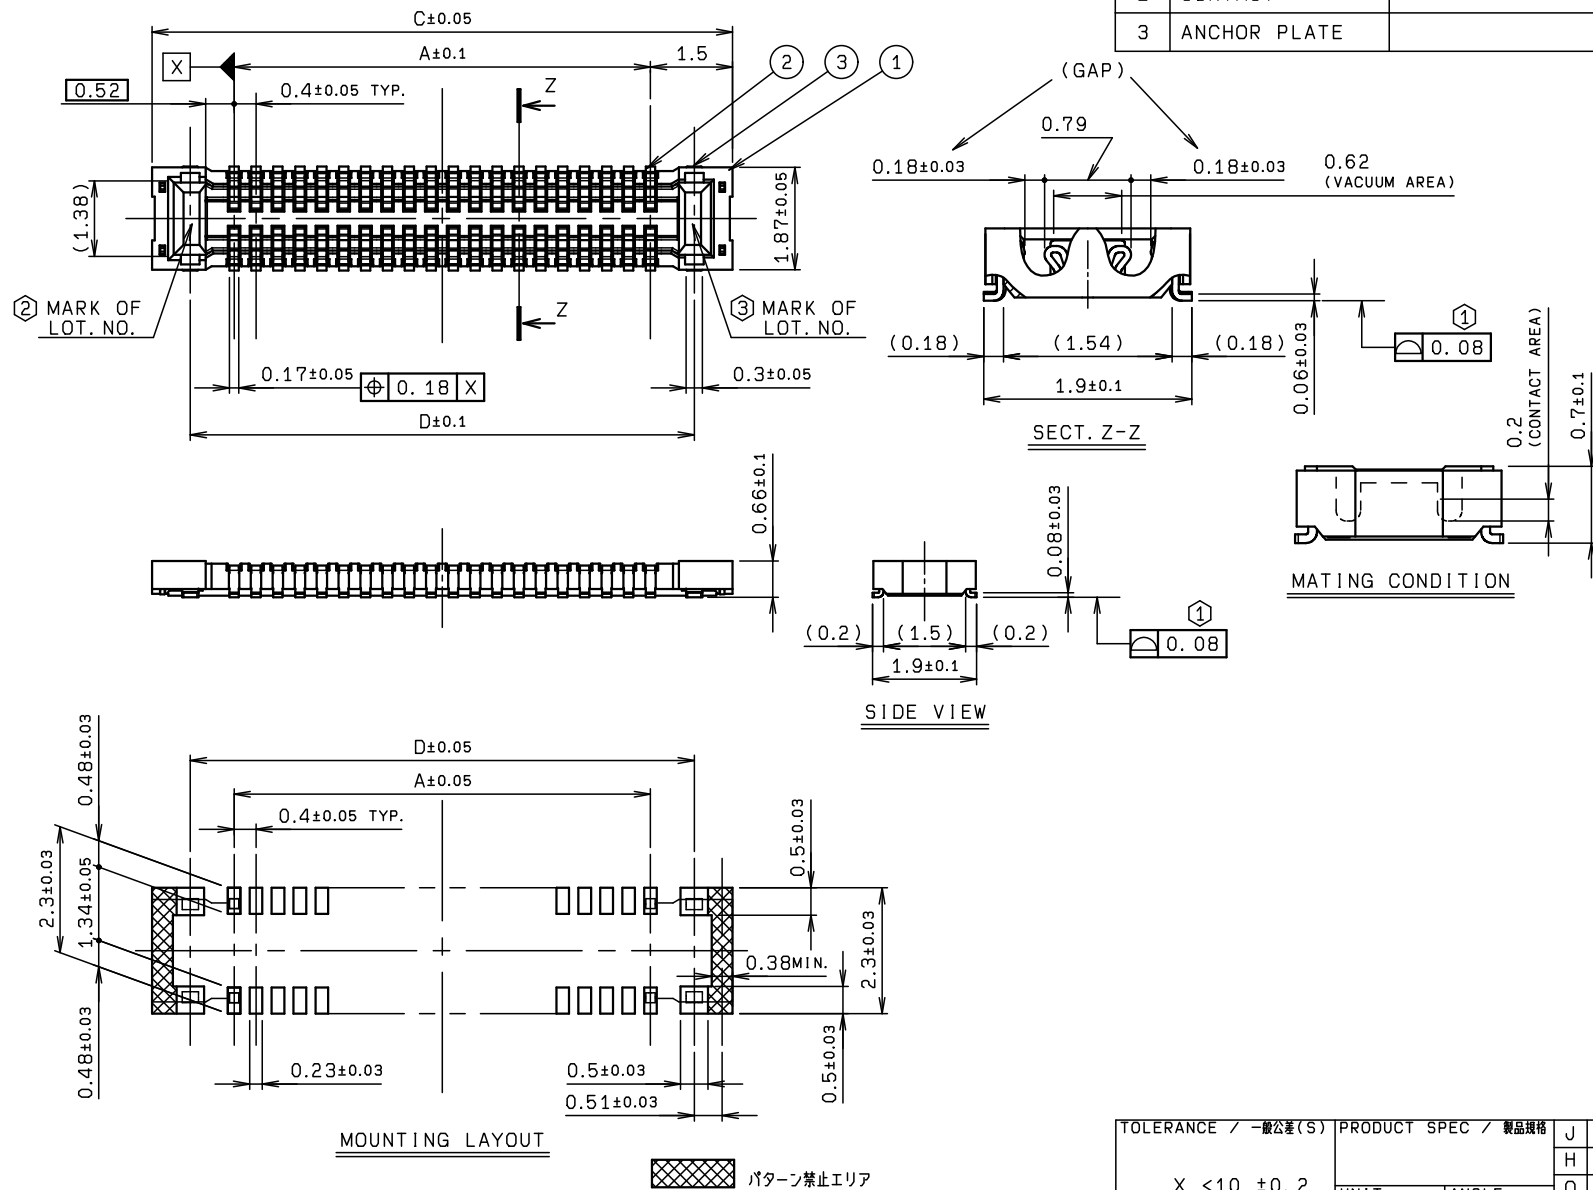


極数 NO. OF POS.	A	B	C	D	E
10	1.6		4.6	3.2	
12	2.0		5.0	3.6	
14	2.4		5.4	4.0	
16	2.8		5.8	4.4	
18	3.2		6.2	4.8	
20	3.6		6.6	5.2	
22	4.0		7.0	5.6	
24	4.4		7.4	6.0	
26	4.8		7.8	6.4	
30	5.6		8.6	7.2	
32	6.0		9.0	7.6	
34	6.4		9.4	8.0	
36	6.8		9.8	8.4	
40	7.6		10.6	9.2	
44	8.4		11.4	10.0	
50	9.6		12.6	11.2	
54	10.4		13.4	12.0	
60	11.6		14.6	13.2	

※この表は1ページ目にのみ適用
※THIS CHART IS APPLICABLE TO SHEET-1 ONLY.

注 記
NOTE

- (1) テール及び金具底面の相互の輪郭度は、 0.08MAX. .
COPLANARITY OF CONTACT TAIL AND ANCHOR PLATE IS 0.08MAX. .
- (2) 図示の位置に LOT NO. を刻印する。(レーザー)
LOT NO. SHALL BE MARKED AT THE SPECIFIED POSITION. (LASER)

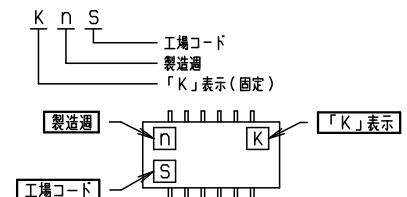

※この注記は1ページ目にのみ適用
※THIS NOTES IS APPLICABLE TO SHEET-1 ONLY.


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		J	DCN-831	2017/08/23			
X < 10 ± 0.2		UNIT		H	DCN-09B	2017/01/19	Y. TSURUOKA	A. TSUNEMURA	K. YAMANE
10 ≤ X < 30 ± 0.25		mm		O	EDN-615	2011/08/18	T. SASAKI		T. FUJII
30 ≤ X ± 0.3		ANGLE		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ± 3°		SCALE		PART NAME / 品名					
		NTS		SERIES 5807 REC ASSY					
DRAWN T. SASAKI		DESIGNED T. SASAKI		0.4mm PITCH BOARD TO BOARD H=0.7					
CHECKED		APPROVED T. FUJII		PART NO. / 製番					
				24 5807 XXX 002 829 +					
				DWG NO. / 図番					
				BJS 5807004					
				SHEET/REV					
				1/2 J					


KYOCERA

KYOCERA Corporation


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	24 5807 XXX 002 829 +	5000			20 5807 XXX 002 829 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	PET		
4	REEL		1	POLYSTYRENE		

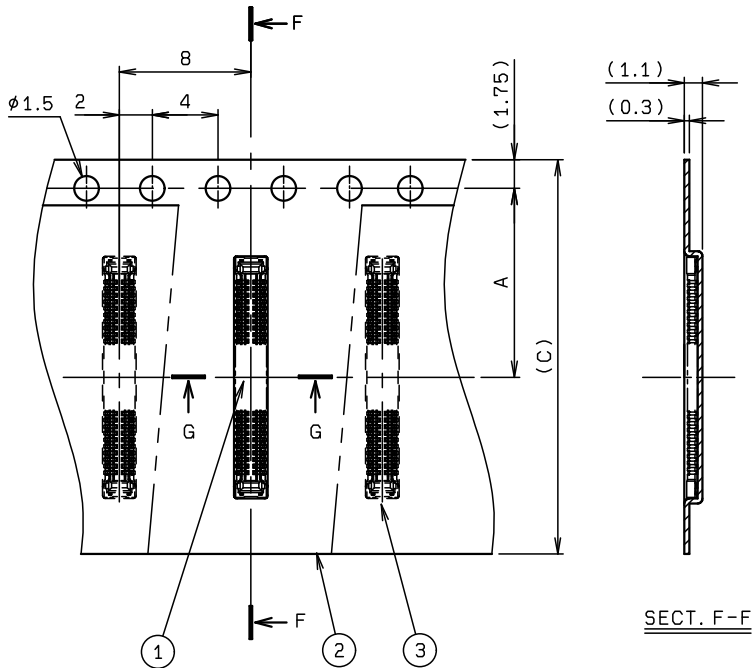

SECT. F-F



SECT. G-G (S=8:1)

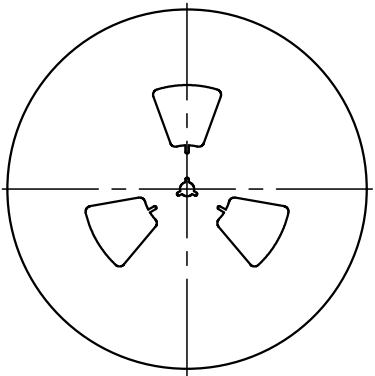

REEL DIMENSION (S=1:5)


極数 NO. OF POS.	A	B	C	D
10	5.5	-	12.0	18.4
12	5.5	-	12.0	18.4
14	7.5	-	16.0	22.4
16	7.5	-	16.0	22.4
18	7.5	-	16.0	22.4
20	7.5	-	16.0	22.4
22	7.5	-	16.0	22.4
24	7.5	-	16.0	22.4
26	7.5	-	16.0	22.4
30	7.5	-	16.0	22.4
32	7.5	-	16.0	22.4
34	11.5	-	24.0	30.4
36	11.5	-	24.0	30.4
40	11.5	-	24.0	30.4
44	11.5	-	24.0	30.4
50	11.5	-	24.0	30.4
54	11.5	-	24.0	30.4
60	11.5	-	24.0	30.4

※この表は2ページ目のみ適用
※THIS CHART IS APPLICABLE TO
SHEET-2 ONLY.


注 記
NOTE

1. 梱包数量 : 5000個/リール
PACKING QUANTITY : 5000 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY



3. 引出し方向
USER DIRECTION OF FEED

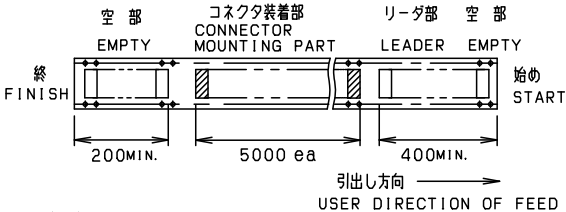

4. 型番
P/N 24 5807 XXX 002 829 +

極数 NO. OF POS.	24	5807	XXX	002	829	+
バリエーション VARIATION						
バリエーション VARIATION						
ANCHOR PLATE	2	◎				
BOSS						

※この注記の1～3は2ページ目のみ適用
※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-2 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2		UNIT		ANGLE		REFER TO SHEET		1/2	
10 ≤ X < 30 ±0.25		mm		3RD		NO.		EDN/DCN	
30 ≤ X ±0.3		SCALE		DATE		DATE		ISSUE	
ANGLE / 角度 ±3°		3 : 1		2011/08/18		PART NAME / 品名		CHECKED	
DRAWN T. SASAKI		DESIGNED T. SASAKI		CHECKED		APPROVED T. FUJII		PART NO. / 型番	
								24 5807 XXX 002 829 +	
								DWG NO. / 図番	
								BJS 5807004	
								SHEET/REV	
								2/2	