
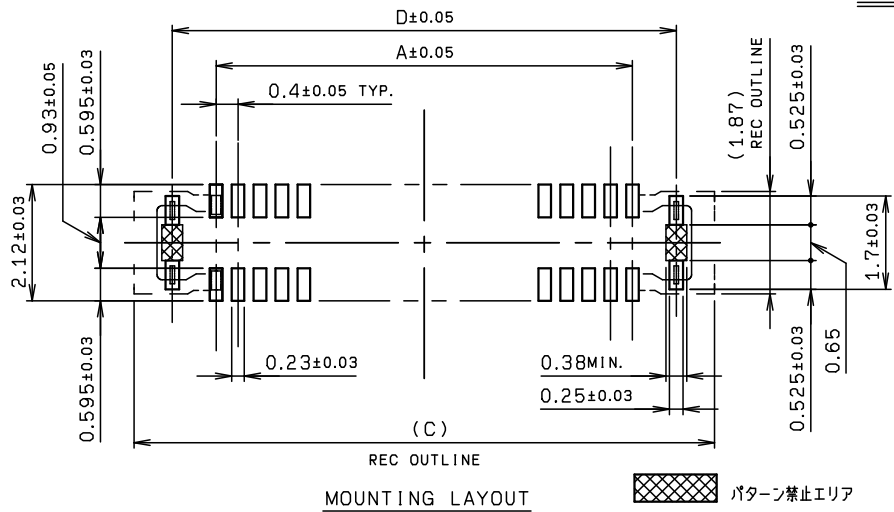
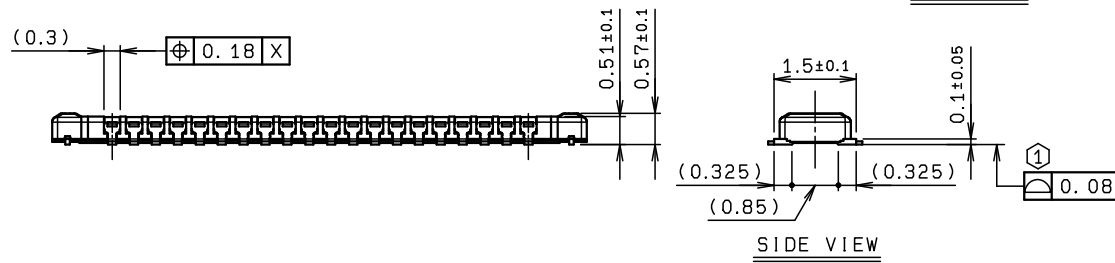
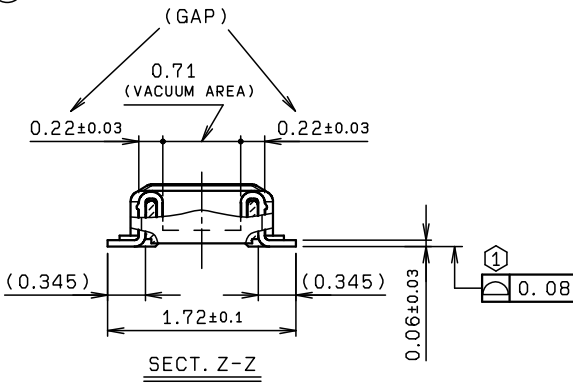


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	LCP		COLOR: BLACK
2	CONTACT		N	COPPER ALLOY		Au
3	ANCHOR PLATE		2	COPPER ALLOY		Sn-Cu

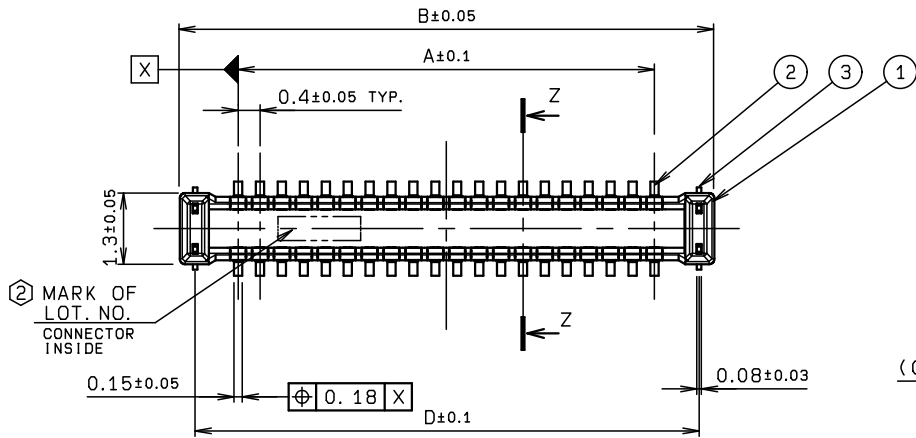

極数 NO. OF POS.	A	B	C	D	E
10	1.6	3.76	4.6	3.2	
12	2.0	4.16	5.0	3.6	
14	2.4	4.56	5.4	4.0	
16	2.8	4.96	5.8	4.4	
18	3.2	5.36	6.2	4.8	
20	3.6	5.76	6.6	5.2	
22	4.0	6.16	7.0	5.6	
24	4.4	6.56	7.4	6.0	
26	4.8	6.96	7.8	6.4	
30	5.6	7.76	8.6	7.2	
32	6.0	8.16	9.0	7.6	
34	6.4	8.56	9.4	8.0	
36	6.8	8.96	9.8	8.4	
40	7.6	9.76	10.6	9.2	
44	8.4	10.56	11.4	10.0	
50	9.6	11.76	12.6	11.2	
54	10.4	12.56	13.4	12.0	
60	11.6	13.76	14.6	13.2	

※この表は1ページ目にのみ適用
※THIS CHART IS APPLICABLE TO SHEET-1 ONLY.



注記
NOTE
① テール及び金具底面の相互の輪郭度は、0.08MAX.
COPLANARITY OF CONTACT TAIL AND
ANCHOR PLATE IS 0.08MAX..
② 図示の位置に LOT NO. を刻印する。(レーザー)
LOT NO. SHALL BE MARKED
AT THE SPECIFIED POSITION. (LASER)
a) 24P~ K 3 01 S
工場コード
製造日 1, 2, ~29, 30, 31.
製造月 1, 2, ~9, X, Y, Z.
「K」表示(固定)
b) ~22P K n S
工場コード
製造週
「K」表示(固定)

※この注記は1ページ目にのみ適用
※THIS NOTES IS APPLICABLE TO SHEET-1 ONLY.


TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		C	DCN-831	2017/08/23			
X < 10 ±0.2		UNIT		B	DCN-848	2015/07/27	E. KOIKE	T. SUGIKI	K. YAMANE
10 ≤ X < 30 ±0.25		mm		O	EDN-002	2015/01/05	T. SUGIKI		K. YAMANE
30 ≤ X ±0.3		ANGLE 3RD		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE NTS		PART NAME / 品名					
DRAWN M. TAKAHASHI		DESIGNED T. SUGIKI		SERIES 5807 PLUG ASSY					
CHECKED		APPROVED K. YAMANE		0.4mm PITCH BOARD TO BOARD H=0.7					
				TYPE HIGH CLICK FEELING					
				PART NO. / 製番					
				14 5807 XXX 012 829 +					
				DWG NO. / 図番					
				BJS 5807030					
				SHEET/REV 1/2 C					

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	14 5807 XXX 012 829 +	5000			10 5807 XXX 012 829 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	PET		
4	REEL		1	POLYSTYRENE		

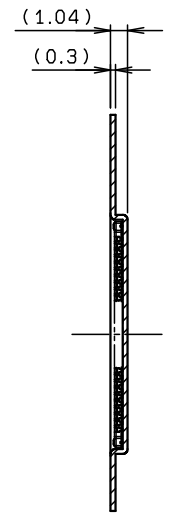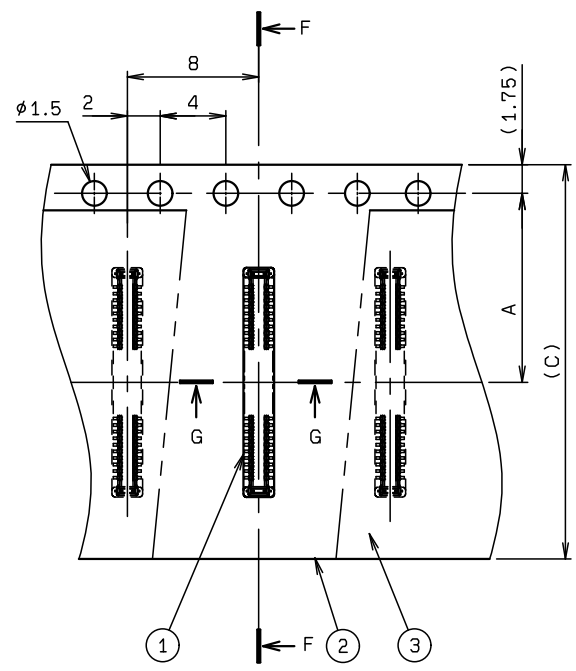


SECT. F-F

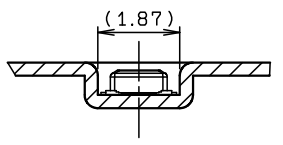

SECT. G-G (S=8:1)

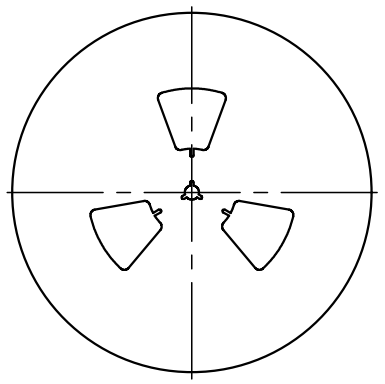

REEL DIMENSION (S=1:5)

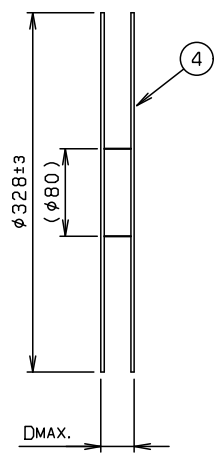


極数 NO. OF POS.	A	B	C	D
10	5.5	-	12.0	18.4
12	5.5	-	12.0	18.4
14	7.5	-	16.0	22.4
16	7.5	-	16.0	22.4
18	7.5	-	16.0	22.4
20	7.5	-	16.0	22.4
22	7.5	-	16.0	22.4
24	7.5	-	16.0	22.4
26	7.5	-	16.0	22.4
30	7.5	-	16.0	22.4
32	7.5	-	16.0	22.4
34	11.5	-	24.0	30.4
36	11.5	-	24.0	30.4
40	11.5	-	24.0	30.4
44	11.5	-	24.0	30.4
50	11.5	-	24.0	30.4
54	11.5	-	24.0	30.4
60	11.5	-	24.0	30.4

※この表は2ページ目のみ適用
※THIS CHART IS APPLICABLE TO SHEET-2 ONLY.


注 記
NOTE

1. 梱包数量 : 5000 個/リール
PACKING QUANTITY : 5000 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY



3. 引出し方向
USER DIRECTION OF FEED

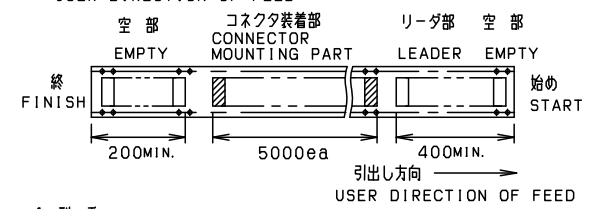

4. 型番
P/N 14 5807 XXX 012 829 +

極数
NO. OF POS.
バリエーション
VARIATION
0:WITHOUT VACUUM ITEM
バリエーション
VARIATION
1:高クリック感仕様
HIGH CLICK FEELING
バリエーション
VARIATION

	ANCHOR PLATE	BOSS
2	◎	-

◎:WITH
-:WITHOUT

※この注記の1~3は2ページ目のみ適用
※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-2 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格								
X <10 ±0.2 10 ≤ X <30 ±0.25 30 ≤ X ±0.3	UNIT mm		ANGLE 3RD	REFER TO SHEET 1/2						
	SCALE 3 : 1		DATE 2015/01/05	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED	
	ANGLE / 角度 ±3°			PART NAME / 品名 SERIES 5807 EMOSS TAPE ASSY PLUG ASSY ST SMT WITH ANCHOR PLATE H=0.7 TYPE HIGH CLICK FEELING						
DRAWN M. TAKAHASHI	DESIGNED T. SUGIKI	CHECKED	APPROVED K. YAMANE	PART NO. / 型番 14 5807 XXX 012 829 +					DWG NO. / 図番 BJS 5807030	
KYOCERA		KYOCERA Corporation							SHEET/REV 2/2 C	