



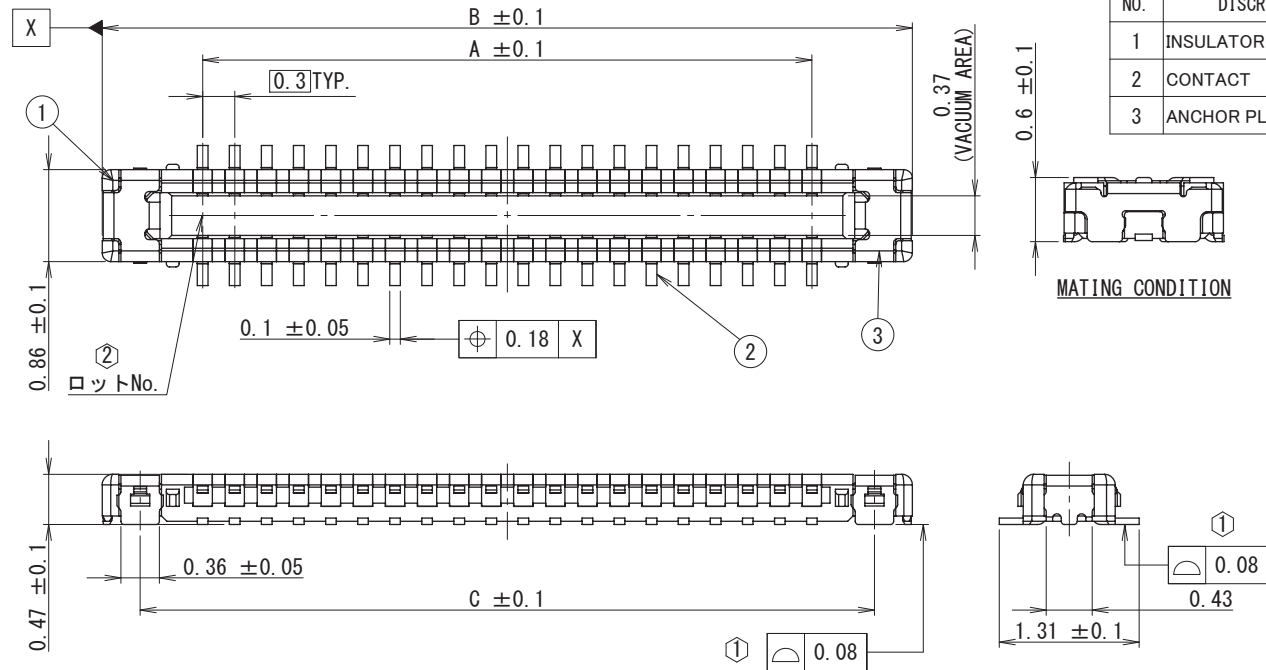

NO.	DISCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	LCP		COLOR:BLACK
2	CONTACT		N	COPPER ALLOY		Au, Be-Free
3	ANCHOR PLATE		2	COPPER ALLOY		Au, Be-Free

極數 No. OF POS.	A	B	C	D	E
10	1.2	3.08	2.37	3.74	3.0
12	1.5	3.38	2.67	4.04	3.3
14	1.8	3.68	2.97	4.34	3.6
16	2.1	3.98	3.27	4.64	3.9
18	2.4	4.28	3.57	4.94	4.2
20	2.7	4.58	3.87	5.24	4.5
22	3.0	4.88	4.17	5.54	4.8
24	3.3	5.18	4.47	5.84	5.1
26	3.6	5.48	4.77	6.14	5.4
28	3.9	5.78	5.07	6.44	5.7
30	4.2	6.08	5.37	6.74	6.0
32	4.5	6.38	5.67	7.04	6.3
34	4.8	6.68	5.97	7.34	6.6
36	5.1	6.98	6.27	7.64	6.9
38	5.4	7.28	6.57	7.94	7.2
40	5.7	7.58	6.87	8.24	7.5
42	6.0	7.88	7.17	8.54	7.8
44	6.3	8.18	7.47	8.84	8.1
46	6.6	8.48	7.77	9.14	8.4
48	6.9	8.78	8.07	9.44	8.7
50	7.2	9.08	8.37	9.74	9.0

電流 Current	パターン寸法G
3A通電時	1.27
5A通電時	2.70


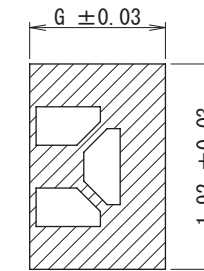


DETAIL "Y"
ANCHOR PLATE
PAD AREA

注記
NOTE

※この表は1ページ目にのみ適用
THIS CHART IS APPLICABLE TO SHEET-1 ONLY.




- ① コンタクトテール及び金具底面相互の輪郭度は初期0.08MAX.
COPLANARITY OF CONTACT TAIL AND ANCHOR PLATE IS 0.08MAX.
- ② 図示の位置にロットNo. を刻印する（レーザー）
LOT No. SHALL BE MARKED AT THE SPECIFIED POSITION. (LASER)

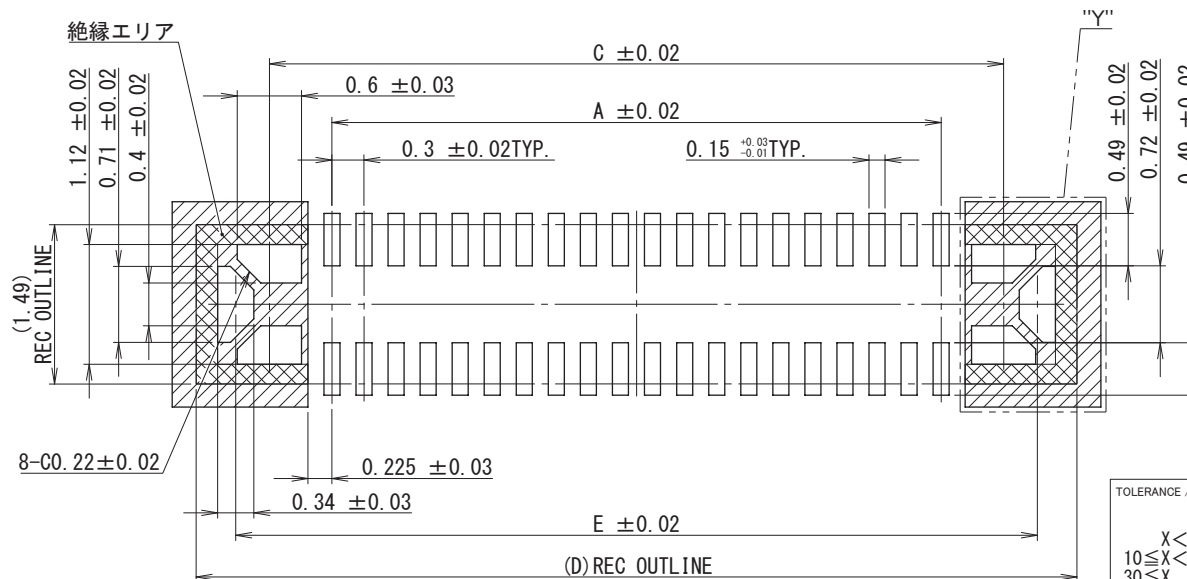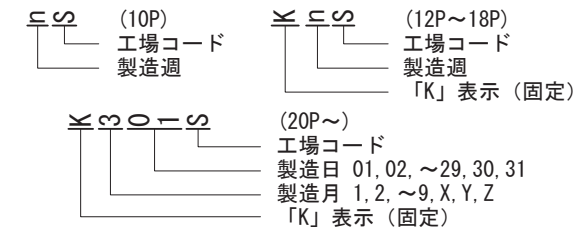

MOUNT LAYOUT


RoHS規制対応
COMPLIANT WITH
RoHS REGULATIONS

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		B	DCN24016	2024/01/16	H. WATANABE		S. HORINO
$\begin{matrix} X < 10 & \pm 0.2 \\ 10 \leq X < 30 & \pm 0.25 \\ 30 \leq X & \pm 0.3 \end{matrix}$		UNIT		A	DCN23224	2023/06/09	S. WU	H. WATANABE	S. HORINO
		ANGLE		0	EDN21245	2021/11/15	S. WU	H. WATANABE	S. HORINO
		mm		3RD		NO.	EDN/DCN	DATE	ISSUE
ANGLE / 角度		SCALE		PART NAME / 品名					
$\pm 3^{\circ}$		NTS		5814 PLUG ASSY ST SMT 0.3mm PITCH BOARD TO BOARD H=0.6 W=1.5					
DATE		DATE							
2021/11/15									
DRAWN	DESIGNED	CHECKED	APPROVED	PART NO. / 型番					
S. WU	S. WU	H. WATANABE	S. HORINO	14 5814 XXX 000 829 +					
				DWG NO. / 図番				SHEET	REV
				BJS 5814001				1/2	B

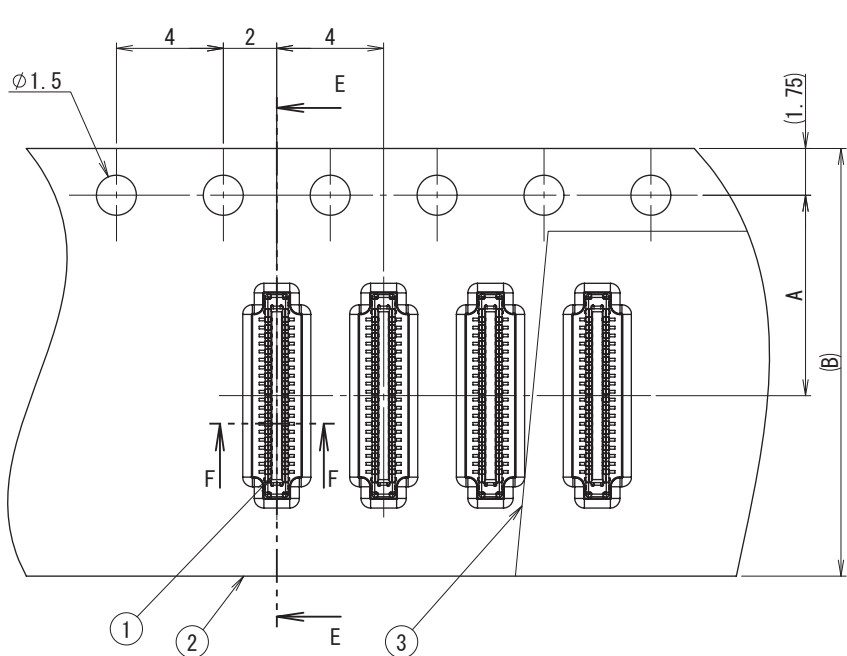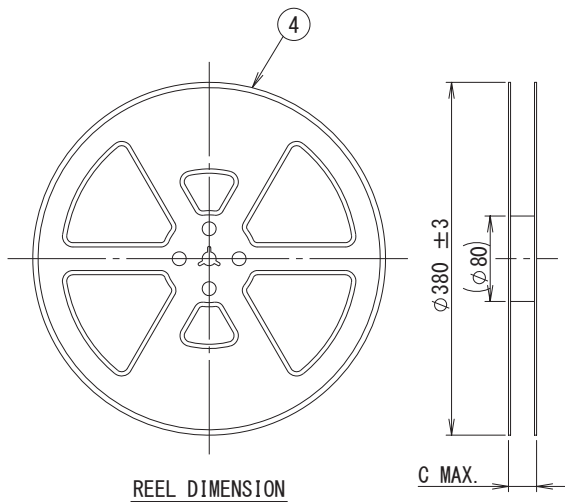SECT. F-F
(S=10 : 1)


RoHS規制対応
COMPLIANT WITH
RoHS REGULATIONS

REEL DIMENSION

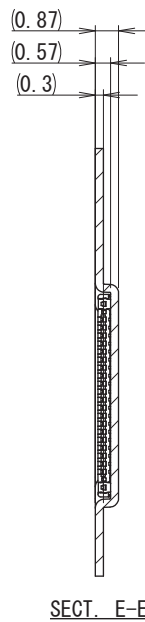

SECT. E-E

NO.	DISCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	14 5814 XXX 000 829+	15000			105814XXX000829+
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	PET		
4	REEL		1	POLYSTYRENE		

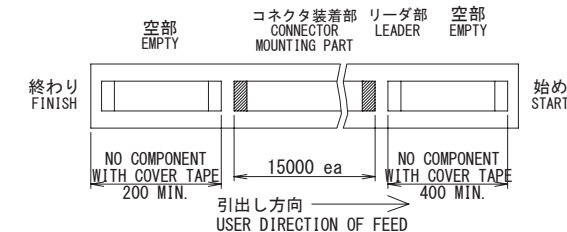注記
NOTE1. 梱包数量 : 15000 個/リール
PACKING QUANTITY : 15000 ea/reel2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY3. 引出し方向
USER DIRECTION OF FEED4. 型番
P/N 14 5814 XXX 000 829 +極数
NO. OF POS.

極数 No. OF POS.	A	B	C
10	5.5	12	18.4
12	5.5	12	18.4
14	7.5	16	22.4
16	7.5	16	22.4
18	7.5	16	22.4
20	7.5	16	22.4
22	7.5	16	22.4
24	7.5	16	22.4
26	7.5	16	22.4
28	7.5	16	22.4
30	7.5	16	22.4
32	7.5	16	22.4
34	7.5	16	22.4
36	7.5	16	22.4
38	7.5	16	22.4
40	7.5	16	22.4
42	11.5	24	30.4
44	11.5	24	30.4
46	11.5	24	30.4
48	11.5	24	30.4
50	11.5	24	30.4

※この表は2ページ目にも適用
THIS CHART IS APPLICABLE TO SHEET-2 ONLY.

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2 10 ≤ X < 30 ±0.25 30 ≤ X ±0.3		UNIT mm		ANGLE 3RD		REFER TO SHEET 1/2			
ANGLE / 角度 ±3°		SCALE 5:1		DATE 2021/11/15		NO.	EDN/DCN	DATE	ISSUE
DRAWN S. WU		DESIGNED S. WU		CHECKED H. WATANABE		PART NAME / 品名			
						5814 PLUG EMBOSS ASSY 0.3mm PITCH BOARD TO BOARD H=0.6 W=1.5			
						PART NO. / 型番			
						14 5814 XXX 000 829 +			
						DWG NO. / 図番			
						BJS 5814001			
						SHEET 2/2		REV B	

KYOCERA