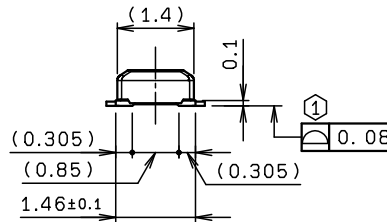
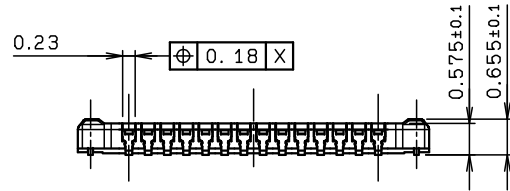
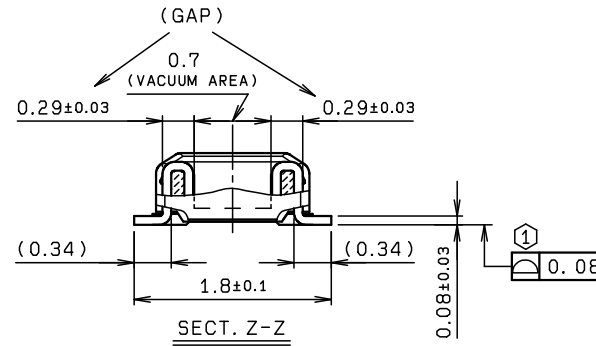
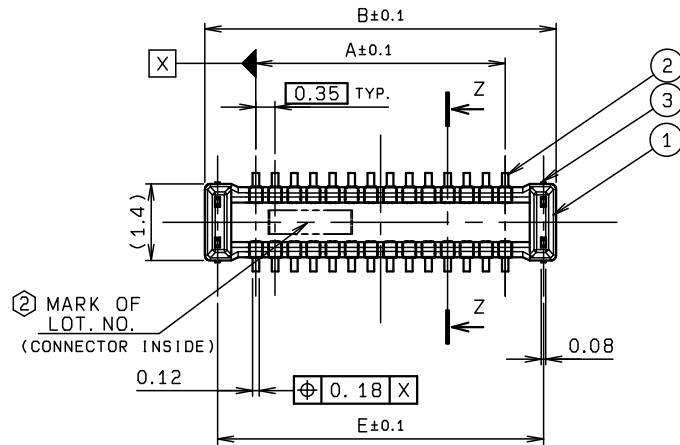


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	LCP		COLOR: BLACK
2	CONTACT		N	COPPER ALLOY		Au
3	ANCHOR PLATE		2	COPPER ALLOY		Sn-Cu

注 記
NOTE


- ① テール及び金具底面の相互の輪郭度は、0.08MAX.
COPLANARITY OF CONTACT TAIL
AND ANCHOR PLATE IS 0.08MAX.
- ② 図示の位置に LOT NO. を刻印する。(5桁、レーザー)
LOT NO. SHALL BE MARKED
AT THE SPECIFIED POSITION. (5 DIGIT. LASER)

- a) 24P~
- K 3 01 S
工場コード
製造日 1, 2, ~29, 30, 31.
製造月 1, 2, ~9, X, Y, Z.
「K」表示(固定)
- b) ~22P
- K n S
工場コード
製造週
「K」表示(固定)

※この注記は1ページ目へのみ適用
※THIS NOTES ARE APPLICABLE TO
SHEET-1 ONLY.

極数 NO. OF POS.	A	B	C	D	E
10	1.40	3.26	4.00		2.80
12	1.75	3.61	4.35		3.15
14	2.10	3.96	4.70		3.50
16	2.45	4.31	5.05		3.85
18	2.80	4.66	5.40		4.20
20	3.15	5.01	5.75		4.55
22	3.50	5.36	6.10		4.90
24	3.85	5.71	6.45		5.25
26	4.20	6.06	6.80		5.60
28	4.55	6.41	7.15		5.95
30	4.90	6.76	7.50		6.30
32	5.25	7.11	7.85		6.65
34	5.60	7.46	8.20		7.00
36	5.95	7.81	8.55		7.35
38	6.30	8.16	8.90		7.70
40	6.65	8.51	9.25		8.05
42	7.00	8.86	9.60		8.40
44	7.35	9.21	9.95		8.75
46	7.70	9.56	10.30		9.10
48	8.05	9.91	10.65		9.45
50	8.40	10.26	11.00		9.80
52	8.75	10.61	11.35		10.15
54	9.10	10.96	11.70		10.50
56	9.45	11.31	12.05		10.85
58	9.80	11.66	12.40		11.20
60	10.15	12.01	12.75		11.55
64	10.85	12.71	13.45		12.25

※この表は1ページ目へのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 ONLY.

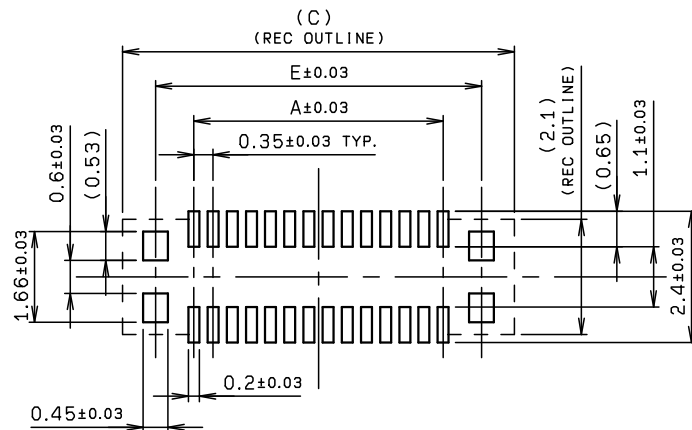


MOUNTING LAYOUT


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		M	DCN19433	2019/06/12	K. AZUMA	H. WATANABE	A. TSUNEMURA
X < 10 ±0.2		UNIT		L	DCN18259	2018/03/29	K. SHIOBARA	H. WATANABE	A. TSUNEMURA
10 ≤ X < 30 ±0.25		mm		O	EDN-233	2012/03/22	K. HIRATA		T. FUJII
30 ≤ X ±0.3		ANGLE		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度		3RD		PART NAME / 品名					
±3°		SCALE		SERIES 5843 PLUG ASSY					
DRAWN		DATE		0.35mm PITCH BOARD TO BOARD H=0.8					
K. HIRATA		2012/03/22							
DESIGNED		NTS		PART NO. / 製番					
K. HIRATA		CHECKED		14 5843 XXX 022 829 +					
		APPROVED		DWG NO. / 図番					
				BJS 5843005					
				SHEET/REV					
				1/2 M					


KYOCERA

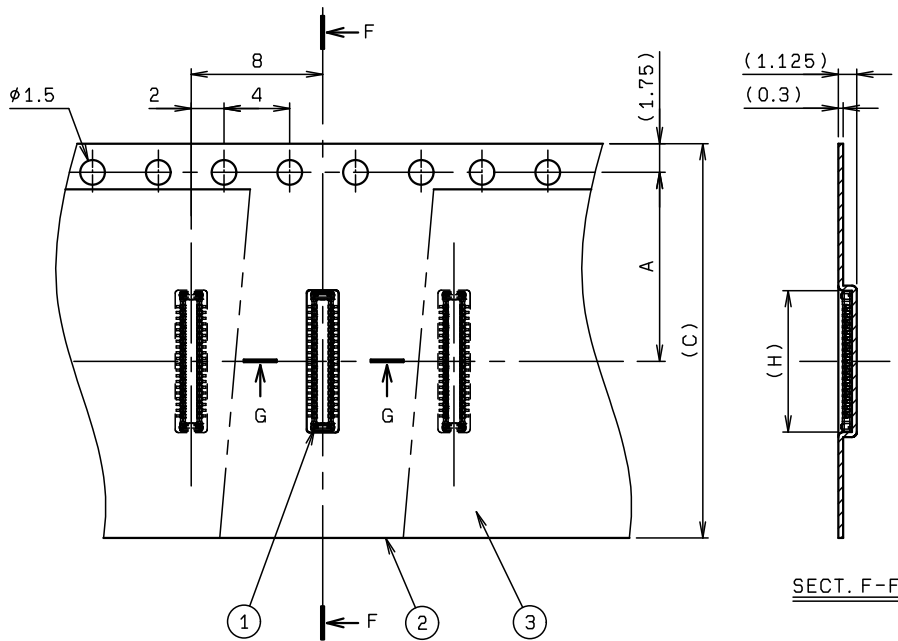


SECT. F-F

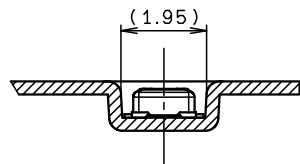

SECT. G-G (S=8:1)

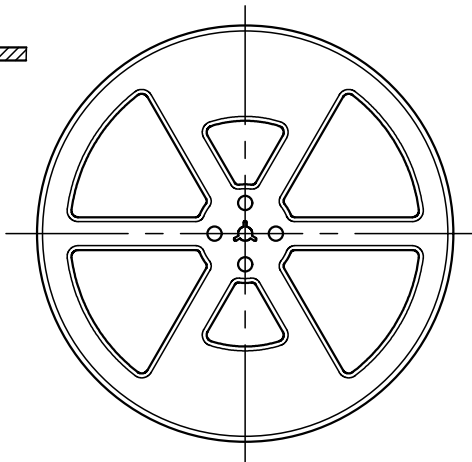

REEL DIMENSION (S=1:5)

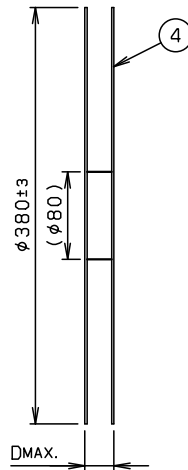


D MAX.

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	14 5843 XXX 022 829 +	5000			10 5843 XXX 022 829 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	PET		
4	REEL		1	POLYSTYRENE		


極数 NO. OF POS.	A	B	C	D	H
10	7.5	-	16.0	22.4	3.36
12	7.5	-	16.0	22.4	3.71
14	7.5	-	16.0	22.4	4.06
16	7.5	-	16.0	22.4	4.41
18	7.5	-	16.0	22.4	4.76
20	7.5	-	16.0	22.4	5.11
22	7.5	-	16.0	22.4	5.46
24	7.5	-	16.0	22.4	5.81
26	7.5	-	16.0	22.4	6.16
28	7.5	-	16.0	22.4	6.51
30	11.5	-	24.0	30.4	6.86
32	11.5	-	24.0	30.4	7.21
34	11.5	-	24.0	30.4	7.56
36	11.5	-	24.0	30.4	7.91
38	11.5	-	24.0	30.4	8.26
40	11.5	-	24.0	30.4	8.61
42	11.5	-	24.0	30.4	8.96
44	11.5	-	24.0	30.4	9.31
46	11.5	-	24.0	30.4	9.66
48	11.5	-	24.0	30.4	10.01
50	11.5	-	24.0	30.4	10.36
52	11.5	-	24.0	30.4	10.71
54	11.5	-	24.0	30.4	11.06
56	11.5	-	24.0	30.4	11.41
58	11.5	-	24.0	30.4	11.76
60	11.5	-	24.0	30.4	12.11
64	11.5	-	24.0	30.4	12.81

※この表は2ページ目にお適用

※THIS CHART IS APPLICABLE TO
SHEET-2 ONLY.注 記
NOTE1. 梱包数量 : 5000 個/リール
PACKING QUANTITY : 5000 ea/reel2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

3. 引出し方向

USER DIRECTION OF FEED

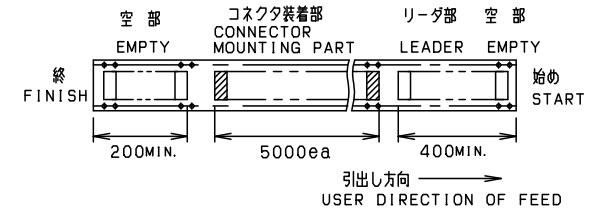4. 型番
P/N

14 5843 XXX 022 829 +

極数
NO. OF POS.バリエーション
VARIATION

0: WITHOUT VACUUM ITEM

バリエーション
VARIATION

ANCHOR PLATE	BOSS	◎: WITH -: WITHOUT
2	◎	-

※この注記の1~3は2ページ目にお適用

※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-2 ONLY.

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
10 ≤ X < 30 30 ≤ X	X < 10 ±0.2	UNIT mm	ANGLE 3RD	REFER TO SHEET 1/2					
	X < 30 ±0.25			NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
	30 ≤ X ±0.3			PART NAME / 品名 SERIES 5843 EMBOSS TAPE ASSY PLUG ASSY ST SMT H=0.8					
ANGLE / 角度 ±3°		SCALE 3 : 1	DATE 2012/03/22	PART NO. / 型番 14 5843 XXX 022 829 +					
DRAWN K. HIRATA	DESIGNED K. HIRATA	CHECKED	APPROVED T. FUJII	DWG NO. / 図番 BJS 5843005					
KYOCERA				SHEET/REV 2/2 M					