

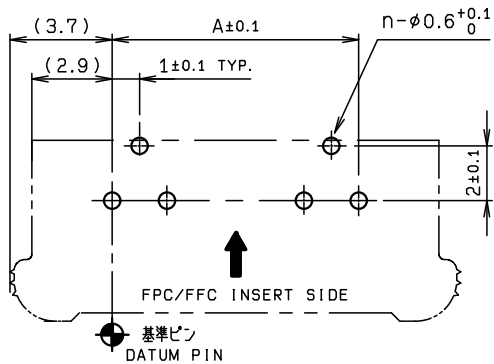
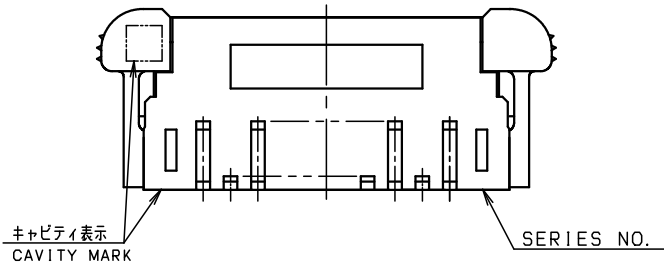
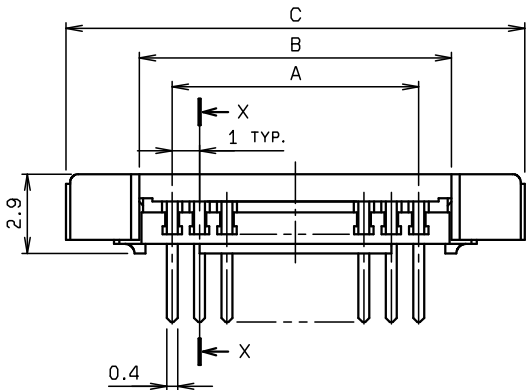



NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	PPS		UL94V-0
2	SLIDER		1	PPS		UL94V-0
3	CONTACT		N	PHOS-BRONZE		t=0.25 Sn-Pb:2μmmIN.

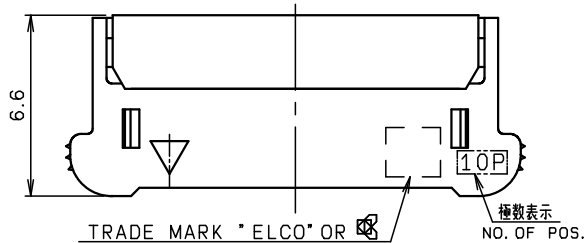

基板取り付け寸法
MOUNTING LAYOUT (t=1.2mmMAX.)

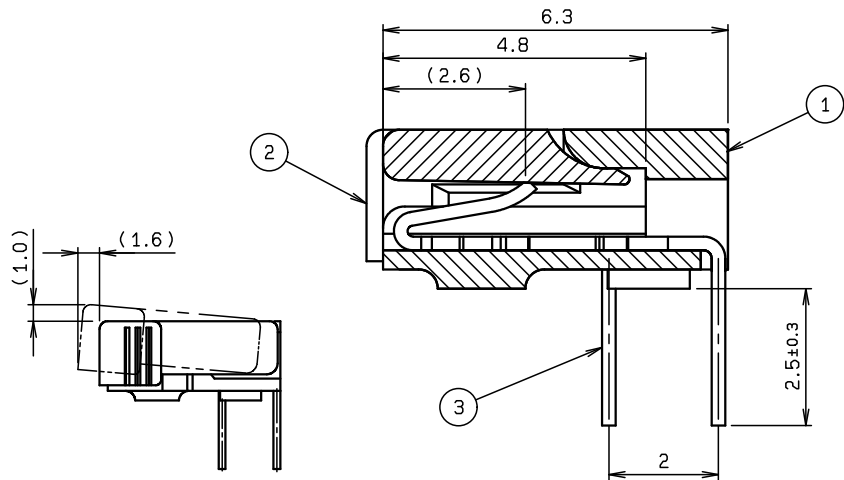

SECT. X-X (S=10/1)

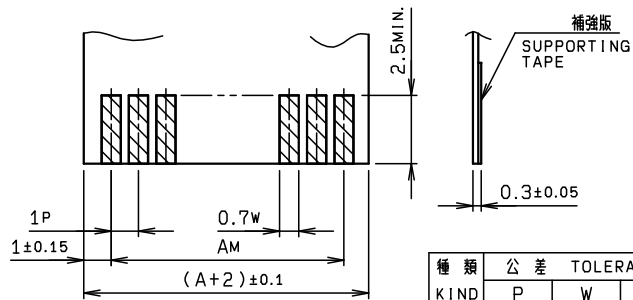

適用FPC/FFC
APPLICABLE FPC/FFC

種類 KIND	公差 TOLERANCE		
	P	W	M
FPC	±0.02	+0.07 -0.05	±0.05
FFC	±0.05	±0.03	±0.1

極数 NO. OF POS.	A	B	C
5	4.0	6.4	11.45
6	5.0	7.4	12.45
7	6.0	8.4	13.45
8	7.0	9.4	14.45
9	8.0	10.4	15.45
10	9.0	11.4	16.45
11	10.0	12.4	17.45
12	11.0	13.4	18.45
13	12.0	14.4	19.45
14	13.0	15.4	20.45
15	14.0	16.4	21.45
16	15.0	17.4	22.45
17	16.0	18.4	23.45
18	17.0	19.4	24.45
19	18.0	20.4	25.45
20	19.0	21.4	26.45
21	20.0	22.4	27.45
22	21.0	23.4	28.45
23	22.0	24.4	29.45
24	23.0	25.4	30.45
25	24.0	26.4	31.45
26	25.0	27.4	32.45
27	26.0	28.4	33.45
28	27.0	29.4	34.45
29	28.0	30.4	35.45
30	29.0	31.4	36.45

型番構成 P/N
X0 6200 XX7 012 800

SLIDER
0:OPEN
2:CLOSE

極数
NO OF POS.

REV. D127CAD7

MATERIAL / 材質		PRODUCT SPEC / 製品規格		J	DCN-115	2-14-08			
FINISH / 仕上げ		TOLERANCE / 一般公差		H	DCN-321	3-01-04	T. SATOH		N. HAYASHI
		±0.2		O	EDN-471	12-08-87	N. HAYASHI	R. KAMEOKA	S. SUZUKI
				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
				PART NAME / 品名					
UNIT		ANGLE	SCALE	DATE					
mm		3RD	5 : 1	12-07-92					
DRAWN		DESIGNED	CHECKED	APPROVED		PART NO. / 型番			
K. SUZUKI		N. HAYASHI		R. KAMEOKA		X0 6200 XX7 012 800			
						DWG NO. / 図番			
						BJS 6200016			
						SHEET/REV			
						1/1 J			

KYOCERA

KYOCERA Corporation

SHEET/REV

1/1 J