

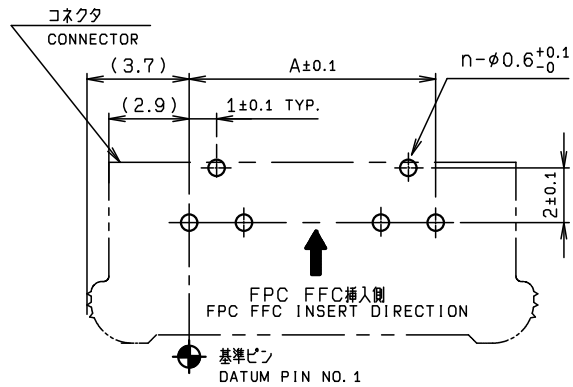
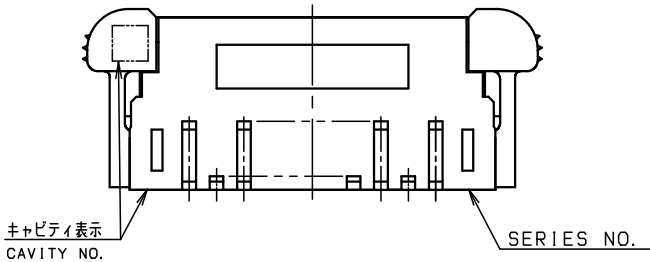
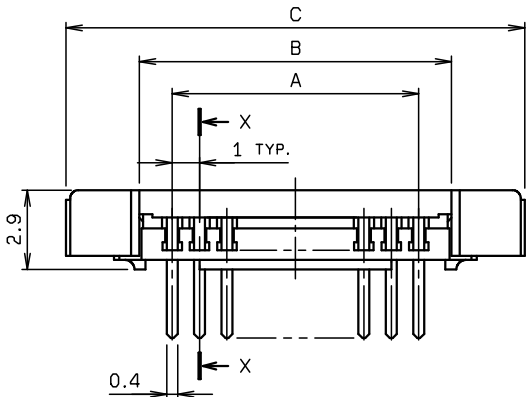
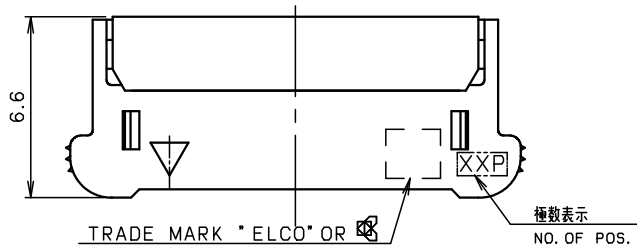



NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	PPS		UL94V-0
2	SLIDER		1	PPS		UL94V-0
3	CONTACT		N	PHOS-BRONZE		t=0.25 Sn-Cu:2μmmIN.

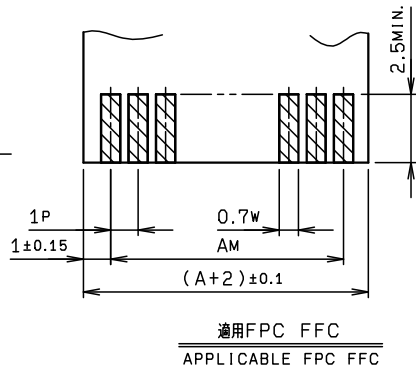

取付け基板寸法(コネクタ搭載側)
推奨基板厚(t=1.2mm以下)

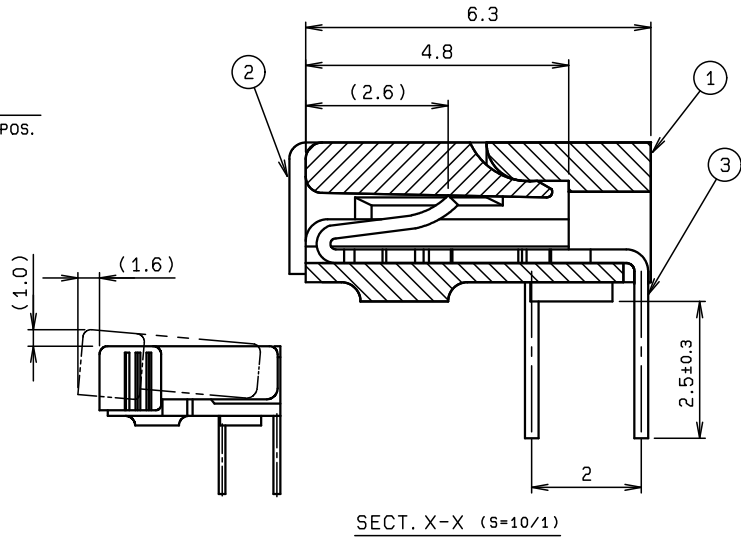

種類	公差 TOLERANCE		
KIND	P	W	M
FPC	±0.02	+0.07 -0.05	±0.05
FFC	±0.05	±0.03	±0.1

型番 00 6200 XX5 012 800 +
P/N

極数
NO. OF POS.

フラックス上がり防止剤処理済
FINISHED BY INHIBITOR TO
PREVENT FLUX FROM CREEPING UP.

極数 NO. OF POS.	A	B	C
5	4.0	6.4	11.45
6	5.0	7.4	12.45
7	6.0	8.4	13.45
8	7.0	9.4	14.45
9	8.0	10.4	15.45
10	9.0	11.4	16.45
11	10.0	12.4	17.45
12	11.0	13.4	18.45
13	12.0	14.4	19.45
14	13.0	15.4	20.45
15	14.0	16.4	21.45
16	15.0	17.4	22.45
17	16.0	18.4	23.45
18	17.0	19.4	24.45
19	18.0	20.4	25.45
20	19.0	21.4	26.45
21	20.0	22.4	27.45
22	21.0	23.4	28.45
23	22.0	24.4	29.45
24	23.0	25.4	30.45
25	24.0	26.4	31.45
26	25.0	27.4	32.45
27	26.0	28.4	33.45
28	27.0	29.4	34.45
29	28.0	30.4	35.45
30	29.0	31.4	36.45

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格					
X < 10 ±0.2				A DCN-115		2-14-08	
10 ≤ X < 30 ±0.25				O EDN-1550		11-28-05	
30 ≤ X ±0.3				NO. EDN/DCN		DATE	
ANGLE / 角度 ±3°		SCALE 5:1		DATE		11-28-05	
DRAWN T. KOMATSU		DESIGNED K. MURAKAMI		CHECKED A. HAGIWARA		APPROVED N. HAYASHI	
				PART NO. / 製番		00 6200 XX5 012 800 +	
				DWG NO. / 図番		BJS 6200143	
						SHEET/REV 1/1 A	

KYOCERA KYOCERA Corporation