




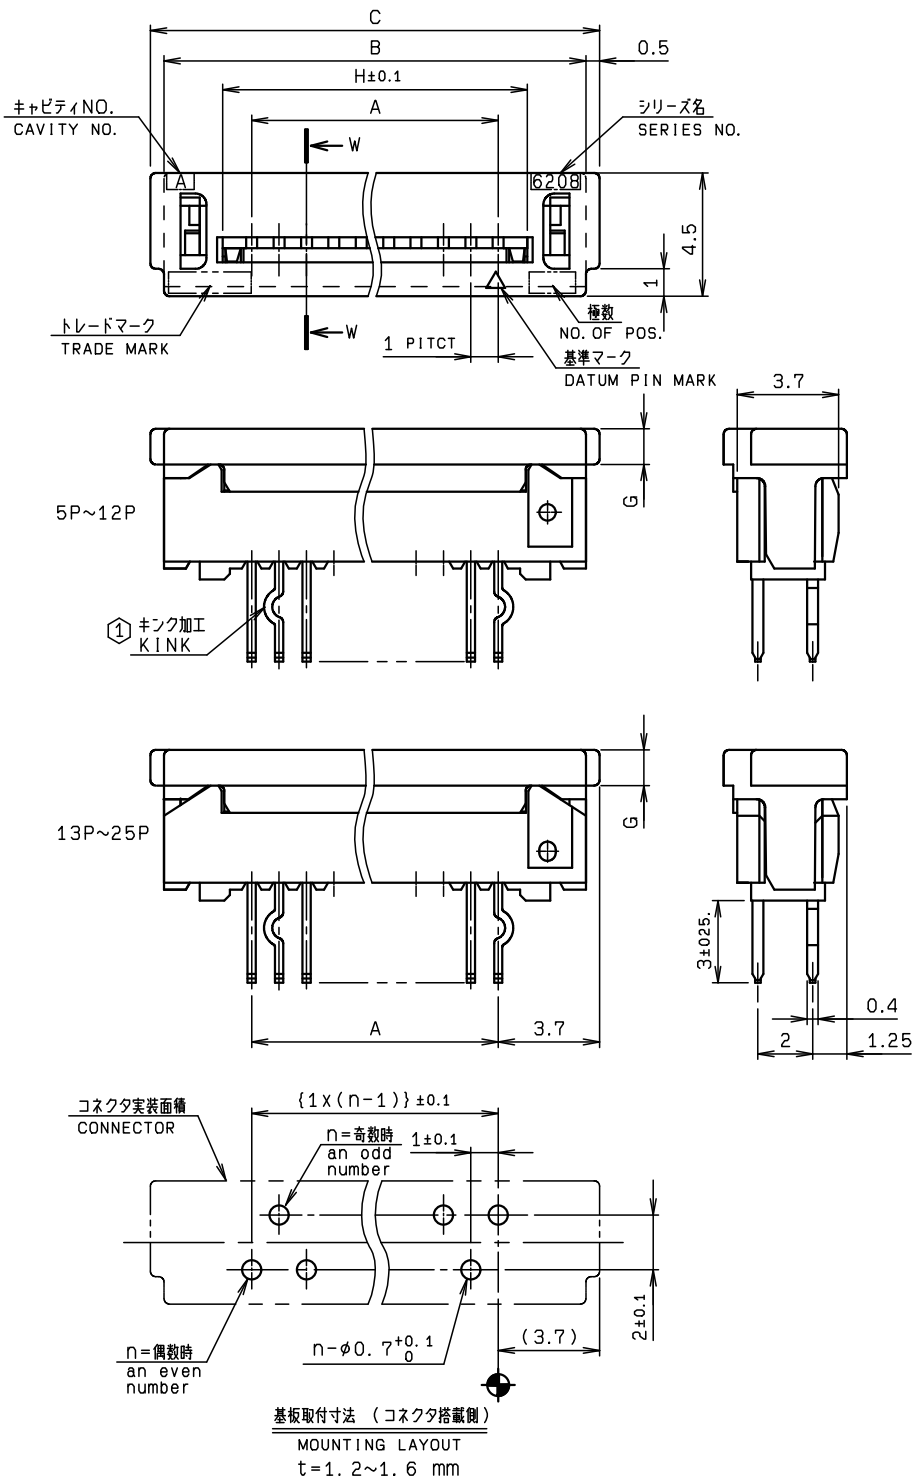

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	SLIDER		1	PPS		UL94-O COLOR:NATURAL
2	INSULATOR		1	PA66		UL94-O COLOR:NATURAL
3	CONTACT		N	PHOS-BRONZE		t=0.3 NI UNDERCOAT, Sn-Cu

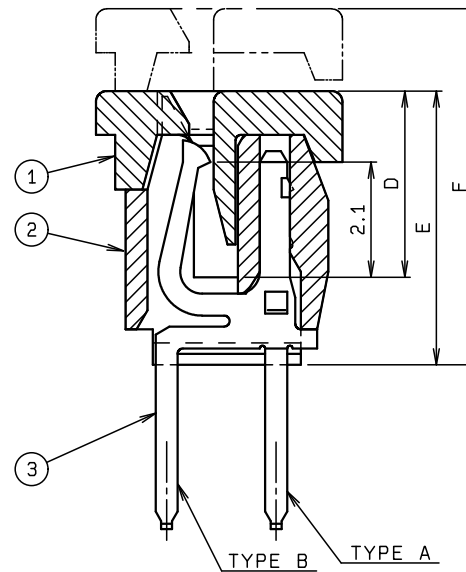

SECT. W-W (S=10:1)

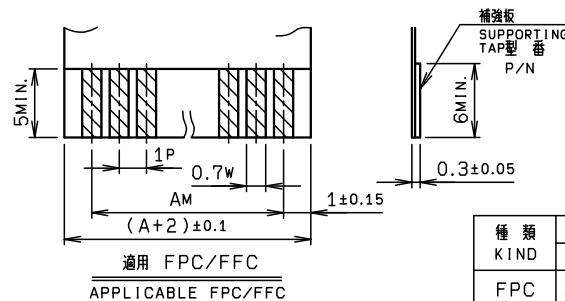

極数 NO. OF POS	A	B	C	D	E	F	G	H
5	4.0	10.4	11.4	3.4	5.0	6.5	0.8	6.12
6	5.0	11.4	12.4					7.12
7	6.0	12.4	13.4					8.12
8	7.0	13.4	14.4					9.12
9	8.0	14.4	15.4					10.12
10	9.0	15.4	16.4					11.12
11	10.0	16.4	17.4					12.12
12	11.0	17.4	18.4					13.12
13	12.0	18.4	19.4					14.12
14	13.0	19.4	20.4					15.12
15	14.0	20.4	21.4					16.12
16	15.0	21.4	22.4					17.12
17	16.0	22.4	23.4					18.12
18	17.0	23.4	24.4					19.12
19	18.0	24.4	25.4					20.12
20	19.0	25.4	26.4	3.4	5.0	6.5	0.8	21.12
21	20.0	26.4	27.4	3.6	5.2	6.7	1.0	22.12
22	21.0	27.4	28.4					23.12
23	22.0	28.4	29.4					24.12
24	23.0	29.4	30.4					25.12
25	24.0	30.4	31.4	3.6	5.2	6.7	1.0	26.12

注
NOTE

① キック加工は、コネクタ両端のタイプAコンタクトとする。
TYPE A CONTACTS IN BOTH ENDS OF
THE CONNECTOR ARE KINKED.

00 6208 000 1XX 001 / +





極数
NO. OF POS.

種類 KIND	公差 TOLERANCE		
	P	W	M
FPC	±0.02	+0.07 -0.05	±0.05
FFC	±0.05	±0.03	±0.1

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		C	DCN20030	2020/01/14	A. MURATA	N. KITAGAWA	Y. FUJII
				B	DCN19166	2019/03/19	A. MURATA	N. KITAGAWA	Y. FUJII
				O	EDN-804	2003/10/15	T. TODA		K. ONO
				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
				PART NAME / 品名					
±0.2		UNIT mm		ANGLE 3RD		SERIES 6208 FPC/FFC ASSY			
						1mmPITCH ST TYPE (5~25P)			
SCALE 5 : 1		DATE 2003/10/15		PART NO. / 型番					
				00 6208 000 1XX 001 / +					
DRAWN LI	DESIGNED T. TODA	CHECKED	APPROVED K. ONO	DWG NO. / 図番					
KYOCERA				BJS 6208177					
				SHEET/REV 1/2 C					

KYOCERA

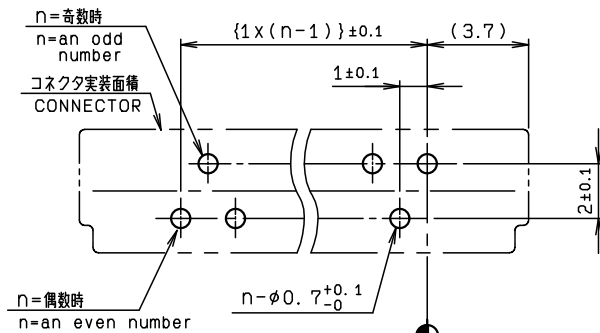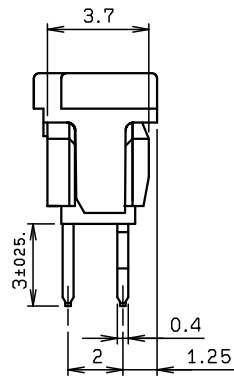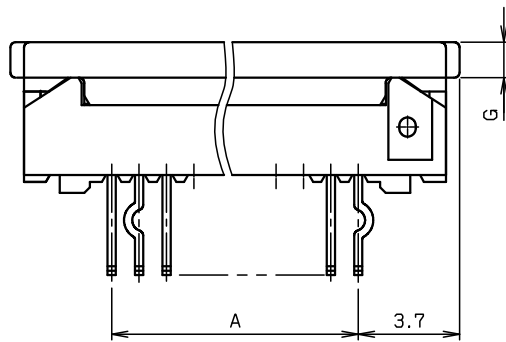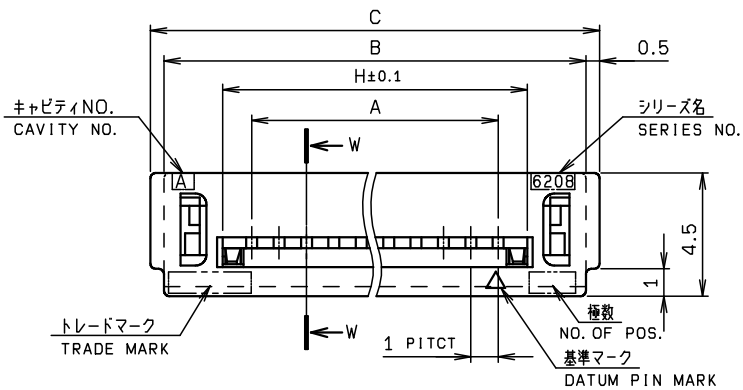

基板取付寸法 (コネクタ搭載側)
MOUNTING LAYOUT
t=1.2~1.6 mm

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	SLIDER		1	PPS		UL94-0 COLOR: NATURAL
2	INSULATOR		1	PA66		UL94-0 COLOR: NATURAL
3	CONTACT		N	PHOS-BRONZE		t=0.3 NI UNDERCOAT, Sn-Cu

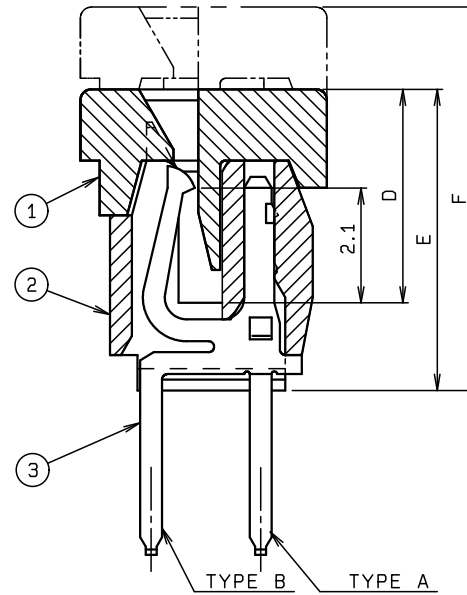

SECT. W-W (S=10:1)

極数 NO. OF POS	A	B	C	D	E	F	G	H
26	25.0	31.4	32.4	3.9	5.5	7.0	1.3	27.12
27	26.0	32.4	33.4					28.12
28	27.0	33.4	34.4					29.12
29	28.0	34.4	35.4					30.12
30	29.0	35.4	36.4	3.9	5.5	7.0	1.3	31.12

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
±0.2		UNIT	ANGLE	REFER TO SHEET		1/2			
		mm	3RD						
		SCALE	DATE	PART NAME / 品名					
		5 : 1	2003/10/15	SERIES 6208 FPC/FFC ASSY					
				1mmPITCH ST TYPE (26~30P)					
DRAWN	DESIGNED	CHECKED	APPROVED	PART NO. / 製番					
LI	T. TODA		K. ONO	00 6208 000 1XX 001 / +					
				DWG NO. / 図番				SHEET/REV	
				BJS 6208177				2/2 C	

KYOCERA