
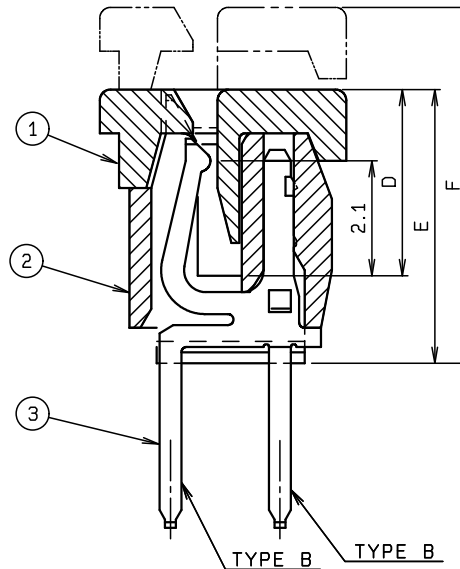


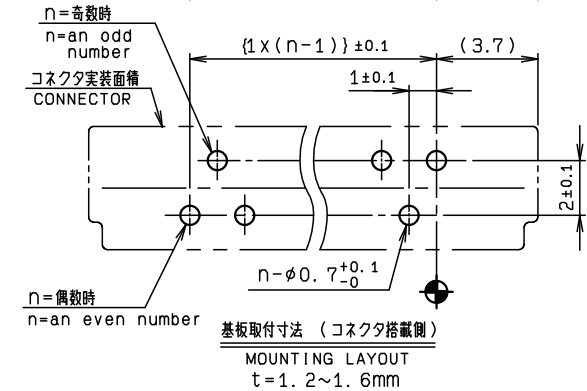
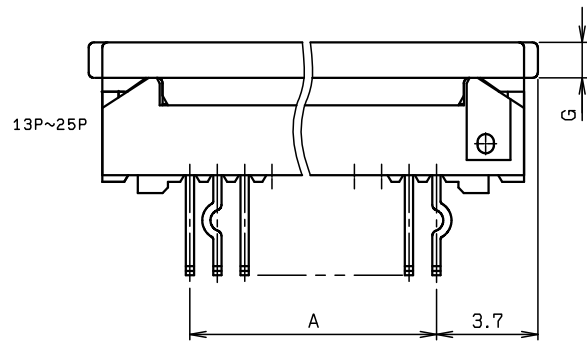
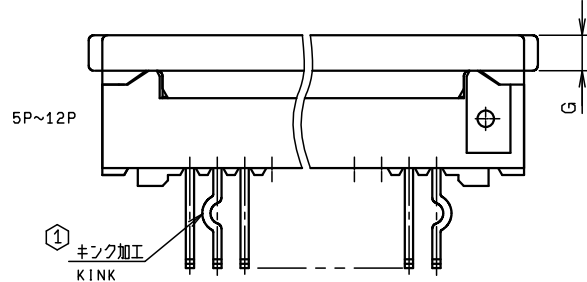
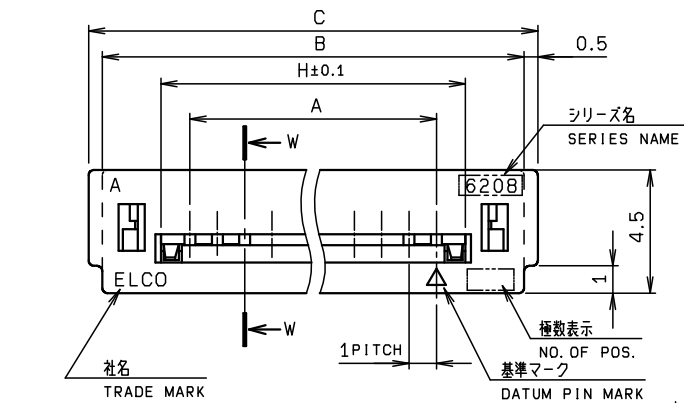


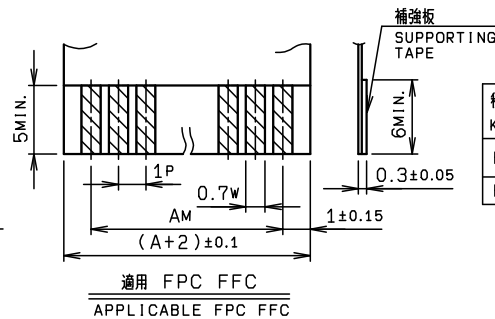

SECT. W-W (S=10:1)

適用 FPC FFC
APPLICABLE FPC FFC

種類 KIND	公差 TOLERANCE		
	P	W	M
FPC	±0.02	+0.07 -0.05	±0.05
FFC	±0.05	±0.03	±0.1

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	SLIDER		1	GF PPS		UL94-0 COLOR:NATURAL(IVORY)
2	INSULATOR		1	GF PA66		COLOR:NATURAL (REDDISH BROWN)
3	CONTACT		N	PHOS-BRONZE		t=0.3

極数 NO. OF POS.	A	B	C	D	E	F	G	H
5	4.0	10.4	11.4	3.4	5.0	6.5	0.8	6.12
6	5.0	11.4	12.4					7.12
7	6.0	12.4	13.4					8.12
8	7.0	13.4	14.4					9.12
9	8.0	14.4	15.4					10.12
10	9.0	15.4	16.4					11.12
11	10.0	16.4	17.4					12.12
12	11.0	17.4	18.4					13.12
13	12.0	18.4	19.4					14.12
14	13.0	19.4	20.4					15.12
15	14.0	20.4	21.4					16.12
16	15.0	21.4	22.4					17.12
17	16.0	22.4	23.4					18.12
18	17.0	23.4	24.4					19.12
19	18.0	24.4	25.4					20.12
20	19.0	25.4	26.4	3.4	5.0	6.5	0.8	21.12
21	20.0	26.4	27.4	3.6	5.2	6.7	1.0	22.12
22	21.0	27.4	28.4					23.12
23	22.0	28.4	29.4					24.12
24	23.0	29.4	30.4					25.12
25	24.0	30.4	31.4	3.6	5.2	6.7	1.0	26.12

注 記
NOTE

① キック加工は、コネクタ両端のタイプAコンタクトとする。
TYPE A CONTACTS IN BOTH ENDS OF
THE CONNECTOR ARE KINKED.

2. 型番 00 6208 000 1XX 020 +
P/N

極数
NO. OF POS.





バリエーション
VARIATION

020+:Auめっき Ni禁制帯付き
Au PLATED WITH Ni DAM

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		B	DCN20918	2020/10/08	N. KITAGAWA		M. YOSHIDA
10 ≤ X < 30 30 ≤ X	X < 10 ±0.2 X < 30 ±0.25 ±0.3	UNIT mm	ANGLE 3RD	A	DCN-209	2011/03/28	G. IKEDA		T. SATOH
				O	EDN-1589	2005/12/06	K. MURAKAMI	A. HAGIWARA	K. ONO
				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE 5 : 1	DATE 2005/12/06	PART NAME / 品名 SERIES 6208 FPC ASSY ST DIP 1mm PITCH (5~25P)					
DRAWN T. KOMATSU	DESIGNED K. MURAKAMI	CHECKED A. HAGIWARA	APPROVED K. ONO	PART NO. / 型番 00 6208 000 1XX 020 +					
		DWG NO. / 図番 BJS 6208190		SHEET/REV 1/2 B					

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
-----	-------------	----------	-----	----------	---------	---------

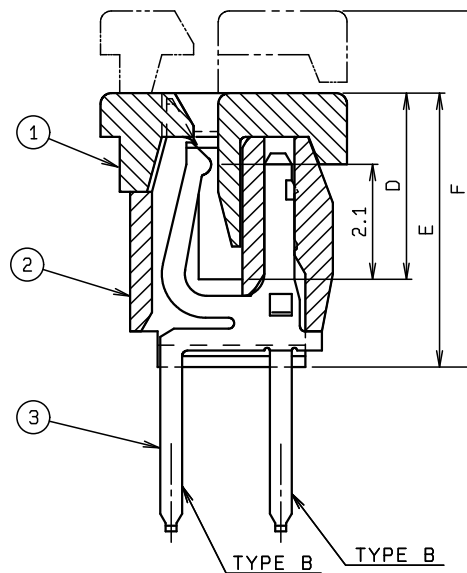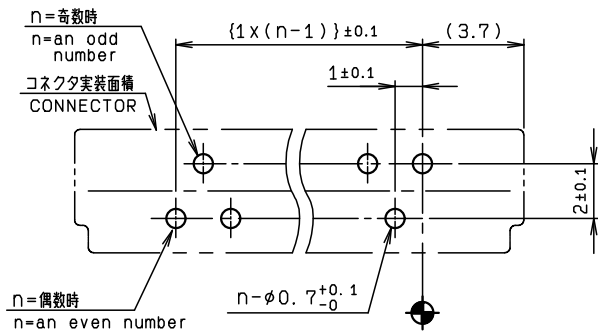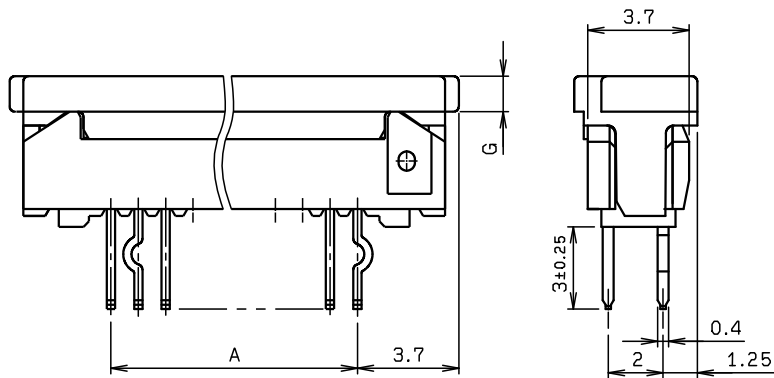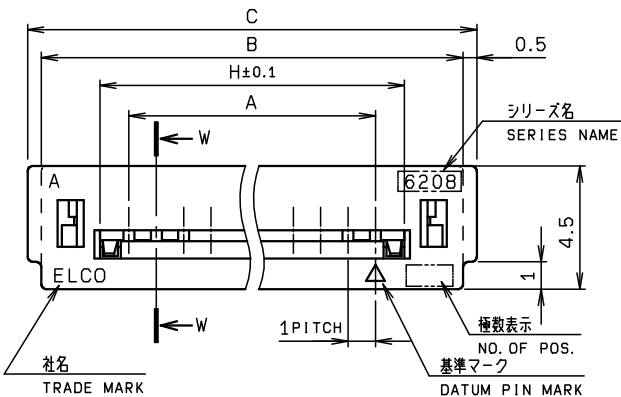

SECT. W-W (S=10:1)

極数 NO. OF POS.	A	B	C	D	E	F	G	H
26	25.0	31.4	32.4	3.9	5.5	7.0	1.3	27.12
27	26.0	32.4	33.4	↑	↑	↑	↑	28.12
28	27.0	33.4	34.4	↓	↓	↓	↓	29.12
29	28.0	34.4	35.4	↓	↓	↓	↓	30.12
30	29.0	35.4	36.4	3.9	5.5	7.0	1.3	31.12

注 記
NOTE


① キング加工は、コネクタ両端のタイプAコンタクトとする。
TYPE A CONTACTS IN BOTH ENDS OF
THE CONNECTOR ARE KINKED.

2. 型 番 00 6208 000 1XX 020 +
P/N

極 数
NO. OF POS.

バリエーション
VARIATION

020+:Auめっき Ni禁制帯付き
AU PLATED WITH NI DAM

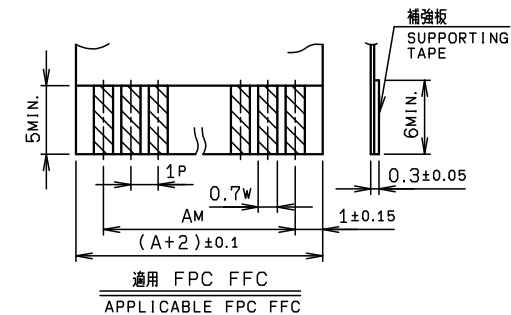

種 類	公 差 TOLERANCE		
KIND	P	W	M
FPC	±0.02	+0.07 -0.05	±0.05
FFC	±0.05	±0.03	±0.1

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格								
X <10 10 ≤ X <30 30 ≤ X	±0.2 ±0.25 ±0.3	UNIT		ANGLE	REFER TO SHEET		1/2			
		mm		3RD	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
		SCALE		DATE	PART NAME / 品名					
ANGLE / 角度		5 : 1		2005/12/06		SERIES 6208 FPC ASSY ST DIP 1mm PITCH (26~30P)				
DRAWN	DESIGNED	CHECKED	APPROVED		PART NO. / 型番					
T. KOMATSU	K. MURAKAMI	A. HAGIWARA	K. ONO		00 6208 000 1XX 020 +					
					DWG NO. / 図番				SHEET REV	
					BJS 6208190				2/2 B	