

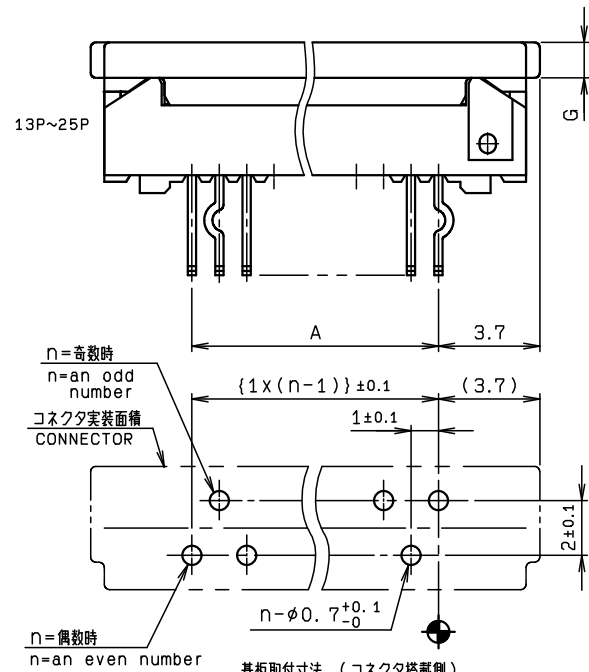
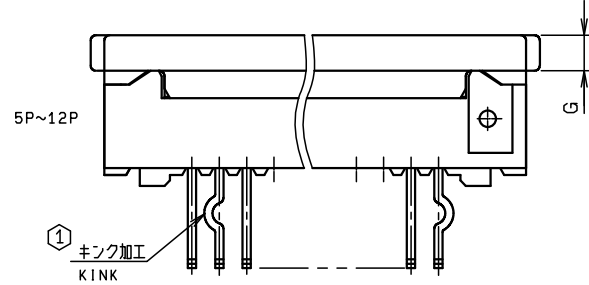



NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	SLIDER		1	GF PPS		UL94-0 COLOR:BLACK
2	INSULATOR		1	GF PPS		COLOR:BLACK
3	CONTACT		N	PHOS-BRONZE		t=0.3

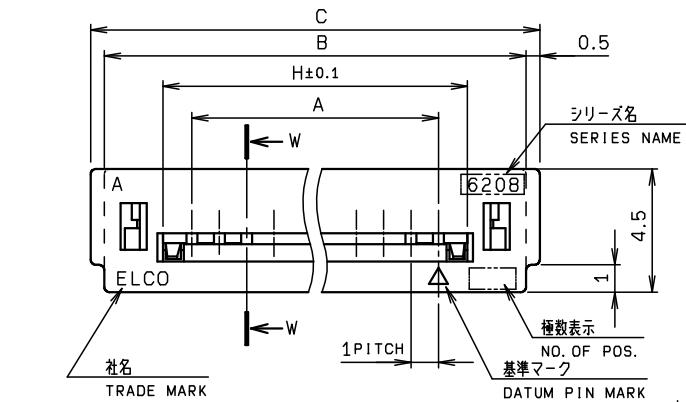

基板取付寸法 (コネクタ搭載側)
MOUNTING LAYOUT
t=1.2~1.6 mm

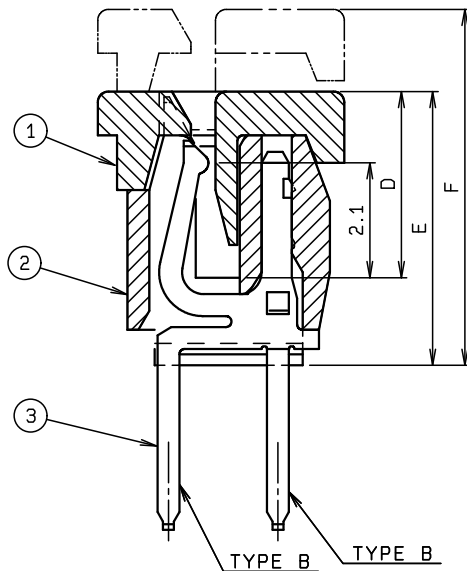

SECT. W-W (S=10/1)

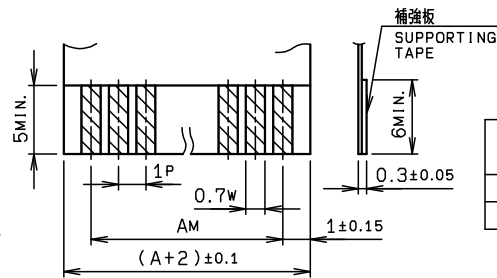

適用 FPC FFC
APPLICABLE FPC FFC

種類 KIND	公差 TOLERANCE		
	P	W	M
FPC	±0.02	+0.07 -0.05	±0.05
FFC	±0.05	±0.03	±0.1

極数 NO. OF POS.	A	B	C	D	E	F	G	H
5	4.0	10.4	11.4	3.4	5.0	6.5	0.8	6.12
6	5.0	11.4	12.4					7.12
7	6.0	12.4	13.4					8.12
8	7.0	13.4	14.4					9.12
9	8.0	14.4	15.4					10.12
10	9.0	15.4	16.4					11.12
11	10.0	16.4	17.4					12.12
12	11.0	17.4	18.4					13.12
13	12.0	18.4	19.4					14.12
14	13.0	19.4	20.4					15.12
15	14.0	20.4	21.4					16.12
16	15.0	21.4	22.4					17.12
17	16.0	22.4	23.4					18.12
18	17.0	23.4	24.4					19.12
19	18.0	24.4	25.4					20.12
20	19.0	25.4	26.4	3.4	5.0	6.5	0.8	21.12
21	20.0	26.4	27.4	3.6	5.2	6.7	1.0	22.12
22	21.0	27.4	28.4					23.12
23	22.0	28.4	29.4					24.12
24	23.0	29.4	30.4					25.12
25	24.0	30.4	31.4	3.6	5.2	6.7	1.0	26.12

注記
NOTE

① キック加工は、コネクタ両端のタイプAコンタクトとする。
TYPE A CONTACTS IN BOTH ENDS OF
THE CONNECTOR ARE KINKED.

2. 型番 P/N 00 6208 000 0XX 020 +

極数
NO. OF POS.

バリエーション
VARIATION
020+:Auめっき Ni禁制帯付き
Au PLATED WITH NI DAM




ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2		UNIT		ANGLE		O EDN-693		9-27-07	
10 ≤ X < 30 ±0.25		mm		3RD		NO. EDN/DCN		DATE	
30 ≤ X ±0.3		SCALE		DATE		ISSUE		CHECKED	
ANGLE / 角度 ±3°		5:1		9-27-07		APPROVED		PART NAME / 品名	
DRAWN M. TAKAHASHI		DESIGNED		CHECKED		APPROVED		SERIES 6208 FPC FFC ASSY SMT	
								1mmPITCH (5~25P)	
								PART NO. / 型番	
								00 6208 000 0XX 020 +	
								DWG NO. / 図番	
								BJS 6208213	
								SHEET/REV	
								1/2 0	


KYOCERA

KYOCERA Corporation

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
-----	-------------	----------	-----	----------	---------	---------

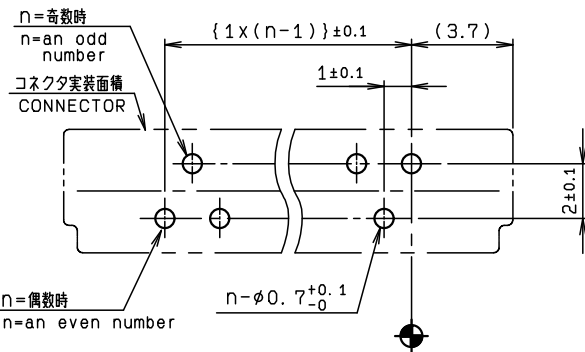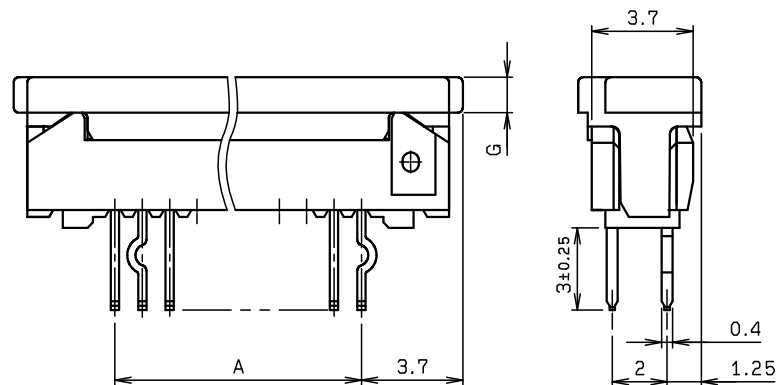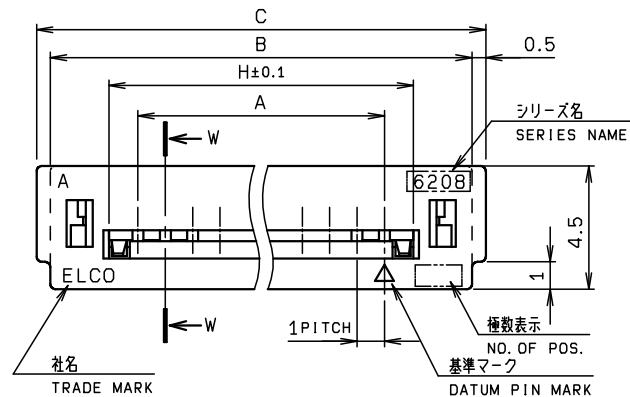

基板取付寸法 (コネクタ搭載側)
MOUNTING LAYOUT
t=1.2~1.6 mm

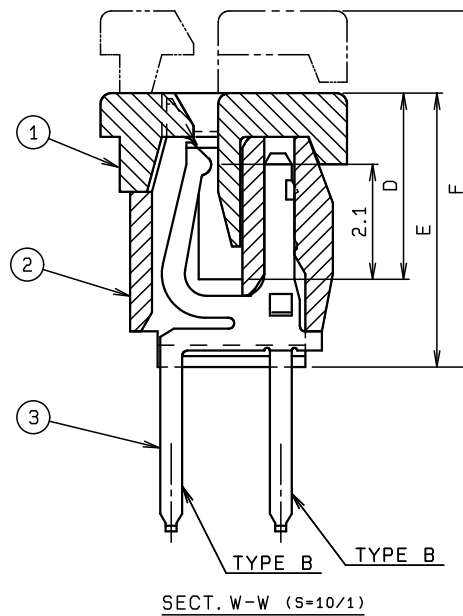

極数 NO. OF POS.	A	B	C	D	E	F	G	H
26	25.0	31.4	32.4	3.9	5.5	7.0	1.3	27.12
27	26.0	32.4	33.4	↑	↑	↑	↑	28.12
28	27.0	33.4	34.4	↓	↓	↓	↓	29.12
29	28.0	34.4	35.4	↓	↓	↓	↓	30.12
30	29.0	35.4	36.4	3.9	5.5	7.0	1.3	31.12

注記
NOTE


① キンク加工は、コネクタ両端のタイプAコンタクトとする。
TYPE A CONTACTS IN BOTH ENDS OF
THE CONNECTOR ARE KINKED.

2. 型番
P/N 00 6208 000 OXX 020 +

極数
NO. OF POS.

バリエーション
VARIATION

020+:Auめっき Ni禁制帯付き
AU PLATED WITH NI DAM

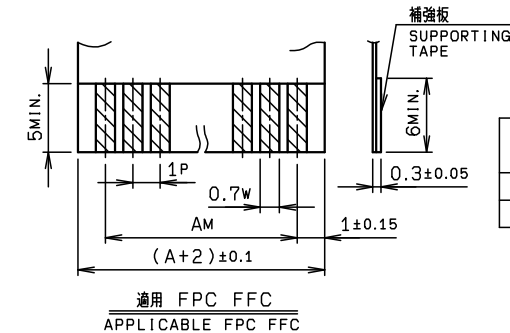

種類 KIND	公差 TOLERANCE		
	P	W	M
FPC	±0.02	+0.07 -0.05	±0.05
FFC	±0.05	±0.03	±0.1

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2		UNIT		ANGLE		REFER TO SHEET 1/2			
10 ≤ X < 30 ±0.25		mm		3RD		NO.		EDN/DCN	DATE
30 ≤ X ±0.3		SCALE		DATE		PART NAME / 品名		ISSUE	CHECKED
ANGLE / 角度		5:1		9-27-07		SERIES 6208 FPC FFC ASSY SMT			APPROVED
DRAWN		DESIGNED		CHECKED		PART NO. / 型番		DWG NO. / 図番	
M. TAKAHASHI						00 6208 000 OXX 020 +		BJS 6208213	
KYOCERA		KYOCERA Corporation						SHEET/REV	
								2/2 0	