



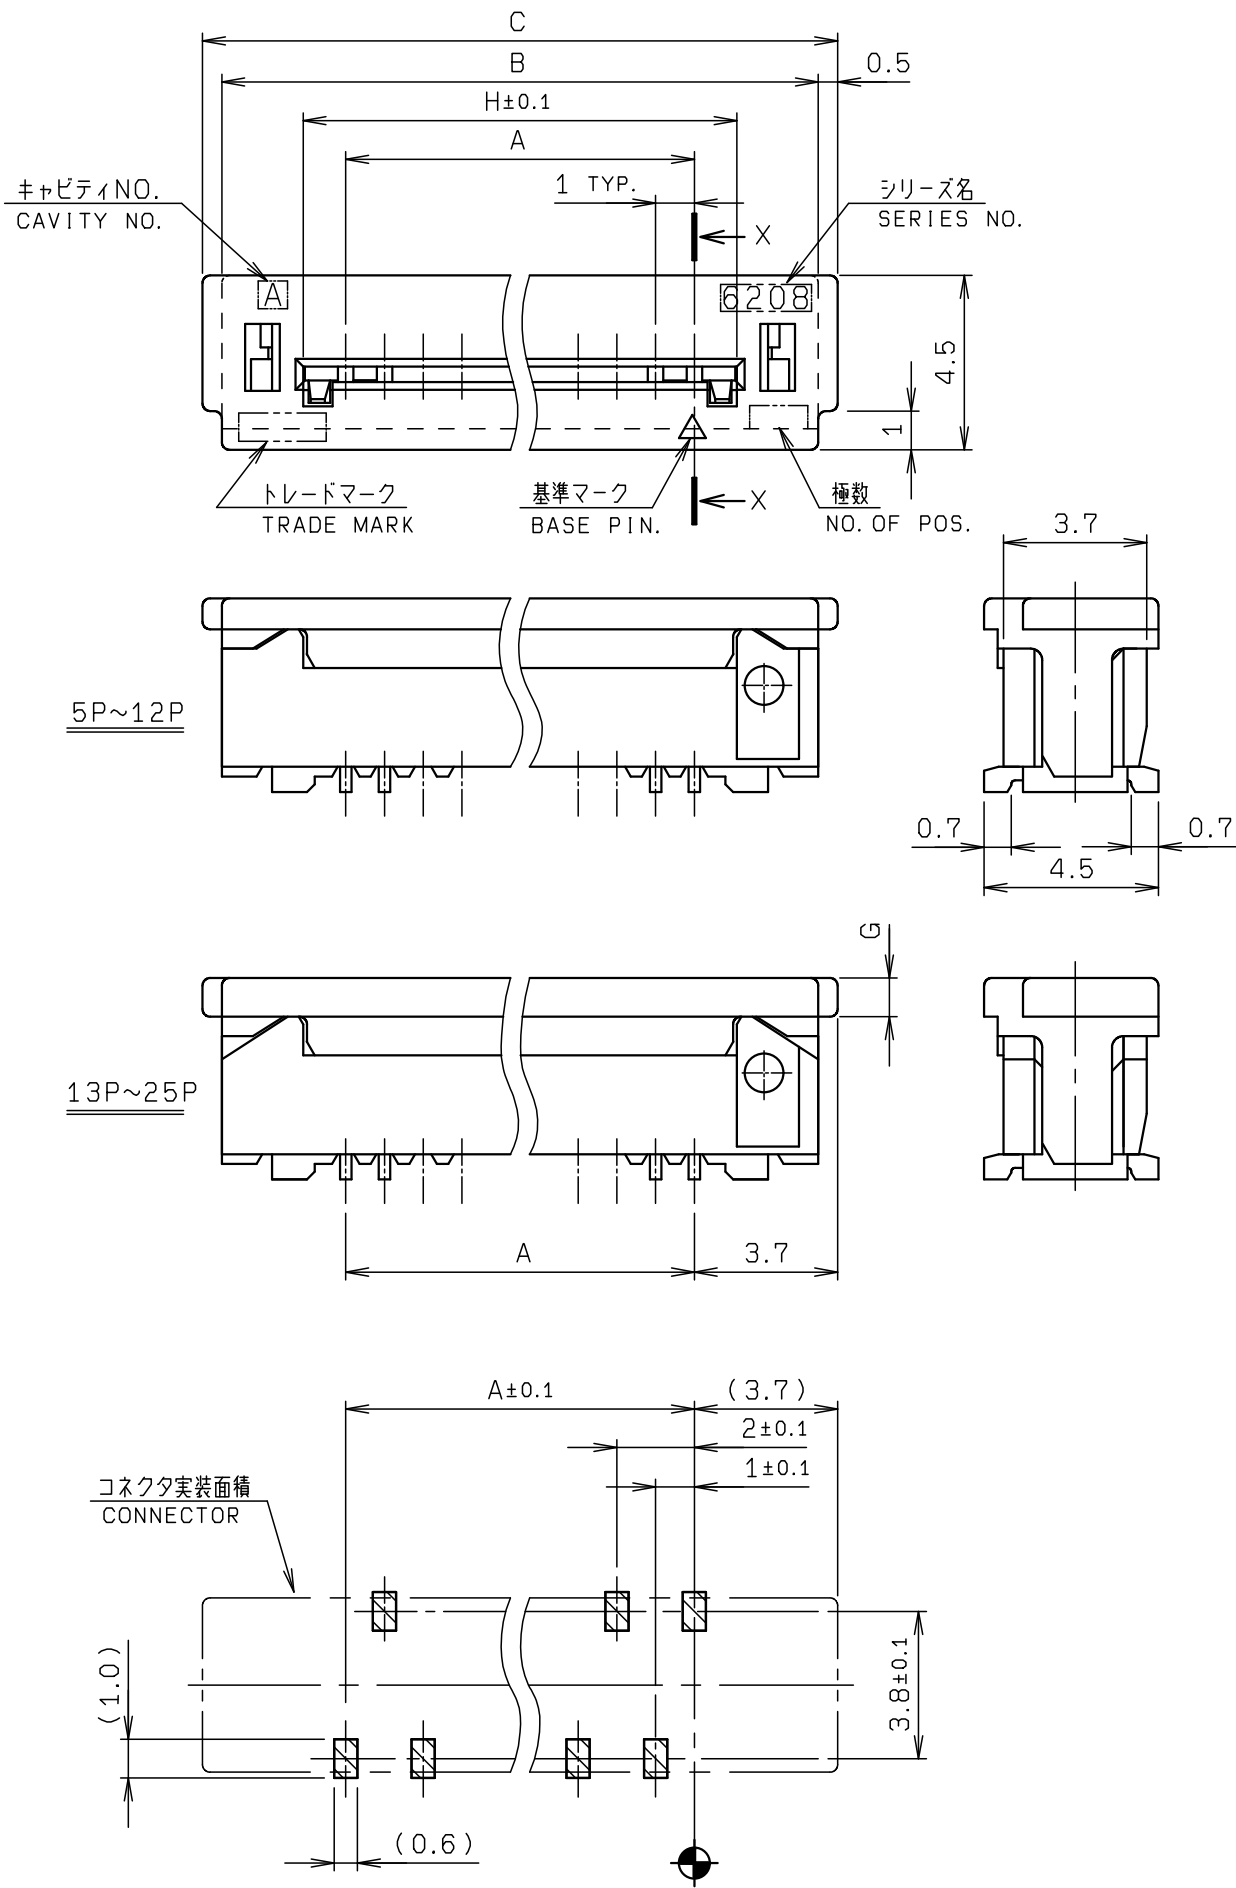


基板取付寸法
MOUNTING LAYOUT

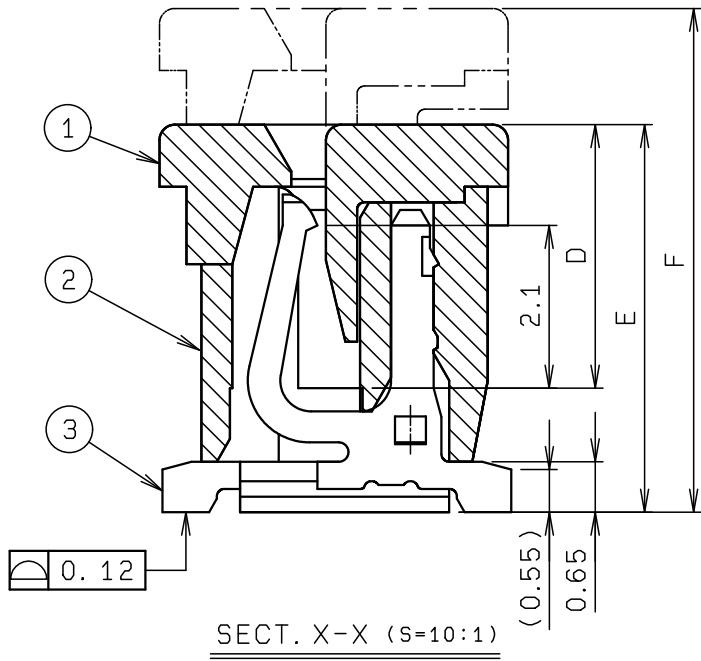

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	ACTUATOR		1	GF PPS		UL94V-0 COLOR: BLACK
2	INSULATOR		1	GF PPS		UL94V-0 COLOR: BLACK
3	CONTACT		N	PHOS-BRONZE (t0.3)		NI UNDERCOAT Sn-Cu

極数 NO. OF POS	A	B	C	D	E	F	G	H
5	4.0	10.4	11.4	3.4	5.0	6.5	0.8	6.12
6	5.0	11.4	12.4	3.4	5.0	6.5	0.8	7.12
7	6.0	12.4	13.4	3.4	5.0	6.5	0.8	8.12
8	7.0	13.4	14.4	3.4	5.0	6.5	0.8	9.12
9	8.0	14.4	15.4	3.4	5.0	6.5	0.8	10.12
10	9.0	15.4	16.4	3.4	5.0	6.5	0.8	11.12
11	10.0	16.4	17.4	3.4	5.0	6.5	0.8	12.12
12	11.0	17.4	18.4	3.4	5.0	6.5	0.8	13.12
13	12.0	18.4	19.4	3.4	5.0	6.5	0.8	14.12
14	13.0	19.4	20.4	3.4	5.0	6.5	0.8	15.12
15	14.0	20.4	21.4	3.4	5.0	6.5	0.8	16.12
16	15.0	21.4	22.4	3.4	5.0	6.5	0.8	17.12
17	16.0	22.4	23.4	3.4	5.0	6.5	0.8	18.12
18	17.0	23.4	24.4	3.4	5.0	6.5	0.8	19.12
19	18.0	24.4	25.4	3.4	5.0	6.5	0.8	20.12
20	19.0	25.4	26.4	3.4	5.0	6.5	0.8	21.12
21	20.0	26.4	27.4	3.6	5.2	6.7	1.0	22.12
22	21.0	27.4	28.4	3.6	5.2	6.7	1.0	23.12
23	22.0	28.4	29.4	3.6	5.2	6.7	1.0	24.12
24	23.0	29.4	30.4	3.6	5.2	6.7	1.0	25.12
25	24.0	30.4	31.4	3.6	5.2	6.7	1.0	26.12

※この表は1ページ目のみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 ONLY.

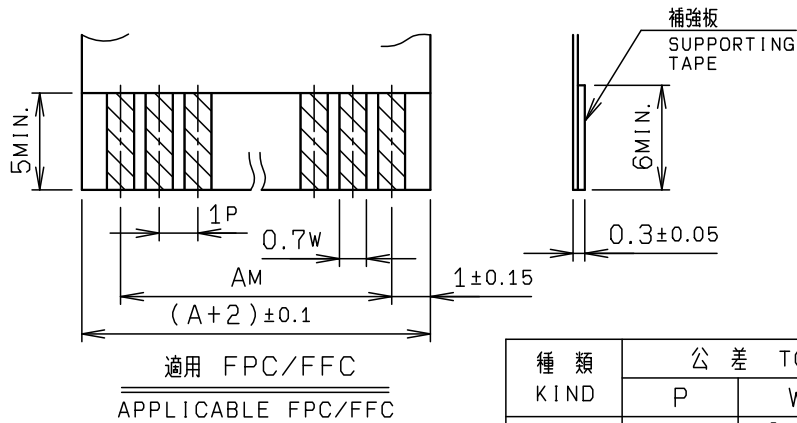


種類 KIND	公差 TOLERANCE		
	P	W	M
FPC	±0.02	+0.07 -0.05	±0.05
FFC	±0.05	±0.03	±0.1

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S) X <10 ±0.2 10≦ X <30 ±0.25 30≦ X ±0.3 ANGLE / 角度 ±3°		PRODUCT SPEC / 製品規格 UNIT mm SCALE 5 : 1		ANGLE 3RD DATE 2016/07/14		C	DCN24682	2024/12/11	R. NAKAJIMA	S. MORITA	Y. TSURUOKA
						B	DCN18670	2018/07/26	R. MAKABE	Y. MANBA	Y. FUJII
		O	EDN-333	2016/07/14	R. MAKABE	N. KITAGAWA	Y. FUJII				
		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED				
DRAWN M. TAKAHASHI		DESIGNED R. MAKABE		CHECKED N. KITAGAWA		APPROVED Y. FUJII		PART NAME / 品名 SERIES 6208 FPC/FFC ASSY 1mmPITCH SMT TYPE			
								PART NO. / 型番 00 6208 5XX X10 000 / +			
						DWG NO. / 図番 BJS 6208229				SHEET/REV 1/3 C	


© 2024 KYOCERA Corporation

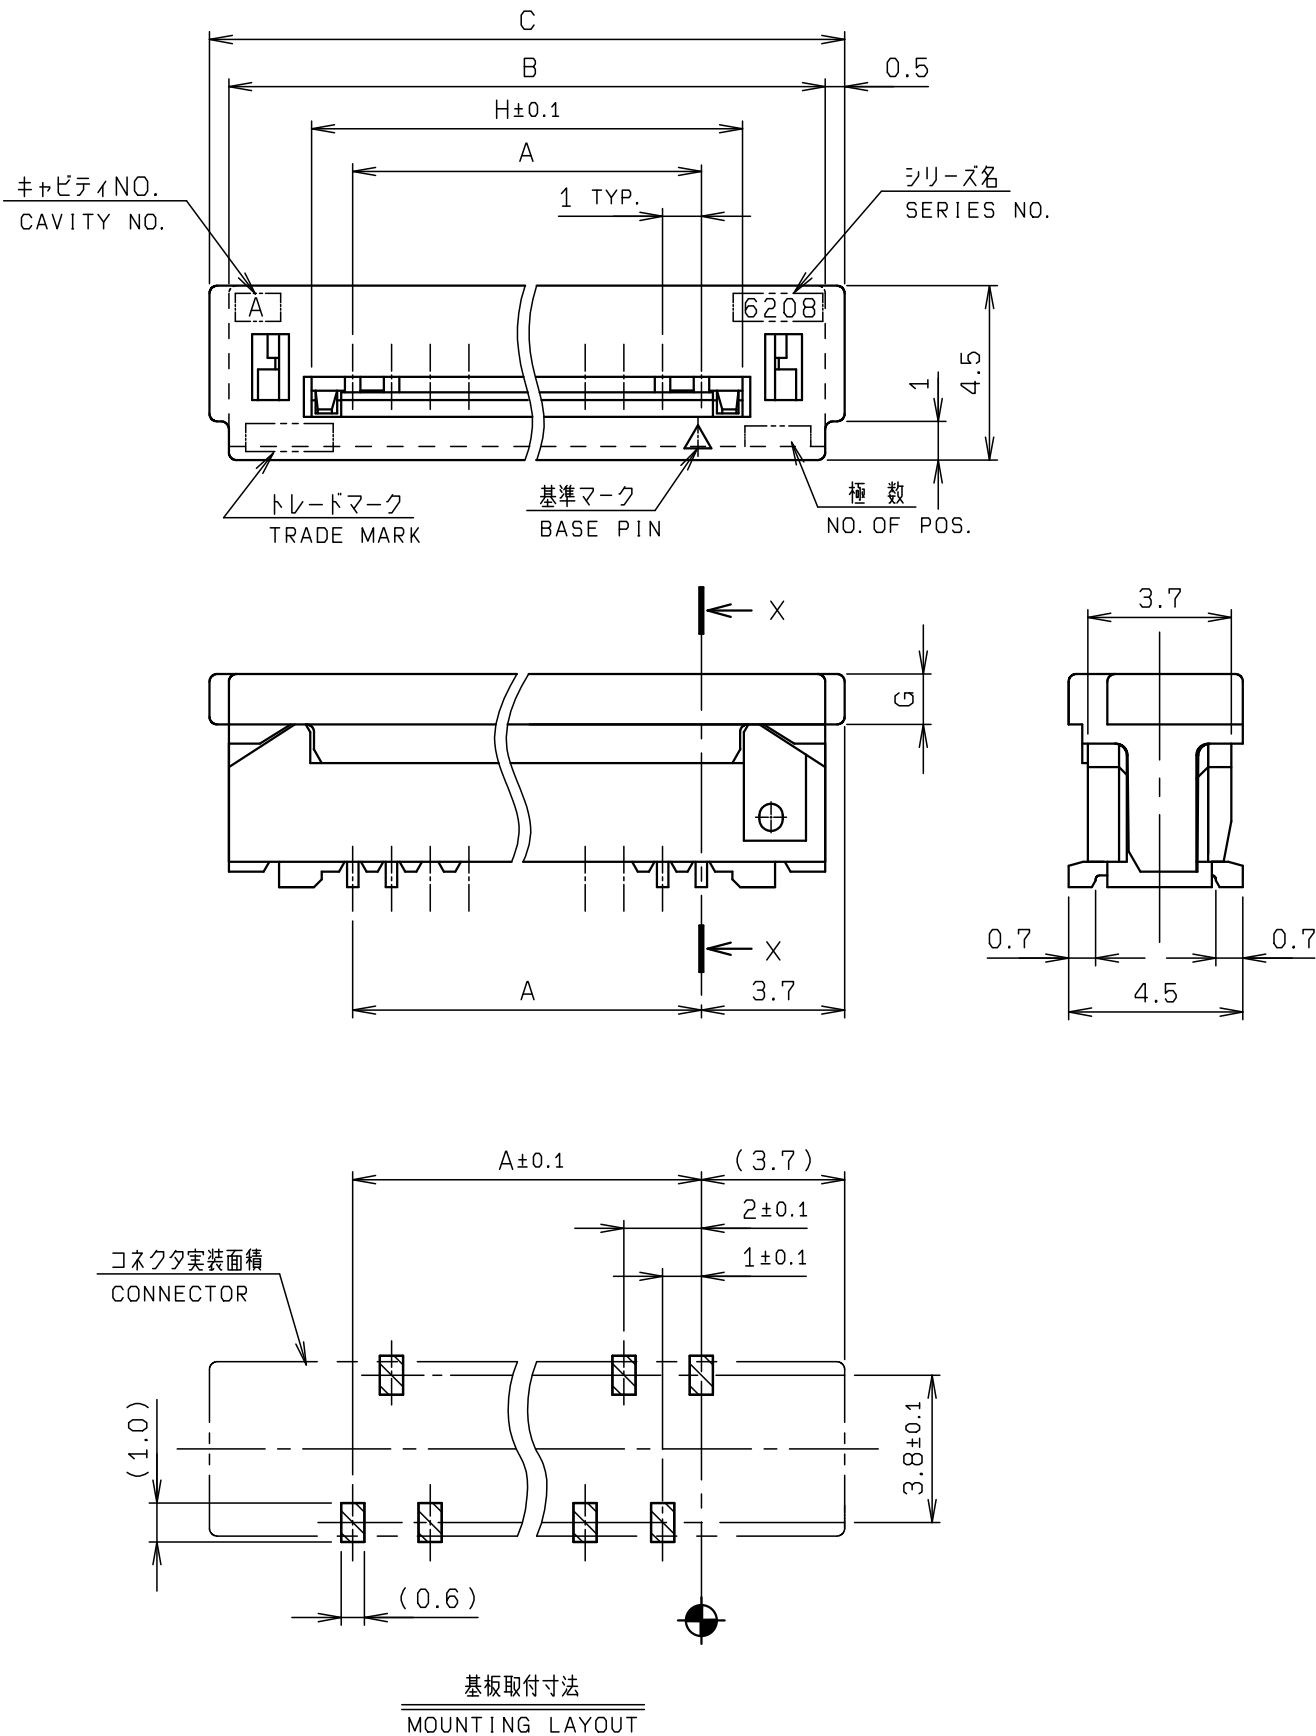

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	ACTUATOR		1	GF PPS		UL94V-0 COLOR:BLACK
2	INSULATOR		1	GF PPS		UL94V-0 COLOR:BLACK
3	CONTACT		N	PHOS-BRONZE (t0.3)		NI UNDERCOAT Sn-Cu

極数 NO. OF POS	A	B	C	D	E	F	G	H
26	25.0	31.4	32.4	3.9	5.5	7.0	1.3	27.12
28	27.0	33.4	34.4	3.9	5.5	7.0	1.3	29.12
30	29.0	35.4	36.4	3.9	5.5	7.0	1.3	31.12


※この表は2ページ目にのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-2 ONLY.

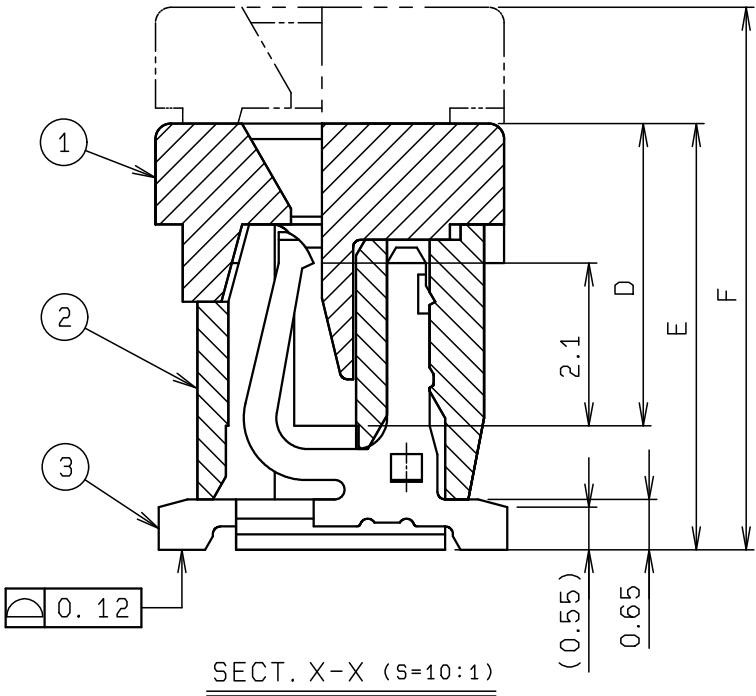

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2		UNIT mm		ANGLE 3RD		REFER TO SHEET 1/3			
10 ≤ X <30 ±0.25		SCALE 5 : 1		DATE 2016/07/14		NO.	EDN/DCN	DATE	ISSUE
30 ≤ X ±0.3		ANGLE / 角度 ±3°		PART NAME / 品名		SERIES 6208 FPC/FFC ASSY		1mmPITCH SMT TYPE	
DRAWN M. TAKAHASHI		DESIGNED R. MAKABE		CHECKED N. KITAGAWA		APPROVED Y. FUJII		PART NO. / 型番	
								00 6208 5XX X10 000 / +	
								DWG NO. / 図番	
								BJS 6208229	
								SHEET/REV	
								2/3 C	



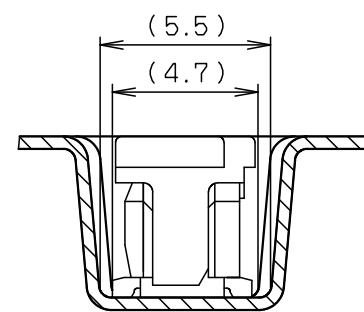

SECT. F-F (S=4:1)



※この注記の1～3は3ページ目にのみ適用
※THESE NOTES 1 TO 3 ARE APPLICABLE TO
SHEET-3 ONLY.

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
$10 \leq X < 30$ ± 0.2 ± 0.25 ± 0.3		UNIT mm	ANGLE 3RD	REFER TO SHEET 1/3					
ANGLE / 角度 $\pm 3^\circ$		SCALE 2 : 1	DATE 2016/07/14	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
				PART NAME / 品名 SERIES 6208 EMOSS TAPE ASSY					
DRAWN M. TAKAHASHI	DESIGNED R. MAKABE	CHECKED N. KITAGAWA	APPROVED Y. FUJII	PART NO. / 型番 00 6208 5XX X10 000 / +					
				DWG NO. / 図番 BJS 6208229				SHEET/REV 3/3 C	