

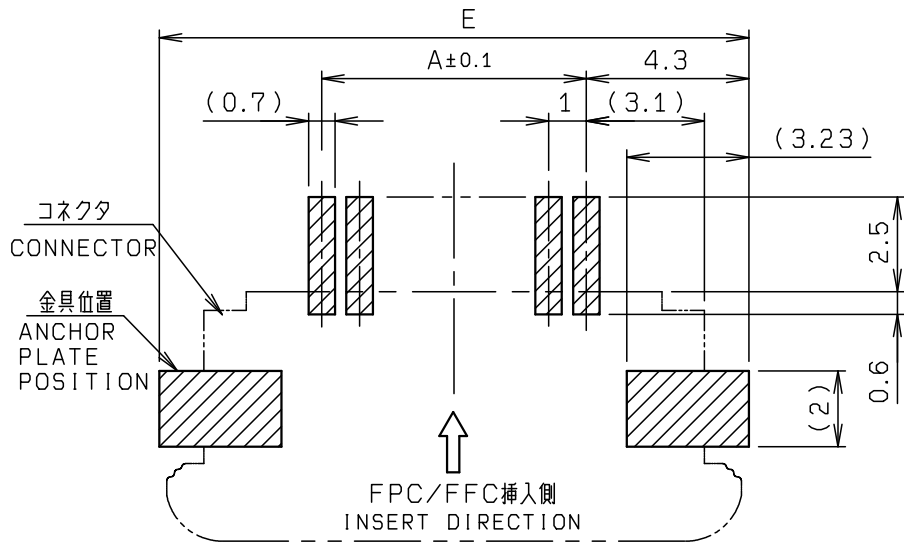
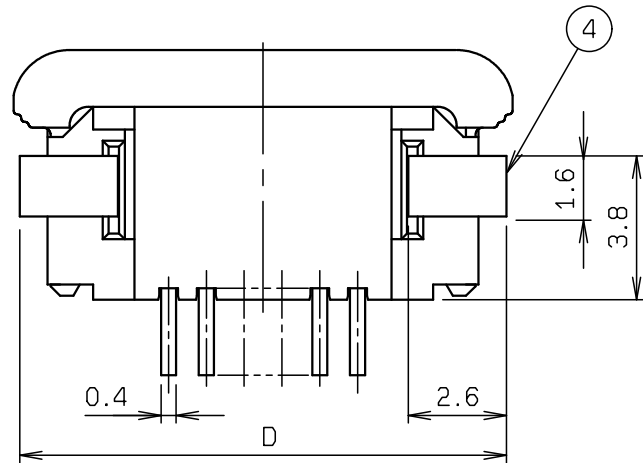
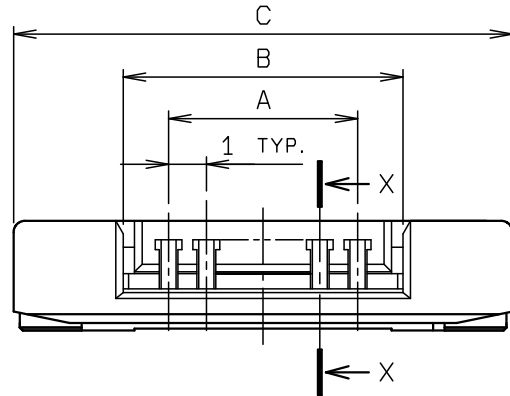
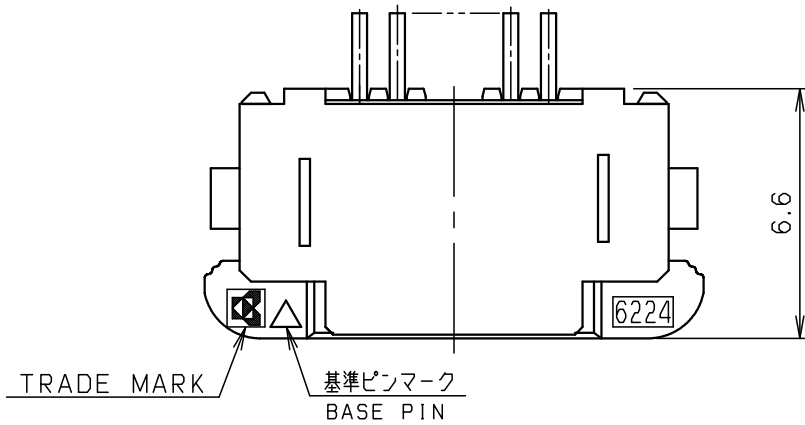
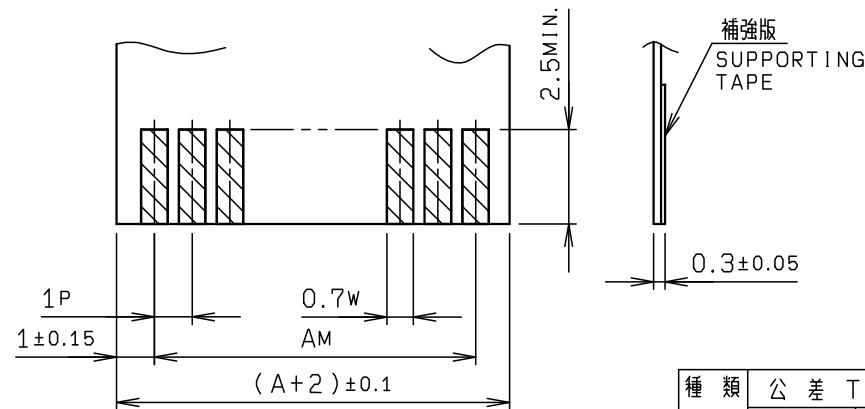


© 2025 KYOCERA Corporation

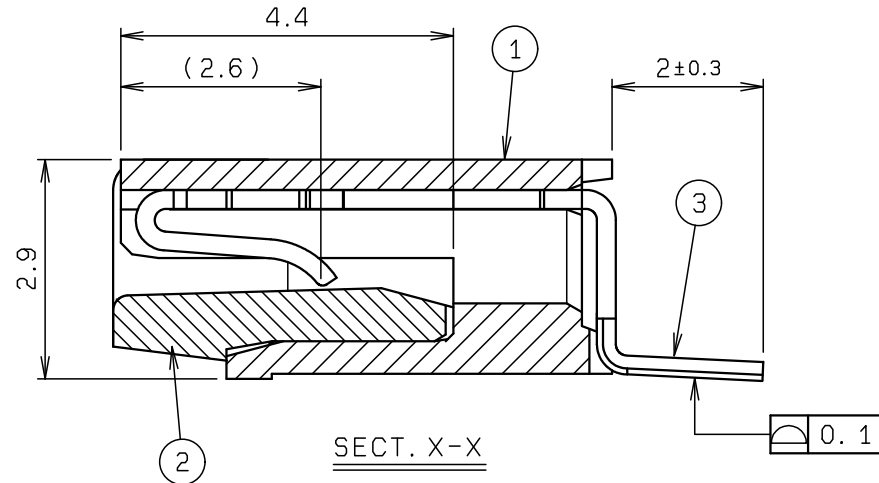

取付け基板寸法 (コネクタ搭載側)
MOUNTING LAYOUT

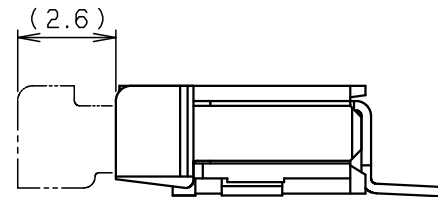

適用AuめっきFPC
APPLICABLE Au PLATING FPC

種類	公差 TOLERANCE		
KIND	P	W	M
FPC	±0.02	+0.07 -0.05	±0.05

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTING PLASTIC		COLOR: BROWN
2	ACTUATOR		1	HEAT RESISTING PLASTIC		COLOR: BLACK
3	CONTACT		N	PHOS-BRONZE	t=0.25	CONTACT AREA: Au 0.1μMIN. TAIL AREA: Sn-Cu 2μMIN.
4	ANCHOR PLATE		2	PHOS-BRONZE		t=0.25 Sn-Cu PLATING


極数 NO. OF POS	A	B	C	D	E
5	4.0	6.2	12.2	11.9	12.6
6	5.0	7.2	13.2	12.9	13.6
7	6.0	8.2	14.2	13.9	14.6
8	7.0	9.2	15.2	14.9	15.6
9	8.0	10.2	16.2	15.9	16.6
10	9.0	11.2	17.2	16.9	17.6
11	10.0	12.2	18.2	17.9	18.6
12	11.0	13.2	19.2	18.9	19.6
13	12.0	14.2	20.2	19.9	20.6
14	13.0	15.2	21.2	20.9	21.6
15	14.0	16.2	22.2	21.9	22.6
16	15.0	17.2	23.2	22.9	23.6
17	16.0	18.2	24.2	23.9	24.6
18	17.0	19.2	25.2	24.9	25.6
19	18.0	20.2	26.2	25.9	26.6
20	19.0	21.2	27.2	26.9	27.6
21	20.0	22.2	28.2	27.9	28.6
22	21.0	23.2	29.2	28.9	29.6
23	22.0	24.2	30.2	29.9	30.6
24	23.0	25.2	31.2	30.9	31.6
25	24.0	26.2	32.2	31.9	32.6
26	25.0	27.2	33.2	32.9	33.6
27	26.0	28.2	34.2	33.9	34.6
28	27.0	29.2	35.2	34.9	35.6
29	28.0	30.2	36.2	35.9	36.6
30	29.0	31.2	37.2	36.9	37.6

※この表は1ページ目のみ適用
※THIS CHART IS APPLICABLE TO SHEET-1 ONLY.


TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		D	DCN25194	2025/05/13	R. NAKAJIMA	Y. TSURUOKA	H. TAMAI
±0.2				C	DCN21831	2021/12/20	S. MORITA	H. LU	A. TSUNEMURA
		UNIT	ANGLE	O	EDN-410	2005/03/31	K. MURAKAMI	A. HAGIWARA	N. HAYASHI
		mm	3RD	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
		SCALE	DATE	PART NAME / 品名					
		5 : 1	2003/10/01	SERIES 6224 FPC ASSY RA SMT 1mm PITCH AU PLATING WITH ANCHOR PLATE					
DRAWN K. MURAKAMI		DESIGNED K. MURAKAMI	CHECKED A. HAGIWARA	APPROVED N. HAYASHI	PART NO. / 型番				
				08 6224 0XX 002 883 +					
				DWG NO. / 図番					SHEET/REV
				BJS 6224050					1/2 D

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS



KYOCERA

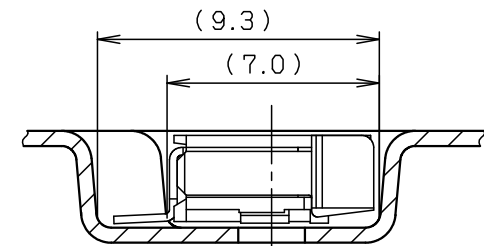


SECT. E-E (S=4:1)

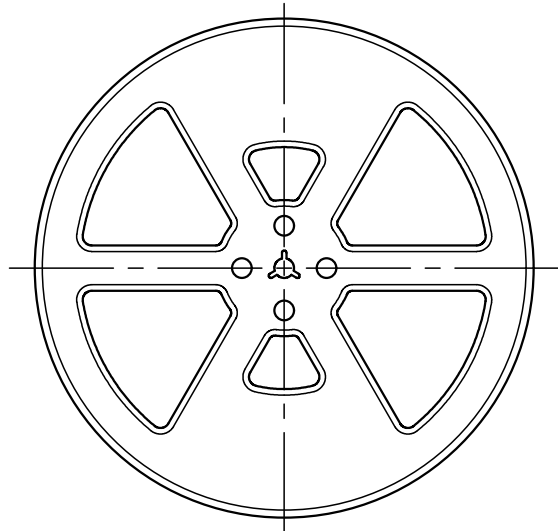

REEL DIMENSION (S=1:5)

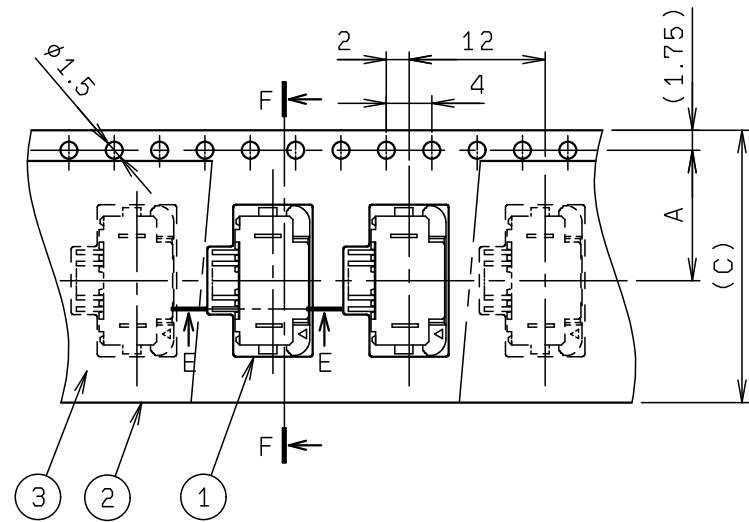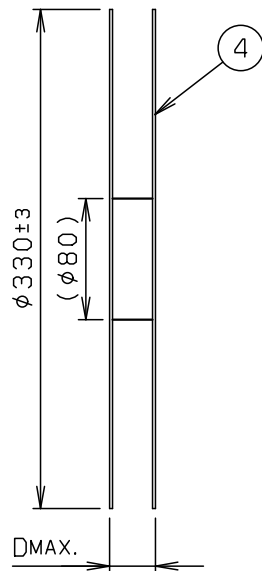

SECT. F-F
(5~11P)

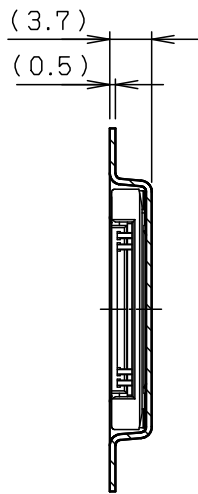

SECT. F-F
(12~30P)


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	08 6224 0XX 002 883 +	1000			00 6224 0XX 002 883 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

注 記
NOTE

- 梱包数量 : 1000 個/リール
PACKING QUANTITY : 1000 ea/reel
- 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

3. 引出し方向

USER DIRECTION OF FEED

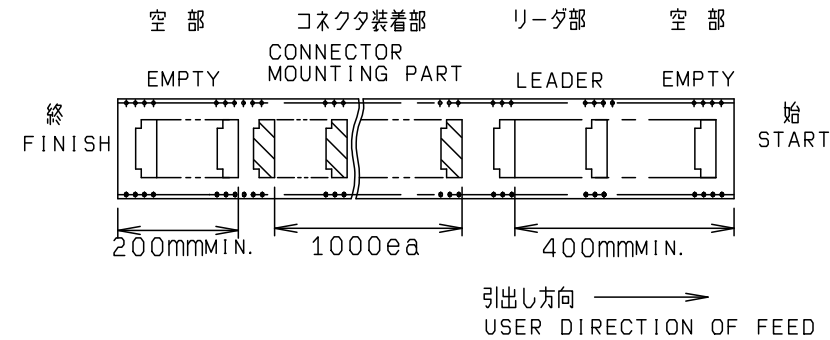

4. 型 番
P/N

08 6224 0XX 002 883 +

極 数

NO. OF POS.

めっき

PLATING

883+:Au (ANCHOR PLATE:Sn HOTDIP OR Sn REFLOW)

※この注記の1~3は2ページ目へのみ適用

※THESE NOTES 1 TO 3 ARE APPLICABLE TO
SHEET-2 ONLY.

極 数 NO. OF POS.	A	B	C	D
5	11.5	—	24.0	30.4
6	11.5	—	24.0	30.4
7	11.5	—	24.0	30.4
8	11.5	—	24.0	30.4
9	11.5	—	24.0	30.4
10	11.5	—	24.0	30.4
11	11.5	—	24.0	30.4
12	14.2	28.4	32.0	38.4
13	14.2	28.4	32.0	38.4
14	14.2	28.4	32.0	38.4
15	14.2	28.4	32.0	38.4
16	14.2	28.4	32.0	38.4
17	20.2	40.4	44.0	50.4
18	20.2	40.4	44.0	50.4
19	20.2	40.4	44.0	50.4
20	20.2	40.4	44.0	50.4
21	20.2	40.4	44.0	50.4
22	20.2	40.4	44.0	50.4
23	20.2	40.4	44.0	50.4
24	20.2	40.4	44.0	50.4
25	20.2	40.4	44.0	50.4
26	20.2	40.4	44.0	50.4
27	20.2	40.4	44.0	50.4
28	26.2	52.4	56.0	62.4
29	26.2	52.4	56.0	62.4
30	26.2	52.4	56.0	62.4

※この表は2ページ目へのみ適用

※THIS CHART IS APPLICABLE TO
SHEET-2 ONLY.

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2 10≤ X <30 ±0.25 30≤ X ±0.3		UNIT		ANGLE	REFER		TO SHEET	1/2	
		mm		3RD					
					NO.	EDN/DCN	DATE	ISSUE	CHECKED
ANGLE / 角度 ±3°		SCALE		DATE		PART NAME / 品名			
		2 : 1		2005/03/31		SERIES 6224 EMBOSS TAPE ASSY FPC ASSY RA SMT			
DRAWN	DESIGNED	CHECKED	APPROVED	PART NO. / 型番					
K. MURAKAMI	K. MURAKAMI	A. HAGIWARA	N. HAYASHI	08 6224 OXX 002 883 +					
				DWG NO. / 図番				SHEET/REV	
				BJS 6224050				12/2 1 D	