

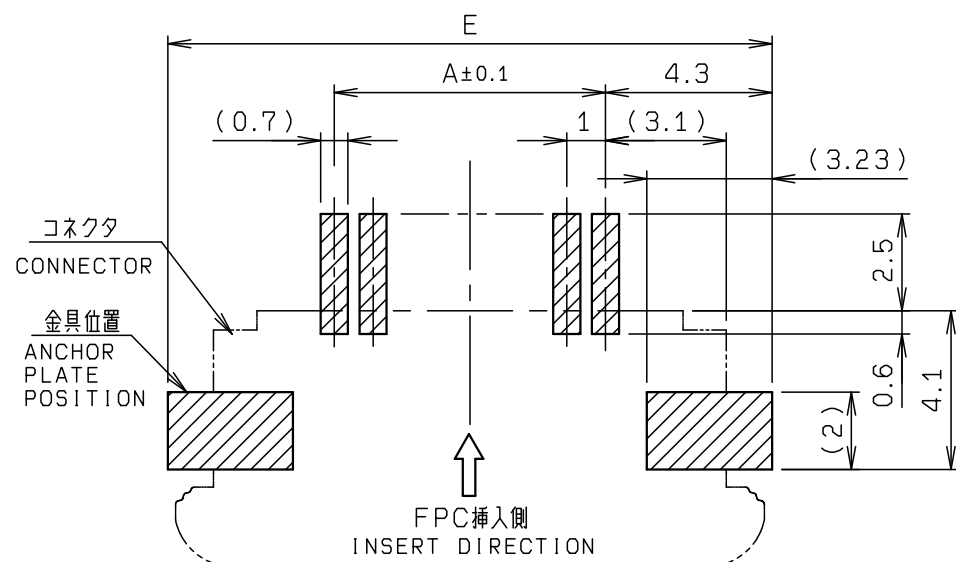
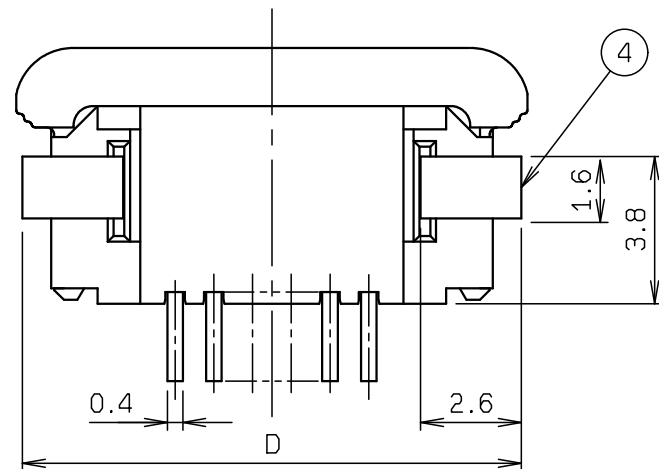
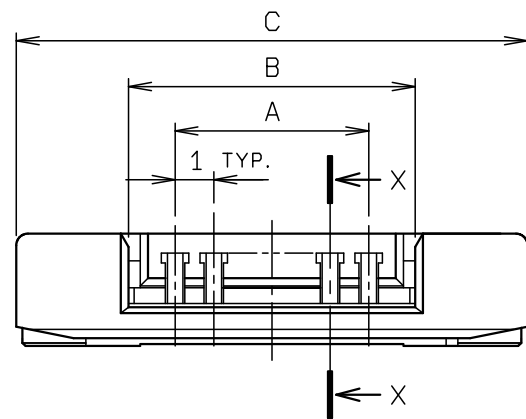
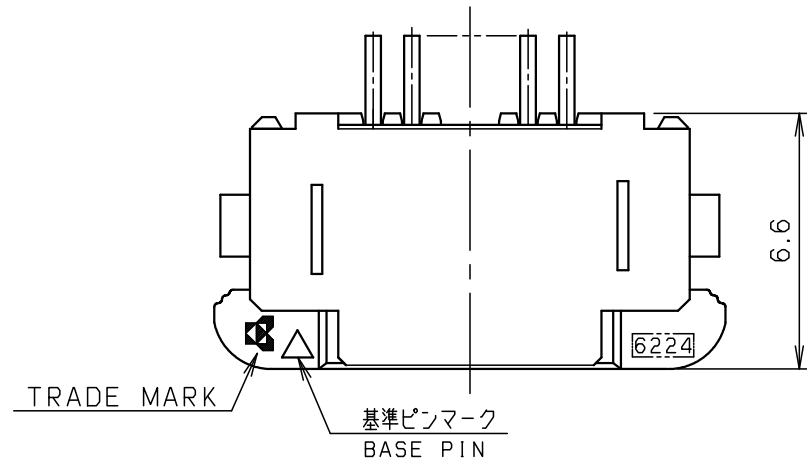
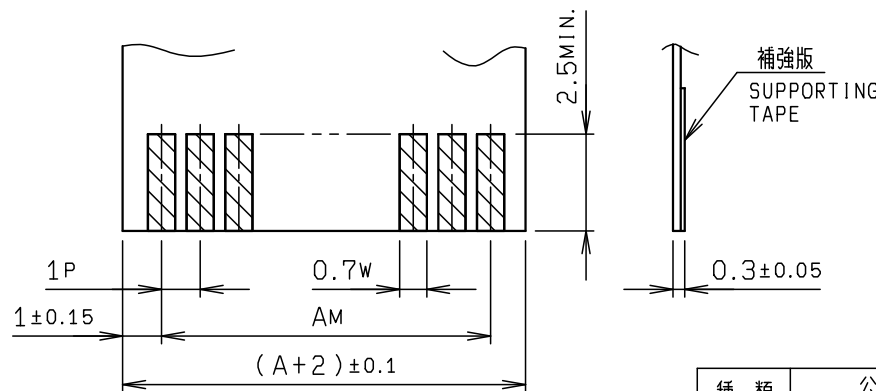


© 2021 KYOCERA Corporation

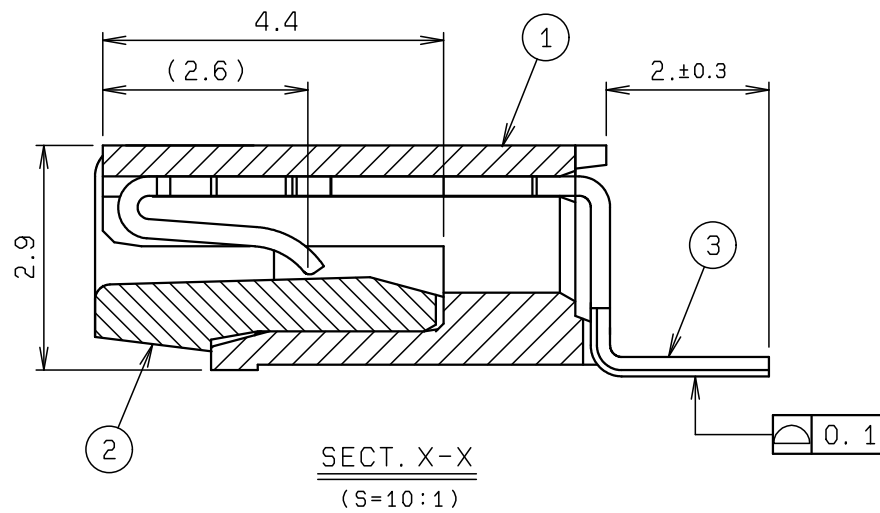

取付け基板寸法 (コネクタ搭載側)
MOUNTING LAYOUT

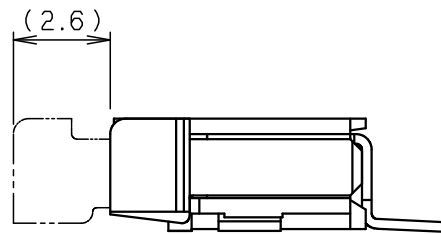

適用FPC/FFC寸法
(Auめっき又はC/Agタイプ)
APPLICABLE FPC/FFC
(Au PLATING OR C/Ag TYPE)

種類 KIND	公差 TOLERANCE		
	P	W	M
FPC	±0.02	+0.07 -0.05	±0.05
FFC	±0.05	±0.03	±0.1



ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTING PLASTIC		COLOR:BLACK
2	SLIDER		1	HEAT RESISTING PLASTIC		COLOR:BLACK
3	CONTACT		N	PHOS-BRONZE		t=0.25 Au PLATING
4	ANCHOR PLATE		2	PHOS-BRONZE		t=0.25 Sn-Cu PLATING



極数 NO. OF POS.	A	B	C	D	E
5	4.0	6.2	12.2	11.9	12.6
6	5.0	7.2	13.2	12.9	13.6
7	6.0	8.2	14.2	13.9	14.6
8	7.0	9.2	15.2	14.9	15.6
9	8.0	10.2	16.2	15.9	16.6
10	9.0	11.2	17.2	16.9	17.6
11	10.0	12.2	18.2	17.9	18.6
12	11.0	13.2	19.2	18.9	19.6
13	12.0	14.2	20.2	19.9	20.6
14	13.0	15.2	21.2	20.9	21.6
15	14.0	16.2	22.2	21.9	22.6
16	15.0	17.2	23.2	22.9	23.6
17	16.0	18.2	24.2	23.9	24.6
18	17.0	19.2	25.2	24.9	25.6
19	18.0	20.2	26.2	25.9	26.6
20	19.0	21.2	27.2	26.9	27.6
21	20.0	22.2	28.2	27.9	28.6
22	21.0	23.2	29.2	28.9	29.6
23	22.0	24.2	30.2	29.9	30.6
24	23.0	25.2	31.2	30.9	31.6
25	24.0	26.2	32.2	31.9	32.6
26	25.0	27.2	33.2	32.9	33.6
27	26.0	28.2	34.2	33.9	34.6
28	27.0	29.2	35.2	34.9	35.6
29	28.0	30.2	36.2	35.9	36.6
30	29.0	31.2	37.2	36.9	37.6

※この表は1ページ目にのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 ONLY.


TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		C	DCN21831	2021/12/20	S. MORITA	H. LU	A. TSUNEMURA
X < 10 ±0.2		UNIT		B	DCN20564	2020/06/01	Y. SANPEI	Y. MANBA	Y. FUJII
10 ≤ X < 30 ±0.25		mm		O	EDN-605	2005/05/07	N. KITAGAWA	A. HAGIWARA	N. HAYASHI
30 ≤ X ±0.3		ANGLE		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度		3RD		PART NAME / 品名					
±3°		SCALE		SERIES 6224 FPC/FFC ASSY					
DRAWN		DATE		Au PLATING OR C/Ag TYPE					
LI		5 : 1		1mm PITCH CONN. (WITH ANCHOR PLATE)					
DESIGNED		APPROVED		PART NO. / 型番					
K. MURAKAMI		A. HAGIWARA		08 6224 OXX 002 829 +					
CHECKED		N. HAYASHI		DWG NO. / 図番					
6224		KYOCERA		BJS 6224054					
APPROVED		SHEET REV		1/2 C					
N. HAYASHI									

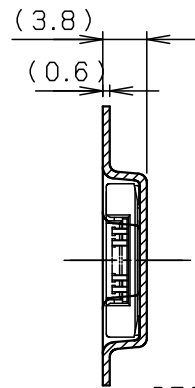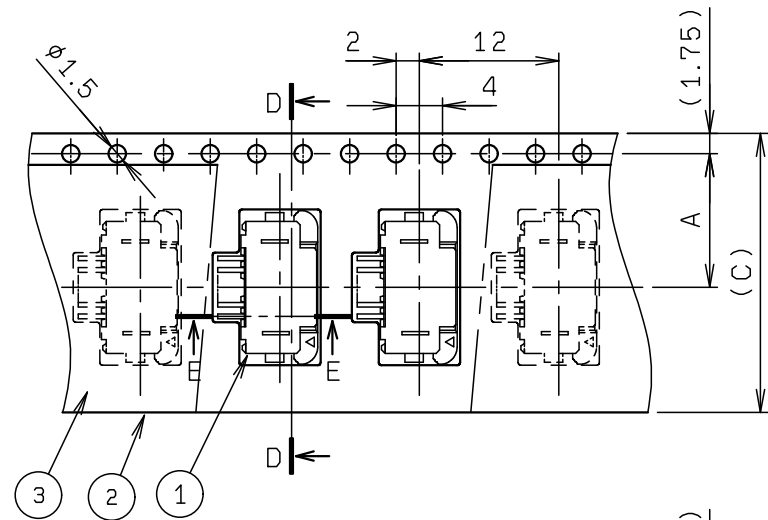


SECT. D-D
(5~11P)

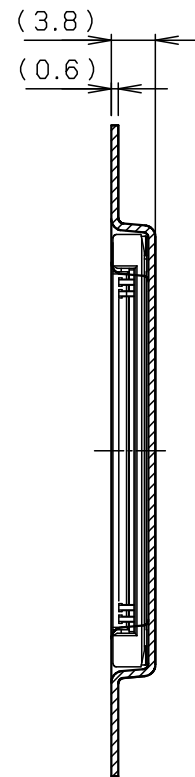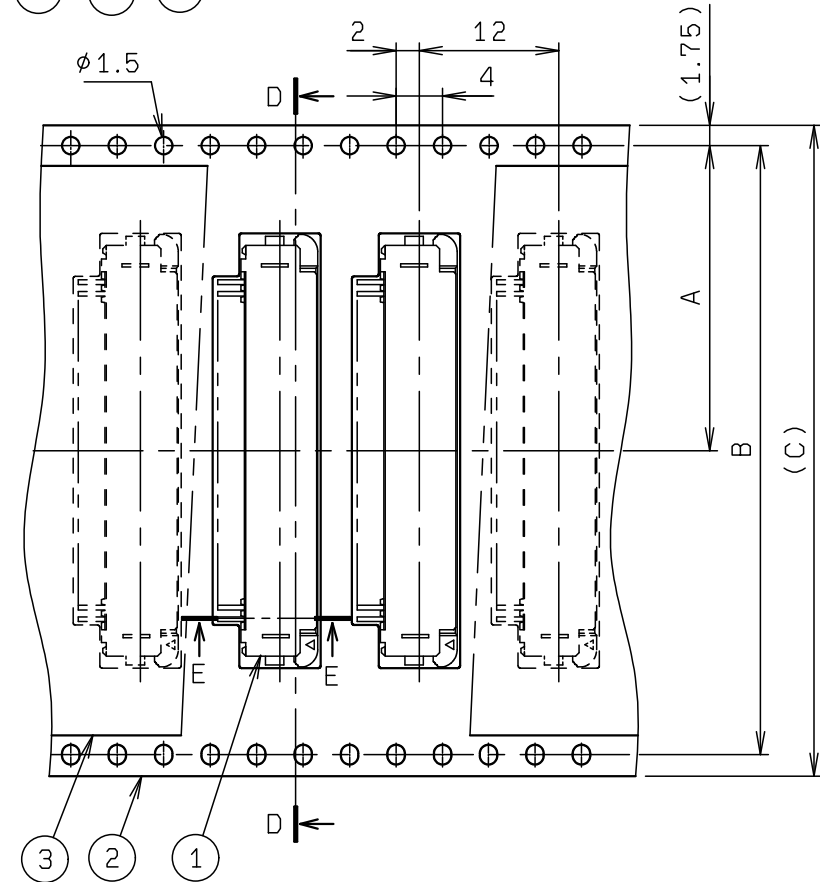


SECT. D-D
(12~30P)

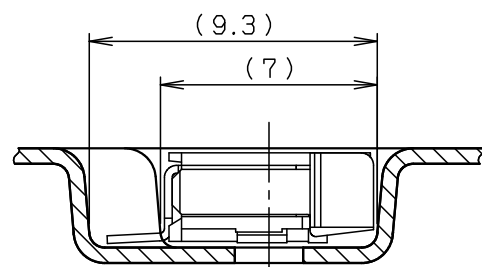

SECT. E-E (S=4:1)

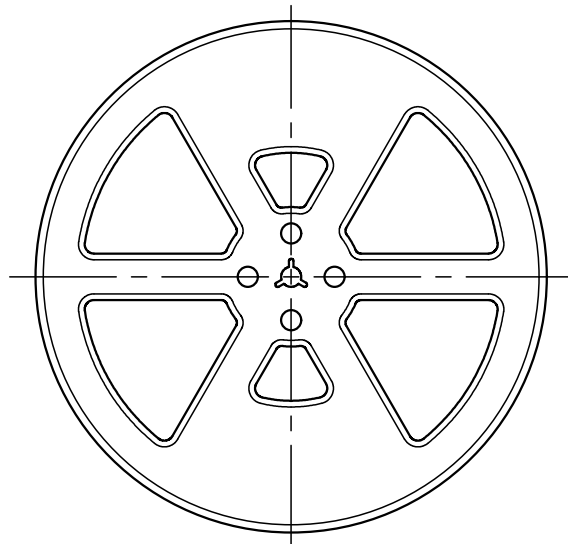

REEL DIMENSION (S=1:5)

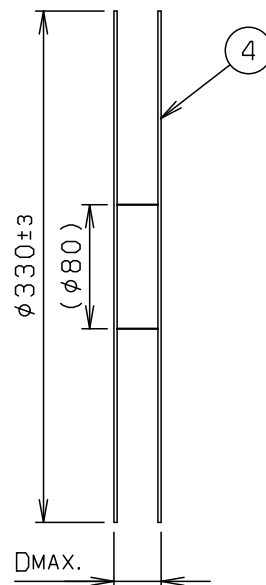


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	08 6224 0XX 002 829 +	1000			00 6224 0XX 002 829 +
2	EMBOSSD TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		


注 記
NOTE

1. 梱包数量 : 1000 個/リール
PACKING QUANTITY : 1000 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

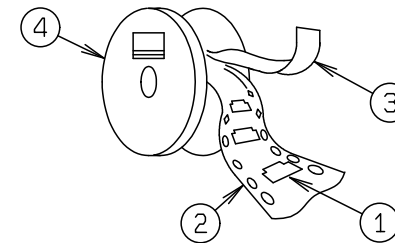

3. 引出し方向
USER DIRECTION OF FEED

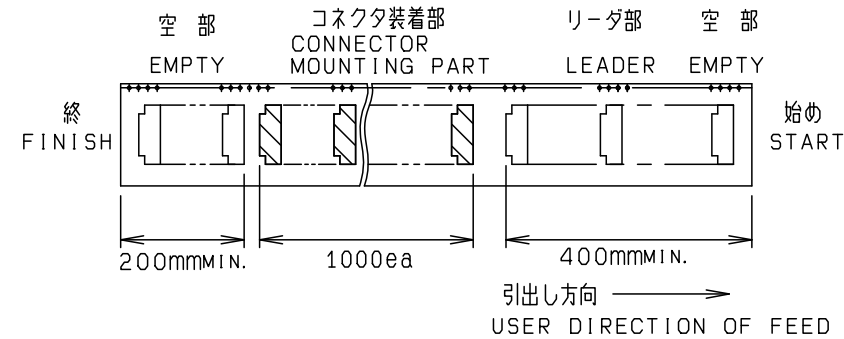

4. 型 番
P/N 08 6224 0XX 002 829 +
極 数
NO. OF POS.
めっきコード
PLATING CODE
829 + :AU PLATING
Sn-Cu PLATING(ANCHOR PLATE)

※この注記の1~3は2ページ目にも適用
※THIS NOTES 1 TO 3 ARE APPLICABLE TO
SHEET-2 ONLY.

極 数 NO. OF POS	A	B	C	D
5	11.5	—	24.0	30.4
6	11.5	—	24.0	30.4
7	11.5	—	24.0	30.4
8	11.5	—	24.0	30.4
9	11.5	—	24.0	30.4
10	11.5	—	24.0	30.4
11	11.5	—	24.0	30.4
12	14.2	28.4	32.0	38.4
13	14.2	28.4	32.0	38.4
14	14.2	28.4	32.0	38.4
15	14.2	28.4	32.0	38.4
16	14.2	28.4	32.0	38.4
17	20.2	40.4	44.0	50.4
18	20.2	40.4	44.0	50.4
19	20.2	40.4	44.0	50.4
20	20.2	40.4	44.0	50.4
21	20.2	40.4	44.0	50.4
22	20.2	40.4	44.0	50.4
23	20.2	40.4	44.0	50.4
24	20.2	40.4	44.0	50.4
25	20.2	40.4	44.0	50.4
26	20.2	40.4	44.0	50.4
27	20.2	40.4	44.0	50.4
28	26.2	52.4	56.0	62.4
29	26.2	52.4	56.0	62.4
30	26.2	52.4	56.0	62.4

※この表は2ページ目にも適用
※THIS CHART IS APPLICABLE TO
SHEET-2 ONLY.

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2		UNIT		ANGLE		REFER TO SHEET		1/2	
10 ≤ X < 30 ±0.25		mm		3RD		NO.		EDN/DCN	
30 ≤ X ±0.3		SCALE		DATE		DATE		ISSUE	
ANGLE / 角度		3 : 2		2005/05/07		PART NAME / 品名		CHECKED	
±3°		DRAWN		DESIGNED		CHECKED		APPROVED	
LI		N. KITAGAWA		A. HAGIWARA		N. HAYASHI		PART NO. / 型番	
								08 6224 0XX 002 829 +	
								DWG NO. / 図番	
								BJS 6224054	
								SHEET REV	
								12/2 C	

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

KYOCERA