


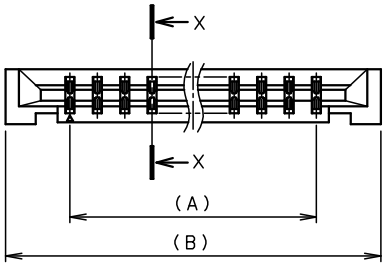


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	PA46		UL94V-0
2	CONTACT		N	PHOS-BRONZE		t=0.3 Sn-Cu
3	ANCHOR PLATE		2	PHOS-BRONZE		t=0.2 Sn-Cu

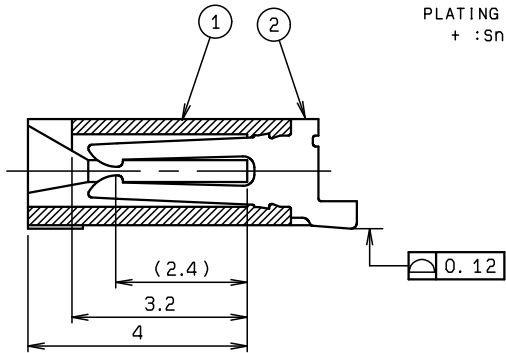


型番
P/N 00 6227 0XX 100 800 +
シリーズNO.
SERIES NO.
極数
NO OF POS.
めっき
PLATING
+ : Sn-Cu

極数 NO OF POS	A	B
4	3	7.7
5	4	8.7
6	5	9.7
7	6	10.7
8	7	11.7
9	8	12.7
10	9	13.7
11	10	14.7
12	11	15.7
13	12	16.7
14	13	17.7
15	14	18.7
16	15	19.7
17	16	20.7
18	17	21.7
19	18	22.7
20	19	23.7

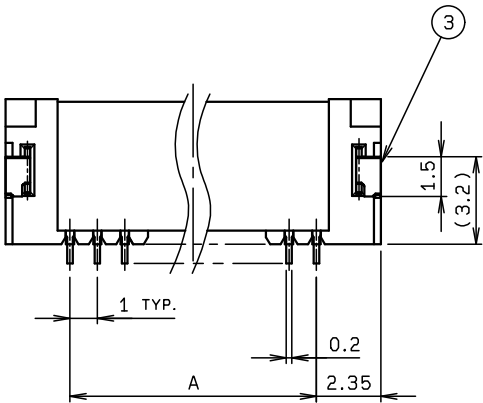


SECT. X-X (S=10/1)

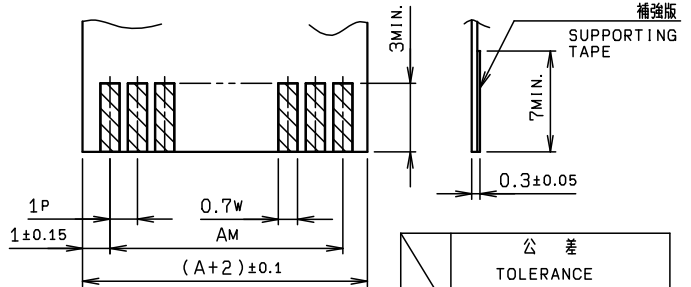

適用FPC/FFC
APPLICABLE FPC/FFC

	公差 TOLERANCE		
	P	W	M
FPC	±0.02	+0.07 -0.05	±0.05
FFC	±0.05	±0.03	±0.1

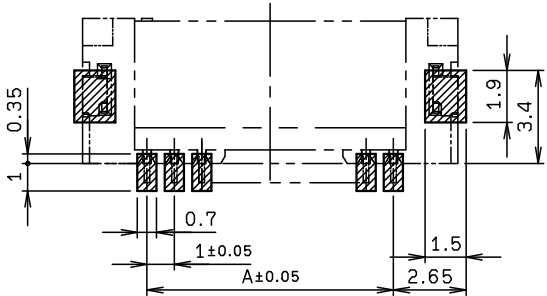

基板取付寸法 (コネクタ搭載面側)
MOUNTING LAYOUT (CONN. MOUNTING SIDE)

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格								
X <10 ±0.2 10≤ X <30 ±0.25 30≤ X ±0.3	UNIT		ANGLE		A		DCN-100		1-28-05	
	mm		3RD		O		EDN-909		11-17-03	
	SCALE		DATE		NO.		EDN/DCN		DATE	
	5 : 1		11-17-03		PART NAME / 品名		SERIES 6227 FPC FFC ASSY RA		1mmPITCH	
ANGLE / 角度 ±3°						ISSUE		CHECKED	APPROVED	
DRAWN LI	DESIGNED C. YAMATO	CHECKED	APPROVED K. ONO	PART NO. / 製品番 00 6227 0XX 100 800 +						
KYOCERA Corporation				DWG NO. / 図番 BJS 6227011					SHEET/REV 1/1 A	

KYOCERA

KYOCERA Corporation