
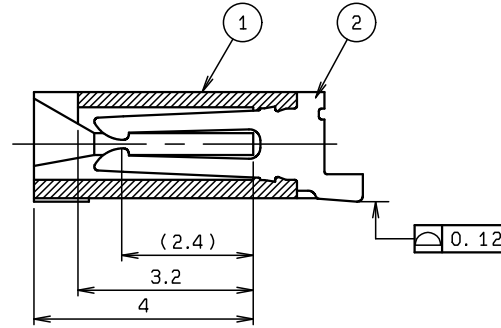
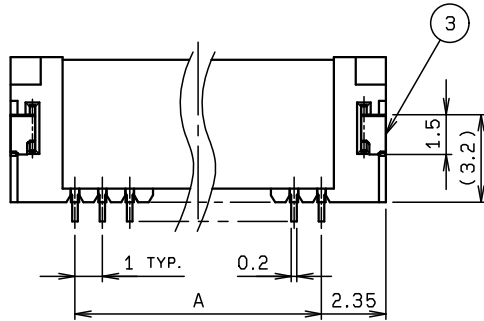




NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTANCE PLASTIC		UL94V-0
2	CONTACT		N	PHOS-BRONZE		t=0.3 AU
3	ANCHOR PLATE		2	PHOS-BRONZE		t=0.2 Sn-Cu

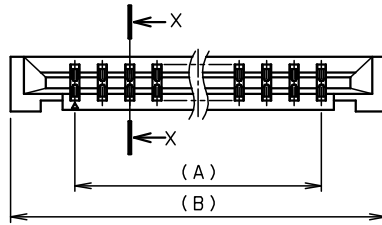

SECT. X-X (S=10:1)

極数 NO. OF POS	A	B
4	3.0	7.7
5	4.0	8.7
6	5.0	9.7
7	6.0	10.7
8	7.0	11.7
9	8.0	12.7
10	9.0	13.7
11	10.0	14.7
12	11.0	15.7
13	12.0	16.7
14	13.0	17.7
15	14.0	18.7
16	15.0	19.7
17	16.0	20.7
18	17.0	21.7
19	18.0	22.7
20	19.0	23.7

※この表は1ページ目のみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 ONLY.

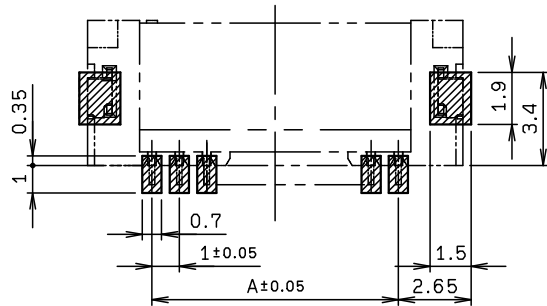


基板取付寸法 (コネクタ搭載面側)
MOUNTING LAYOUT (CONN. MOUNTING SIDE)

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		E	DCN20466	2020/05/08	S. MORITA	Y. MANBA	Y. FUJII
X < 10 ±0.2				D	DCN-138	2011/02/24	G. IKEDA		T. SATOH
10 ≤ X < 30 ±0.25				O	EDN-1264	2004/11/30	G. SAGARA	A. HAGIWARA	N. HAYASHI
30 ≤ X ±0.3				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE 5 : 1		PART NAME / 品名					
		DATE 2004/11/30		SERIES 6227 FPC FFC ASSY RA					
DRAWN C. YAMATO		DESIGNED G. SAGARA		1mm PITCH					
		CHECKED A. HAGIWARA		PART NO. / 製番					
		APPROVED N. HAYASHI		04 6227 0XX 100 829 +					
				DWG NO. / 図番					
				BJS 6227019					
				SHEET/REV 1/3 E					

KYOCERA

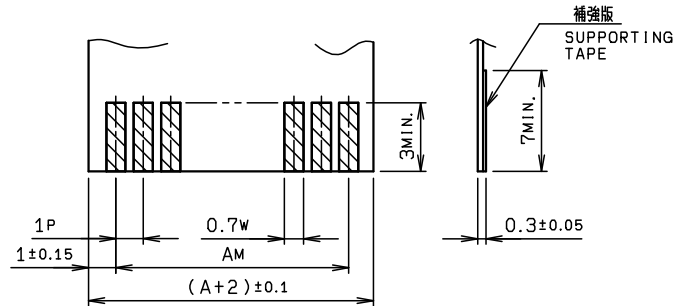


適用FPC/FFC寸法
APPLICABLE FPC/FFC


種類 KIND	公差 TOLERANCE		
	P	W	M
FPC	±0.02	+0.07 -0.05	±0.05
FFC	±0.05	±0.03	±0.1

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
-----	-------------	----------	-----	----------	---------	---------

FPC構成
FPC STRUCTURE
(推奨仕様)





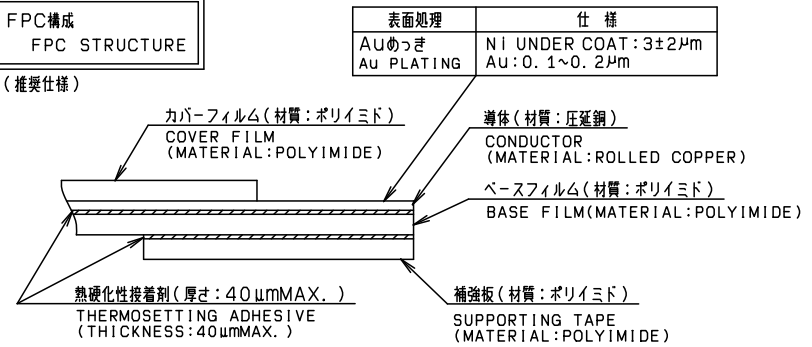


FFC構成
FFC STRUCTURE
(推奨仕様)

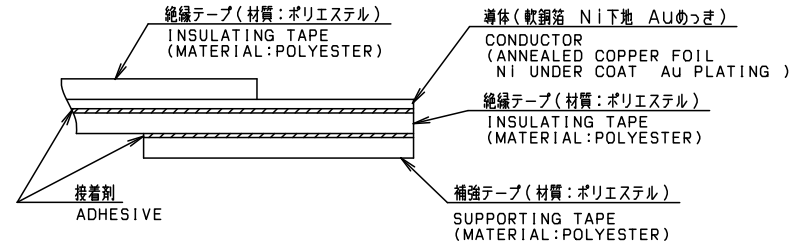


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2 10 ≤ X <30 ±0.25 30 ≤ X ±0.3	UNIT mm		ANGLE 3RD	REFER TO SHEET 1/3					
	SCALE NTS		DATE 2004/11/30	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
	ANGLE / 角度 ±3°			PART NAME / 品名 SERIES 6227 FPC FFC ASSY RA 1mmPITCH					
DRAWN C. YAMATO	DESIGNED G. SAGARA	CHECKED A. HAGIWARA	APPROVED N. HAYASHI	PART NO. / 製番 04 6227 0XX 100 829 +					
KYOCERA				DWG NO. / 図番 BJS 6227019				SHEET/REV 2/3 E	

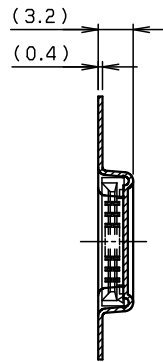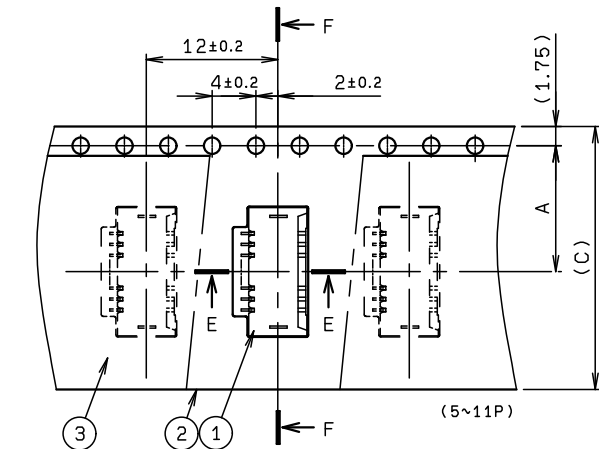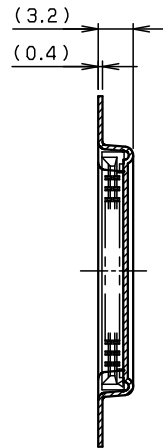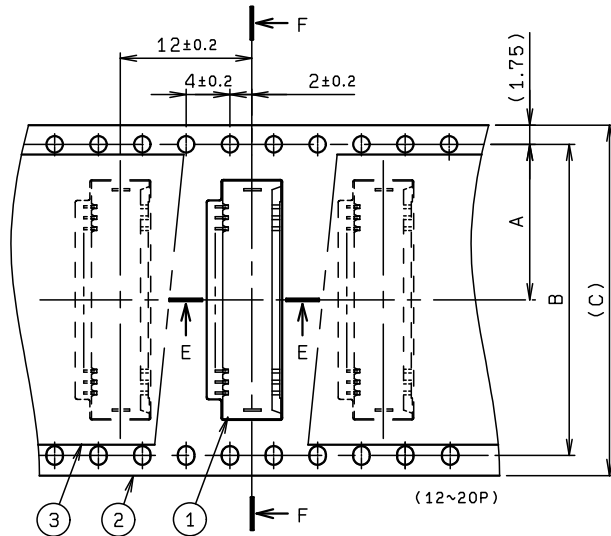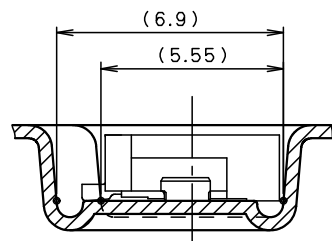SECT. F-F
(5~11P)SECT. F-F
(12~20P)

SECT. E-E (S=6:1)

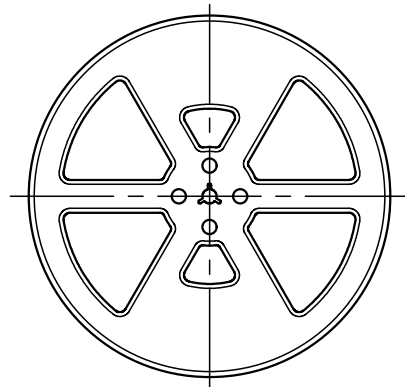

REEL DIMENSION (S=1:5)

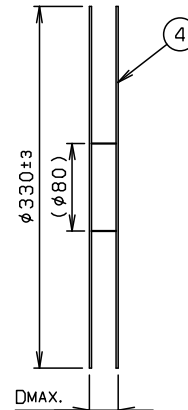


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6227 0XX 100 829 +	1000			
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		


注 記
NOTE

1. 梱包数量 : 1000 個/リール
PACKING QUANTITY : 1000 ea/reel

2. 納入時のリール巻方向
DIRECTION OF REEL



3. 引出し方向
USER DIRECTION OF FEED

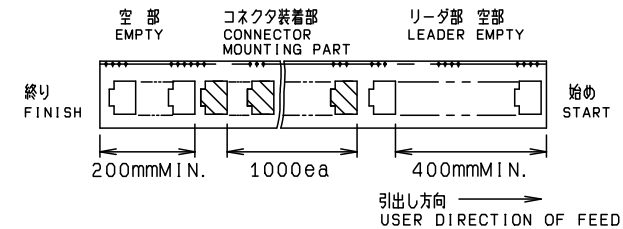

4. 型番
P/N 04 6227 0XX 100 829 +

極数
NO OF POS.

めっき
PLATING
829 +:Au(ANCHOR PLATE:Sn-Cu)

※この注記の1~3は3ページ目にはみ適用

※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-2 ONLY.

極数 NO. OF POS.	A	B	C	D
4	11.5	-	24.0	30.4
5	11.5	-	24.0	30.4
6	11.5	-	24.0	30.4
7	11.5	-	24.0	30.4
8	11.5	-	24.0	30.4
9	11.5	-	24.0	30.4
10	11.5	-	24.0	30.4
11	11.5	-	24.0	30.4
12	14.2	28.4	32.0	38.4
13	14.2	28.4	32.0	38.4
14	14.2	28.4	32.0	38.4
15	14.2	28.4	32.0	38.4
16	14.2	28.4	32.0	38.4
17	14.2	28.4	32.0	38.4
18	14.2	28.4	32.0	38.4
19	20.2	40.4	44.0	50.4
20	20.2	40.4	44.0	50.4

※この表は3ページ目にはみ適用

※THIS CHART IS APPLICABLE TO SHEET-3 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2 10≤ X <30 ±0.25 30≤ X ±0.3	UNIT mm		ANGLE 3RD	REFER TO SHEET 1/3					
	SCALE 2 : 1		DATE 2004/11/30	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
	PART NAME / 品名 EMBOSS TAPE ASSY FPC FFC ASSY RA								
DRAWN C. YAMATO	DESIGNED G. SAGARA	CHECKED A. HAGIWARA	APPROVED N. HAYASHI	PART NO. / 型番 04 6227 0XX 100 829 +					
				DWG NO. / 図番 BJS 6227019				SHEET/REV 3/3 E	