

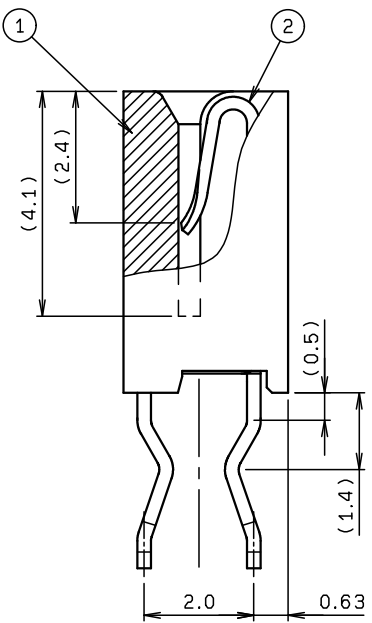
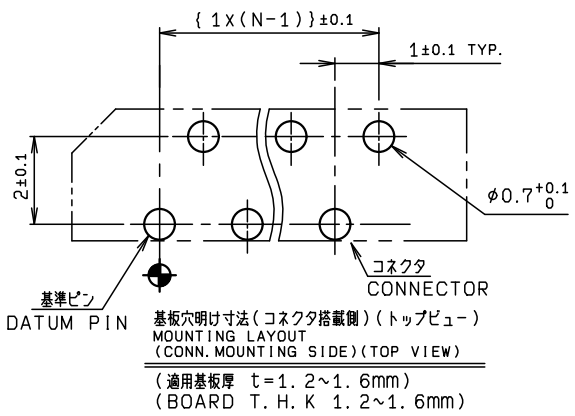
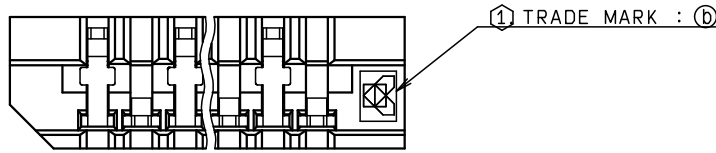
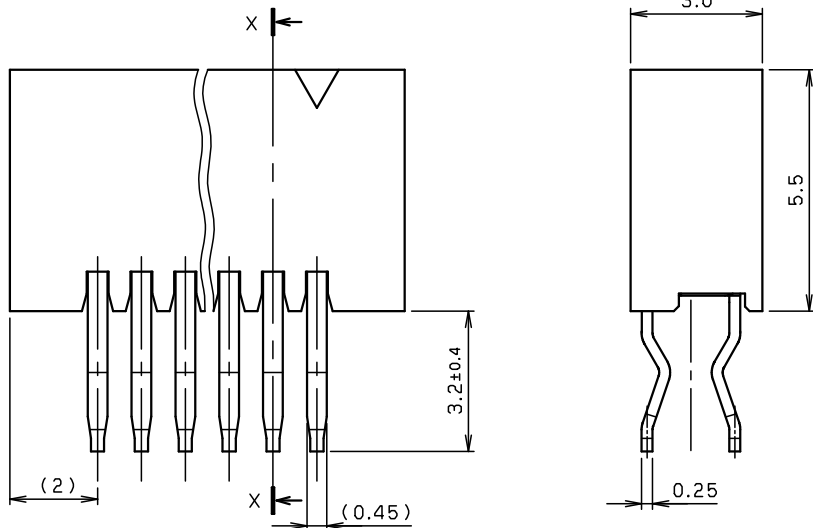


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	PA66 PPS		COLOR:BLACK
2	CONTACT		N	PHOS-BRONZE		Sn PLATED, t=0.25

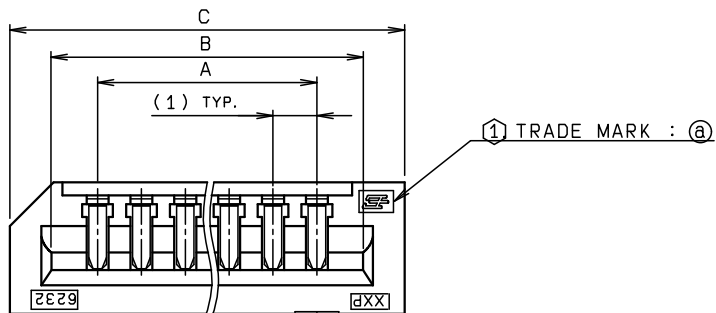

SECT. X-X (S=10/1)

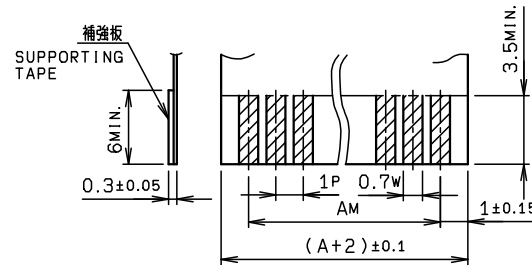

適用 FPC/FFC
APPLICABLE FPC/FFC

極数 NO. OF POS	A	B	C
3	2.0	4.1	6.0
4	3.0	5.1	7.0
5	4.0	6.1	8.0
6	5.0	7.1	9.0
7	6.0	8.1	10.0
8	7.0	9.1	11.0
9	8.0	10.1	12.0
10	9.0	11.1	13.0
11	10.0	12.1	14.0
12	11.0	13.1	15.0
13	12.0	14.1	16.0
14	13.0	15.1	17.0
15	14.0	16.1	18.0
16	15.0	17.1	19.0
17	16.0	18.1	20.0
18	17.0	19.1	21.0
19	18.0	20.1	22.0
20	19.0	21.1	23.0
21	20.0	22.1	24.0
22	21.0	23.1	25.0
23	22.0	24.1	26.0
24	23.0	25.1	27.0
25	24.0	26.1	28.0
26	25.0	27.1	29.0
27	26.0	28.1	30.0
28	27.0	29.1	31.0
29	28.0	30.1	32.0
30	29.0	31.1	33.0

種類 KIND	公差 TOLERANCE		
	P	W	M
FPC	±0.02	+0.1 -0.05	±0.05
FFC	±0.05	±0.03	±0.1

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		J	DCN-065	1-20-06			
X < 10 ±0.2				H	DCN-1292	9-15-04	K. MURAKAMI	A. HAGIWARA	N. HAYASHI
10 ≤ X < 30 ±0.25		UNIT mm		O	EDN-372	7-10-95	K. UCHIDA	N. HAYASHI	M. AOKI
30 ≤ X ±0.3		ANGLE 3RD		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE NTS		PART NAME / 品名					
		DATE 7-10-95		SERIES 6232 FPC FFC ASSY ST DIP					
DRAWN Y. OHISHI		DESIGNED K. UCHIDA		1mm PITCH LIF (WITH KINK)					
CHECKED N. HAYASHI		APPROVED M. AOKI		PART NO. / 型番					
				00 6232 0XX 006 800 +					
				DWG NO. / 図番					
				BJS 6232010					
				SHEET/REV					
				1/1 J					

KYOCERA Corporation