




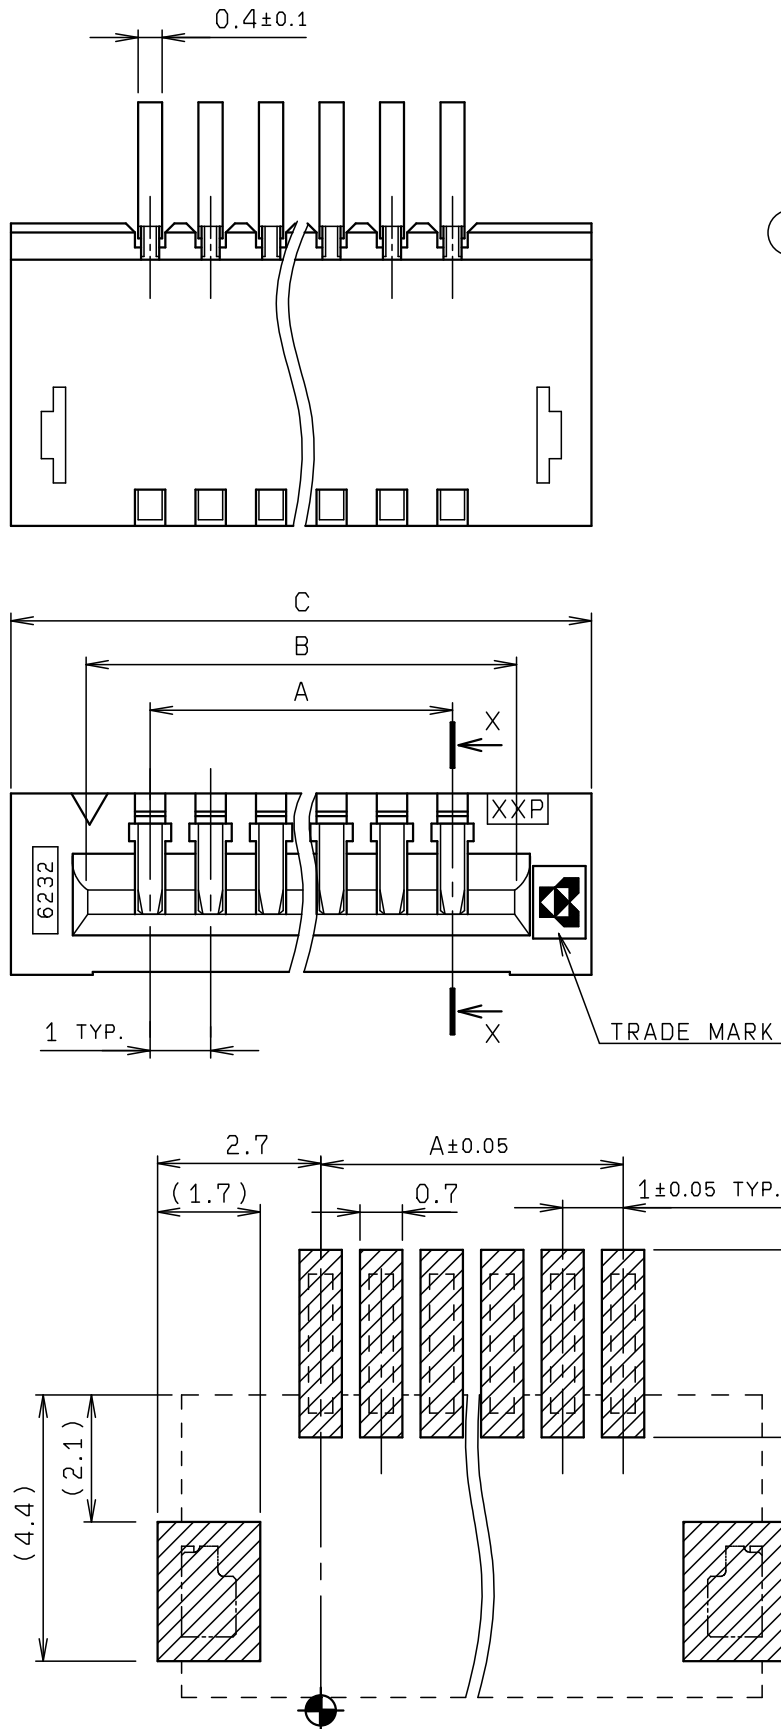

基板取付け寸法 (コネクタ搭載側)
MONTING LAYOUT (CONN. MOUNTING SIDE)

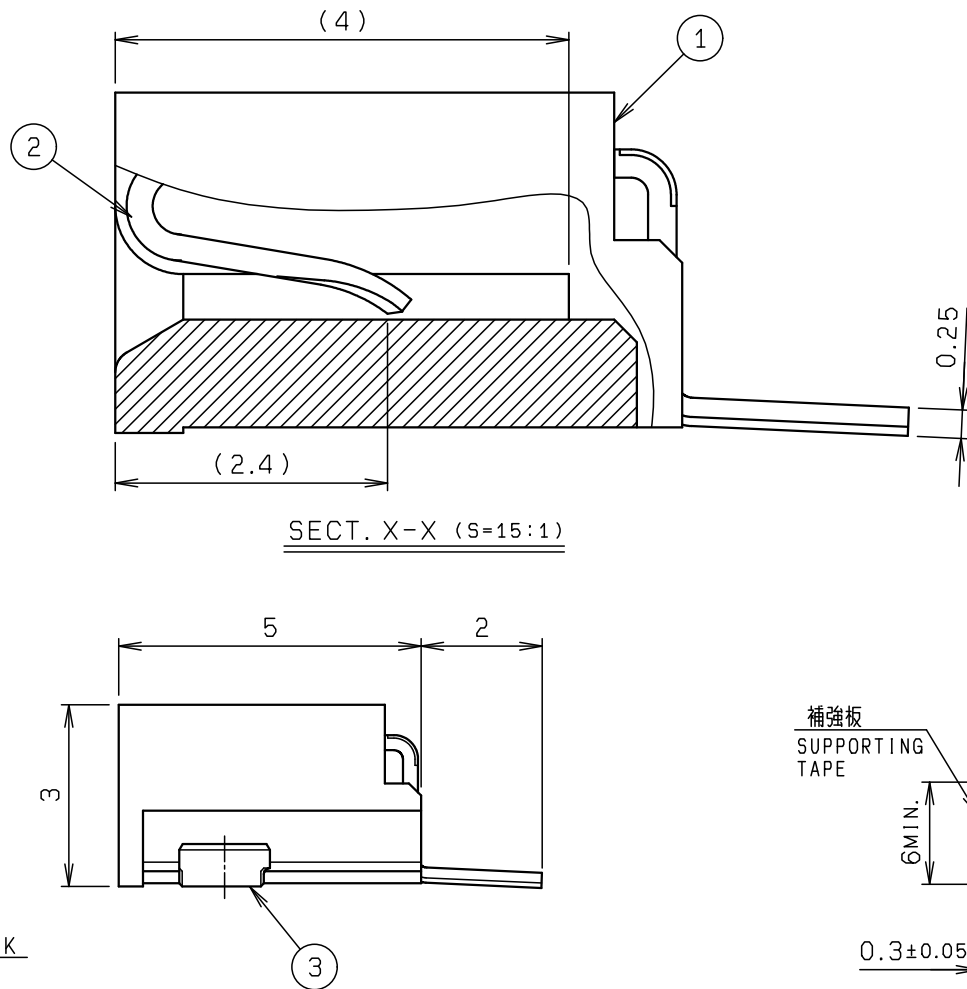

SECT. X-X (S=15:1)

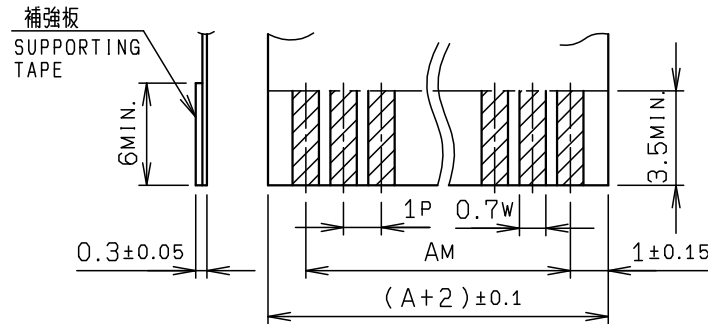

種類 KIND	公差 TOLERANCE		
	P	W	M
FPC	±0.02	+0.1 -0.05	±0.05
FFC	±0.05	±0.03	±0.1

適用 FPC/FFC
APPLICABLE FPC/FFC

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTING RESIN		UL94V-0 COLOR: BLACK
2	CONTACT		N	PHOS-BRONZE		t=0.25 Sn-Cu
3	ANCHOR PLATE		N	PHOS-BRONZE		t=0.2 Sn-Cu


極数 NO. OF POS.	A	B	C
3	2.0	4.1	6.6
4	3.0	5.1	7.6
5	4.0	6.1	8.6
6	5.0	7.1	9.6
7	6.0	8.1	10.6
8	7.0	9.1	11.6
9	8.0	10.1	12.6
10	9.0	11.1	13.6
11	10.0	12.1	14.6
12	11.0	13.1	15.6
13	12.0	14.1	16.6
14	13.0	15.1	17.6
15	14.0	16.1	18.6
16	15.0	17.1	19.6
17	16.0	18.1	20.6
18	17.0	19.1	21.6
19	18.0	20.1	22.6
20	19.0	21.1	23.6
21	20.0	22.1	24.6
22	21.0	23.1	25.6
23	22.0	24.1	26.6
24	23.0	25.1	27.6
25	24.0	26.1	28.6
26	25.0	27.1	29.6
27	26.0	28.1	30.6
28	27.0	29.1	31.6
29	28.0	30.1	32.6
30	29.0	31.1	33.6

※この表は1ページ目にも適用
※THIS CHART IS APPLICABLE TO SHEET-1 ONLY.


TOLERANCE / 一般公差(S) ±0.3		PRODUCT SPEC / 製品規格 _____		C	DCN25044	2025/01/29	S. MORITA		Y. TSURUOKA		
				B	DCN20900	2020/10/02	N. KITAGAWA		M. YOSHIDA		
				O	EDN-759	2003/10/02	C. YAMATO		K. ONO		
		UNIT mm		ANGLE 3RD		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
		SCALE NTS		DATE 2003/10/02		PART NAME / 品名 SERIES 6232 FPC FFC ASSY RA SMT UPPER CONTACT TYPE					
DRAWN T. KOMATSU	DESIGNED C. YAMATO	CHECKED	APPROVED K. ONO	PART NO. / 型番 04 6232 1XX 10X 800 +							
				DWG NO. / 図番 BJS 6232163				SHEET/REV 1/3 C			

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS




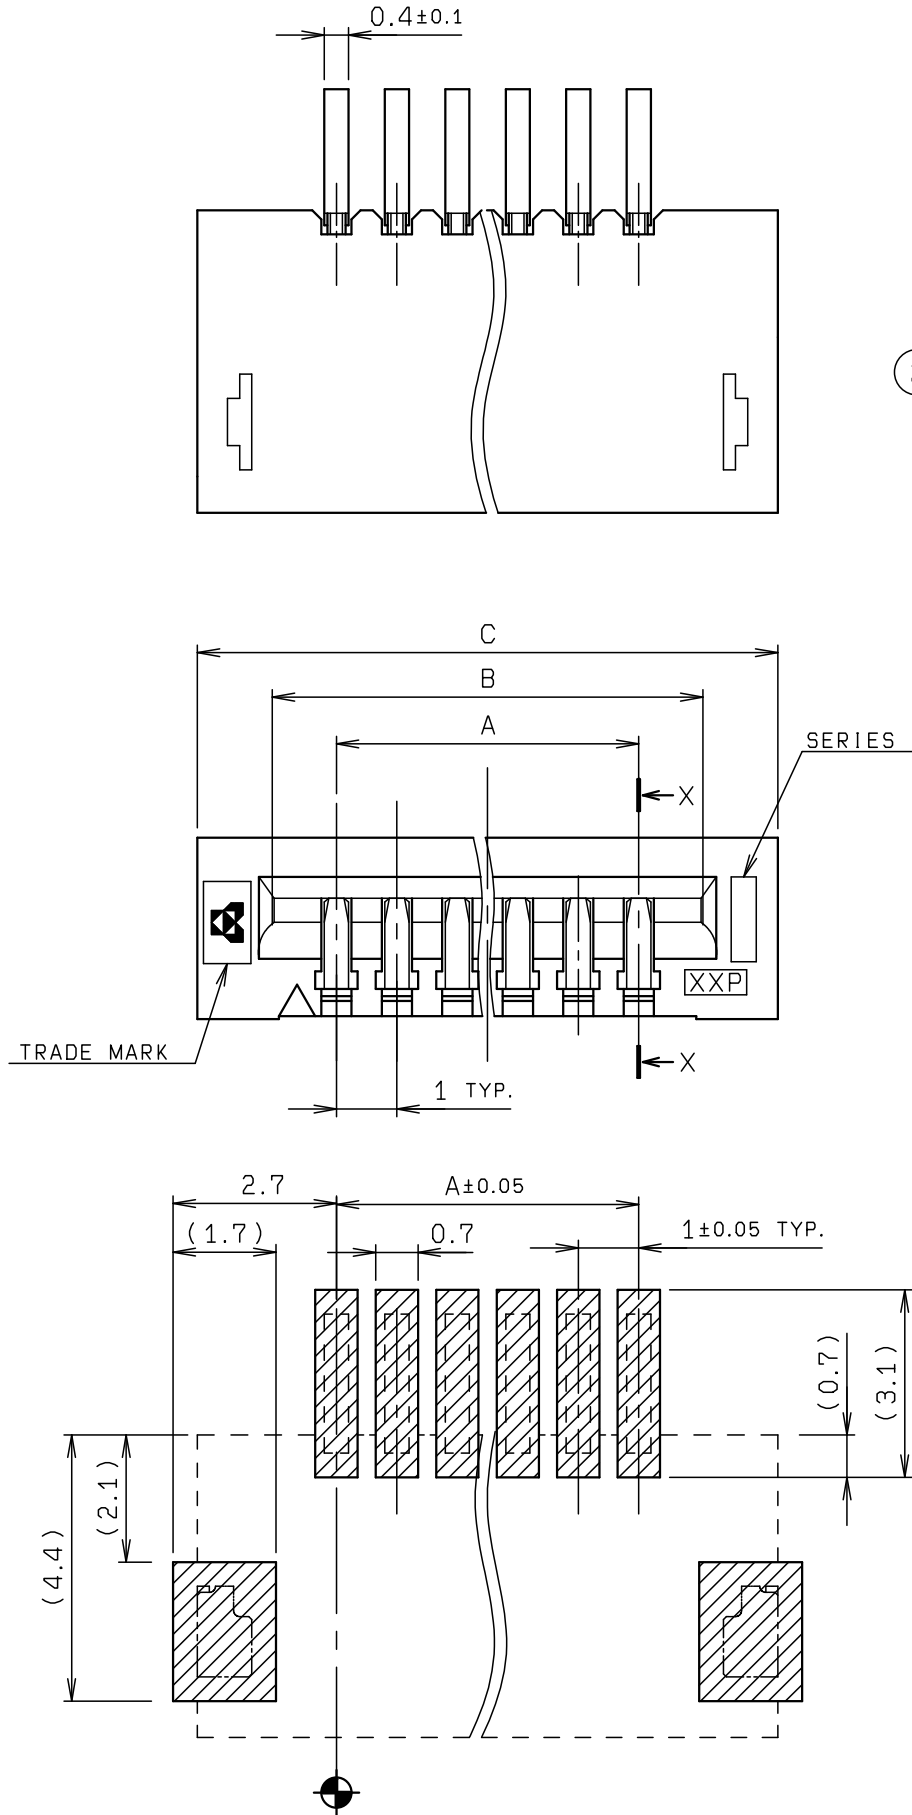

基板取付け寸法（コネクタ搭載側）
MONTING LAYOUT (CONN. MOUNTING SIDE)

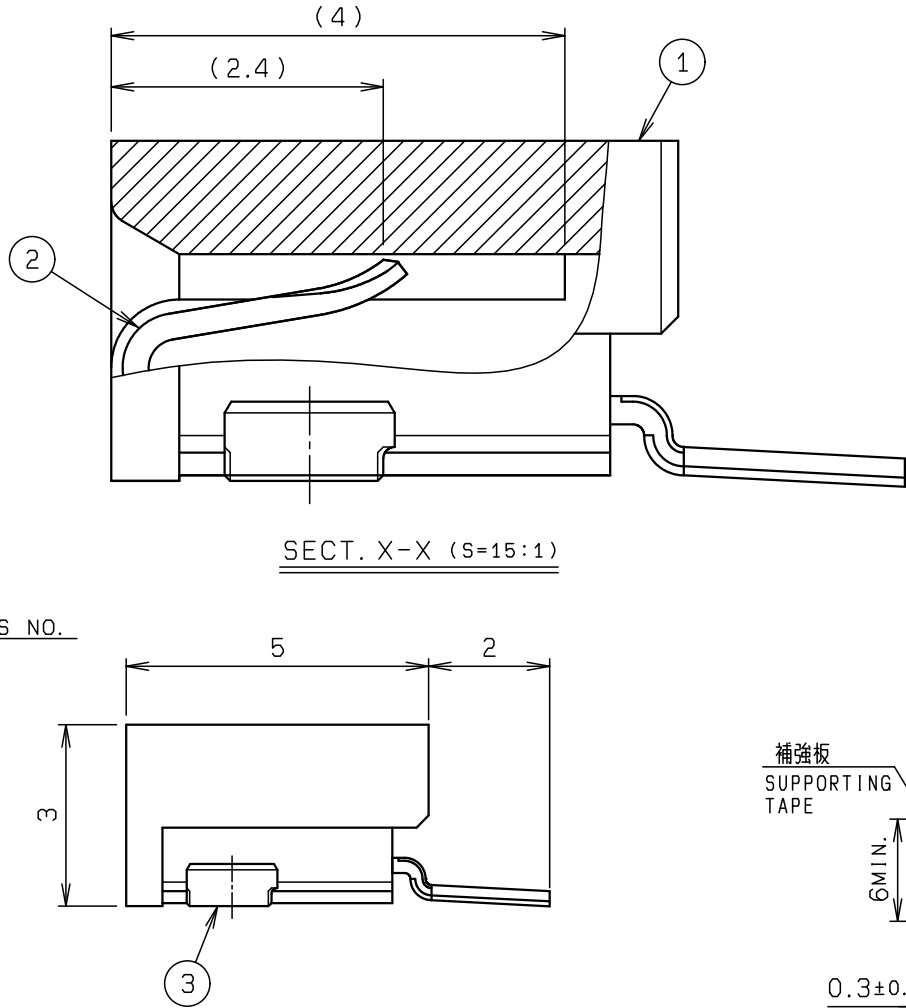

SECT. X-X (S=15:1)

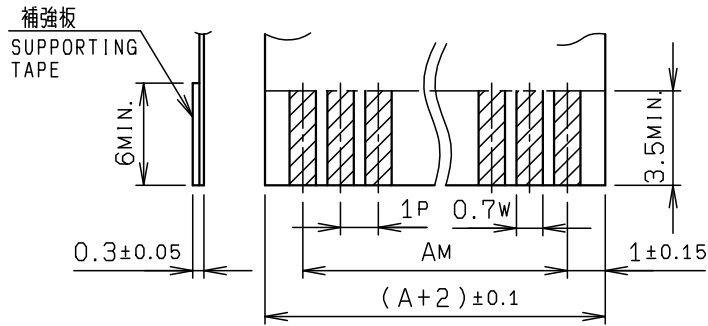

種類 KIND	公差 TOLERANCE		
	P	W	M
FPC	±0.02	+0.1 -0.05	±0.05
FFC	±0.05	±0.03	±0.1

適用 FPC/FFC
APPLICABLE FPC/FFC

極数 NO. OF POS.	A	B	C
3	2.0	4.1	6.6
4	3.0	5.1	7.6
5	4.0	6.1	8.6
6	5.0	7.1	9.6
7	6.0	8.1	10.6
8	7.0	9.1	11.6
9	8.0	10.1	12.6
10	9.0	11.1	13.6
11	10.0	12.1	14.6
12	11.0	13.1	15.6
13	12.0	14.1	16.6
14	13.0	15.1	17.6
15	14.0	16.1	18.6
16	15.0	17.1	19.6
17	16.0	18.1	20.6
18	17.0	19.1	21.6
19	18.0	20.1	22.6
20	19.0	21.1	23.6
21	20.0	22.1	24.6
22	21.0	23.1	25.6
23	22.0	24.1	26.6
24	23.0	25.1	27.6
25	24.0	26.1	28.6
26	25.0	27.1	29.6
27	26.0	28.1	30.6
28	27.0	29.1	31.6
29	28.0	30.1	32.6
30	29.0	31.1	33.6



※この表は2ページ目にのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-2 ONLY.

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTING RESIN		UL94V-0 COLOR: BROWN
2	CONTACT		N	PHOS-BRONZE		t=0.25 Sn-Cu
3	ANCHOR PLATE		N	PHOS-BRONZE		t=0.2 Sn-Cu



TOLERANCE / 一般公差 (S) ±0.3		PRODUCT SPEC / 製品規格							
		UNIT mm	ANGLE 3RD	REFER TO SHEET 1/3					
		SCALE NTS	DATE 2003/10/02	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
		PART NAME / 品名 SERIES 6232 FPC FFC ASSY RA SMT BOTTOM CONTACT TYPE							
DRAWN T. KOMATSU	DESIGNED C. YAMATO	CHECKED	APPROVED K. ONO	PART NO. / 型番 04 6232 1XX 10X 800 +					
DWG NO. / 図番 BJS 6232163				SHEET / REV 2/3 C					




ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

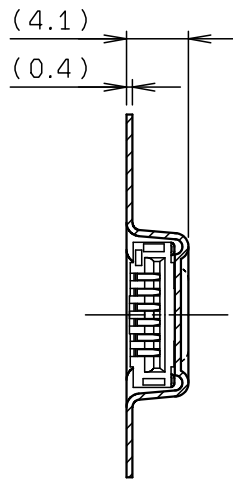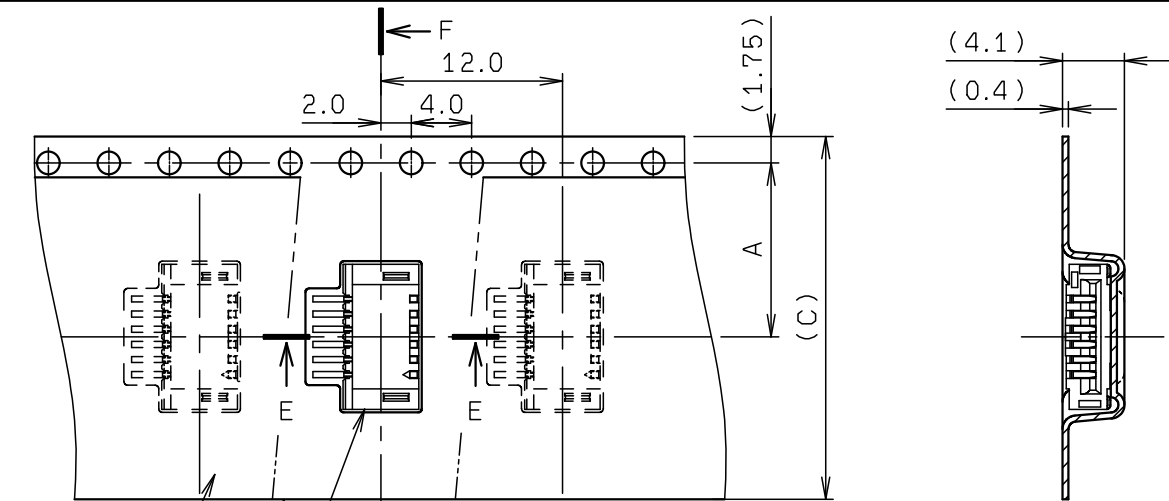


SECT. F-F
(3~10P)

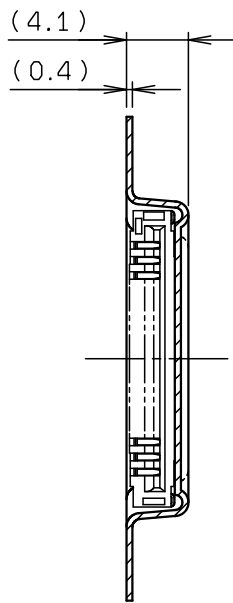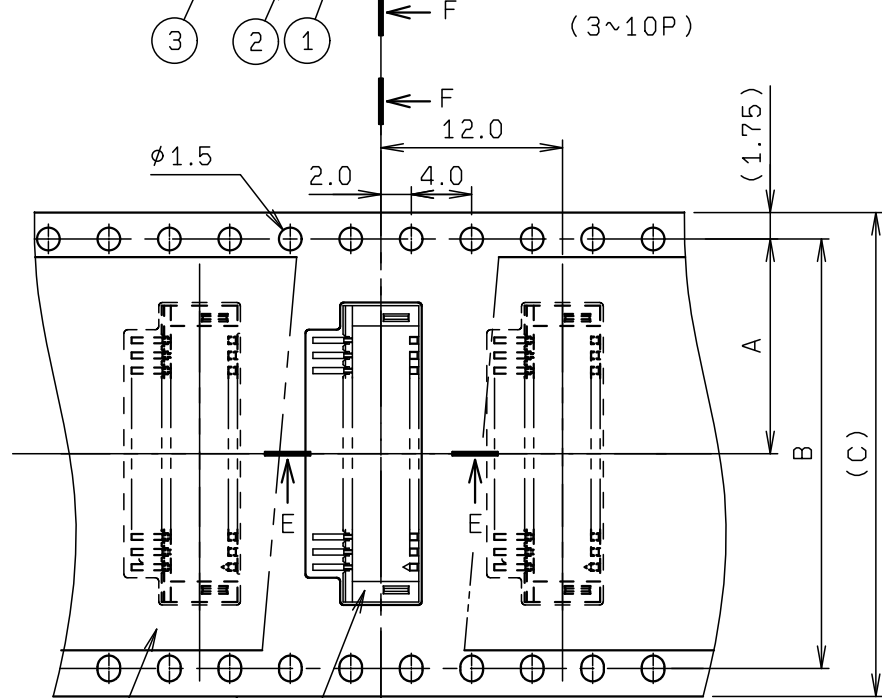

SECT. F-F
(11~30P)

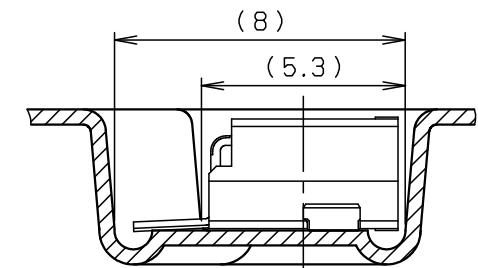


上接点タイプ
UPPER CONTACT TYPE
コネクタ型番: 00 6232 1XX 103 800 +
CONTACT P/N

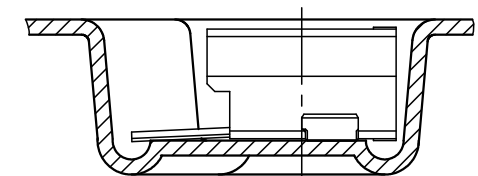


下接点タイプ
BOTTOM CONTACT TYPE
コネクタ型番: 00 6232 1XX 102 800 +
CONTACT P/N

SECT. E-E (S=5:1)

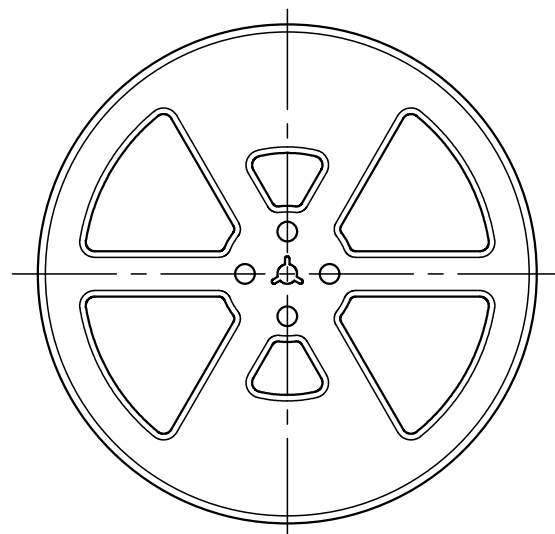

REEL DIMENSION (S=1:5)

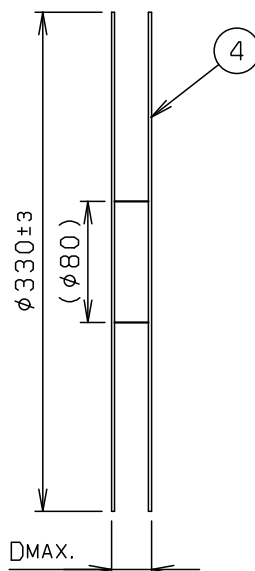


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6232 1XX 10X 800 +	1000			00 6232 1XX 10X 800 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		


注 記
NOTE

1. 梱包数量 : 1000 個/リール
PACKING QUANTITY : 1000 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

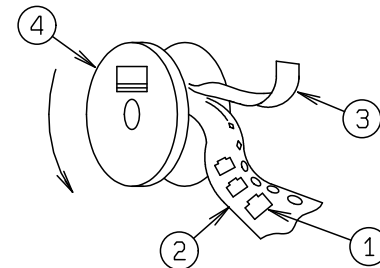

3. 引出し方向
USER DIRECTION OF FEED

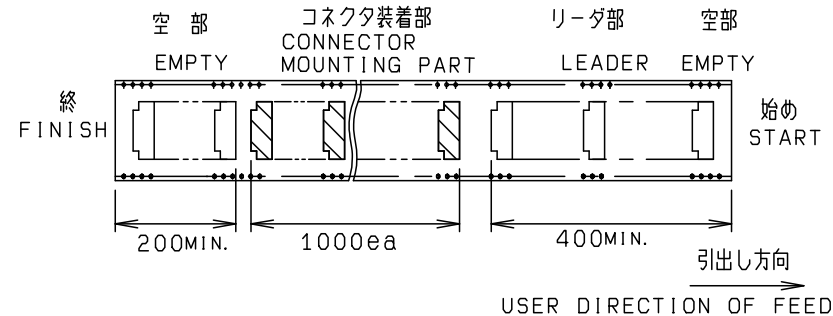

※この注記は3ページ目にも適用
※THIS NOTE IS APPLICABLE TO SHEET-3 ONLY.

型 番
P/N 04 6232 1XX 10X 800 +

極 数
NO. OF POS.
3~30P

バリエーション
VARIATION

- 2 : 下接点タイプ ボス無し
BOTTOM CONTACT TYPE WITHOUT BOSS
3 : 上接点タイプ ボス無し
UPPER CONTACT TYPE WITHOUT BOSS

めっきコート
PLATING CODE
800 + : Sn-Cu

極 数 NO. OF POS.	A	B	C	D
3	11.5	—	24.0	30.4
4	11.5	—	24.0	30.4
5	11.5	—	24.0	30.4
6	11.5	—	24.0	30.4
7	11.5	—	24.0	30.4
8	11.5	—	24.0	30.4
9	11.5	—	24.0	30.4
10	11.5	—	24.0	30.4
11	14.2	28.4	32.0	38.4
12	14.2	28.4	32.0	38.4
13	14.2	28.4	32.0	38.4
14	14.2	28.4	32.0	38.4
15	14.2	28.4	32.0	38.4
16	14.2	28.4	32.0	38.4
17	14.2	28.4	32.0	38.4
18	14.2	28.4	32.0	38.4
19	20.2	40.4	44.0	50.4
20	20.2	40.4	44.0	50.4
21	20.2	40.4	44.0	50.4
22	20.2	40.4	44.0	50.4
23	20.2	40.4	44.0	50.4
24	20.2	40.4	44.0	50.4
25	20.2	40.4	44.0	50.4
26	26.2	52.4	56.0	62.4
27	26.2	52.4	56.0	62.4
28	26.2	52.4	56.0	62.4
29	26.2	52.4	56.0	62.4
30	26.2	52.4	56.0	62.4

※この表は3ページ目にも適用
※THIS CHART IS APPLICABLE TO
SHEET-3 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格					
±0.3							
		UNIT mm	ANGLE 3RD	REFER TO SHEET 1/3			
		SCALE 2 : 1	DATE 2003/10/02	NO.	EDN/DCN	DATE	ISSUE
				PART NAME / 品名			
				SERIES 6232 EMBOSS TAPE ASSY FPC FFC ASSY RA SMT			
DRAWN T. KOMATSU		DESIGNED C. YAMATO		CHECKED		APPROVED K. ONO	
				PART NO. / 型番			
				04 6232 1XX 10X 800 +			
				DWG NO. / 図番			
				BJS 6232163			
				SHEET/REV			
				13/3		C	

KYOCERA