

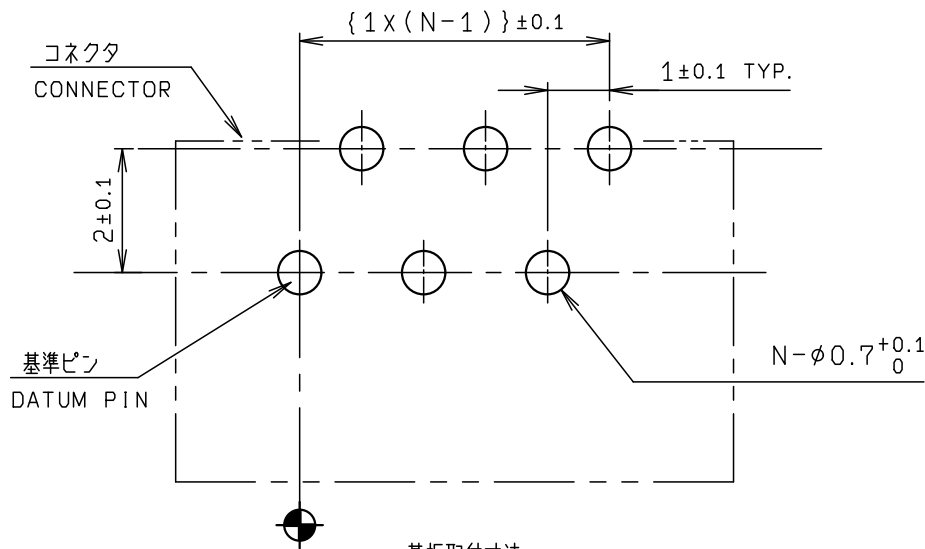
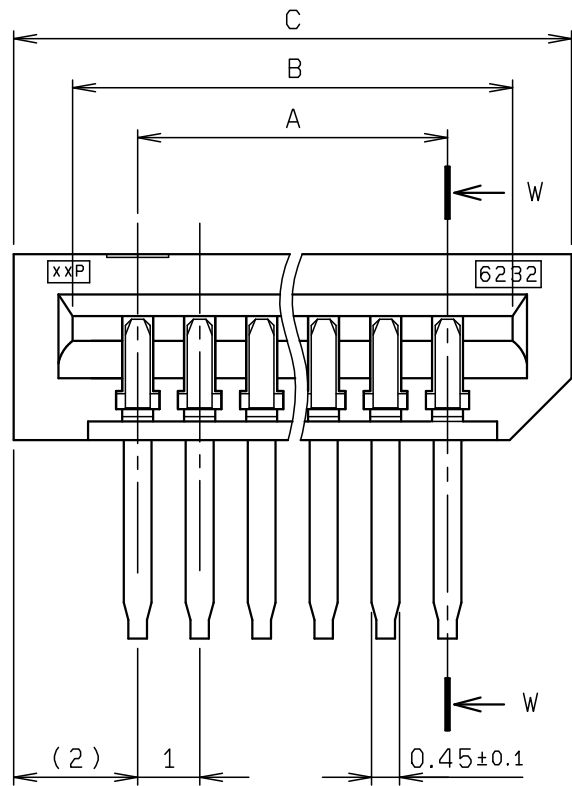
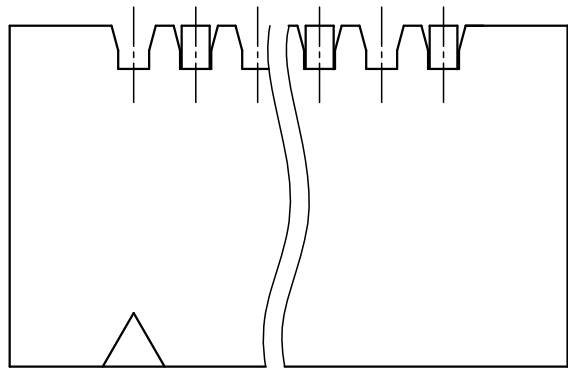
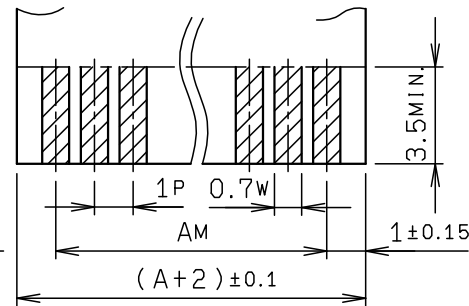



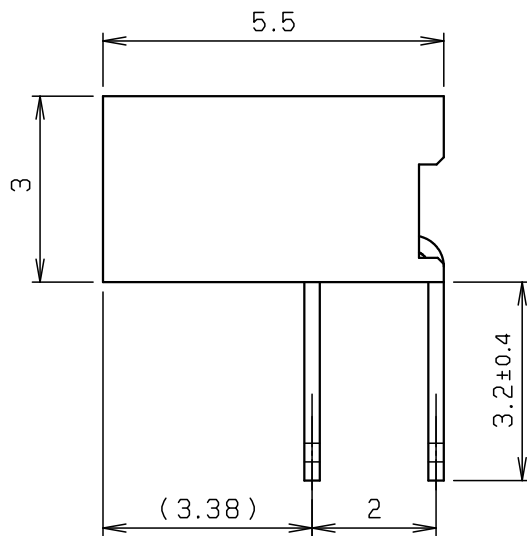

基板取付寸法
MOUNTING LAYOUT
(t=1.2~1.6)

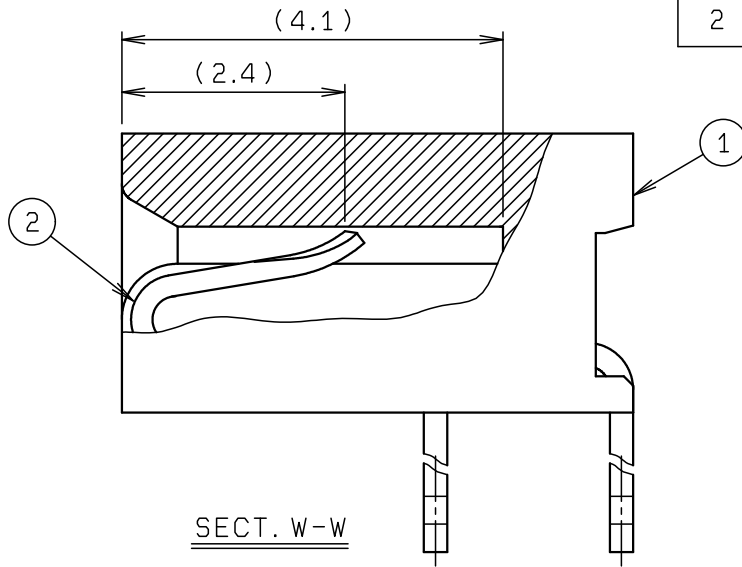

型番
P/N 00 6232 0XX 104 800 +
極数
NO. OF POS.
めっき
PLATING
+ : Sn-Cu

種類 KIND	公差 TOLERANCE		
	P	W	M
FPC	±0.02	+0.1 -0.05	±0.05
FFC	±0.05	±0.03	±0.1

適用 FPC/FFC
APPLICABLE FPC/FFC

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2 10≤ X <30 ±0.25 30≤ X ±0.3				A	DCN19787	2019/10/18	R. MANABE	N. KITAGAWA	Y. FUJII
				O	EDN-187	2005/02/17	K. MURAKAMI	A. HAGIWARA	N. HAYASHI
	UNIT		ANGLE	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
	mm		3RD						
SCALE		DATE		PART NAME / 品名					
NTS		2005/02/17		SERIES 6232 FPC FFC ASSY RA DIP					
ANGLE / 角度		±3°		LIF BOTTOM CONT. TYPE WITHOUT KINK					
DRAWN	DESIGNED	CHECKED	APPROVED	PART NO. / 型番					
T. KOMATSU	K. MURAKAMI	A. HAGIWARA	N. HAYASHI	00 6232 0XX 104 800 +					
				DWG NO. / 図番				SHEET/REV	
				BJS 6232230				1/1 A	

極数 NO. OF POS.	A	B	C
3	2.0	4.1	6.0
4	3.0	5.1	7.0
5	4.0	6.1	8.0
6	5.0	7.1	9.0
7	6.0	8.1	10.0
8	7.0	9.1	11.0
9	8.0	10.1	12.0
10	9.0	11.1	13.0
11	10.0	12.1	14.0
12	11.0	13.1	15.0
13	12.0	14.1	16.0
14	13.0	15.1	17.0
15	14.0	16.1	18.0
16	15.0	17.1	19.0
17	16.0	18.1	20.0
18	17.0	19.1	21.0
19	18.0	20.1	22.0
20	19.0	21.1	23.0
21	20.0	22.1	24.0
22	21.0	23.1	25.0
23	22.0	24.1	26.0
24	23.0	25.1	27.0
25	24.0	26.1	28.0
26	25.0	27.1	29.0
27	26.0	28.1	30.0
28	27.0	29.1	31.0
29	28.0	30.1	32.0
30	29.0	31.1	33.0

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTING RESIN		COLOR: BLACK
2	CONTACT		N	PHOS-BRONZE		t=0.25 Sn PLATED