

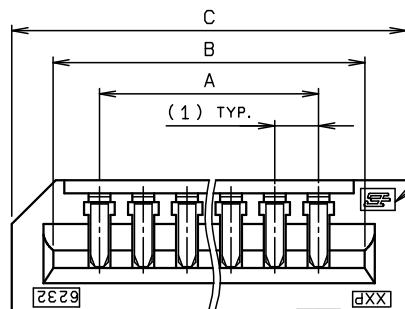
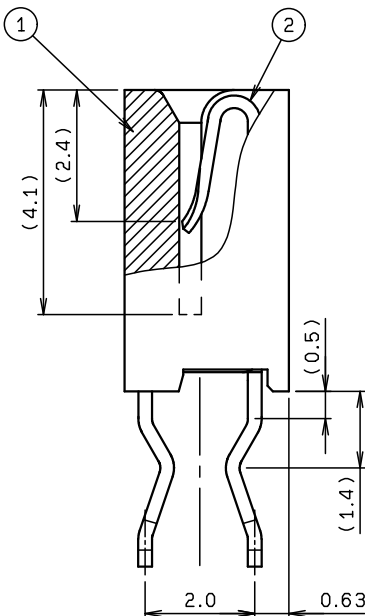


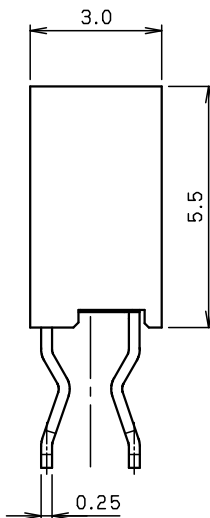

① TRADE MARK : ⑧

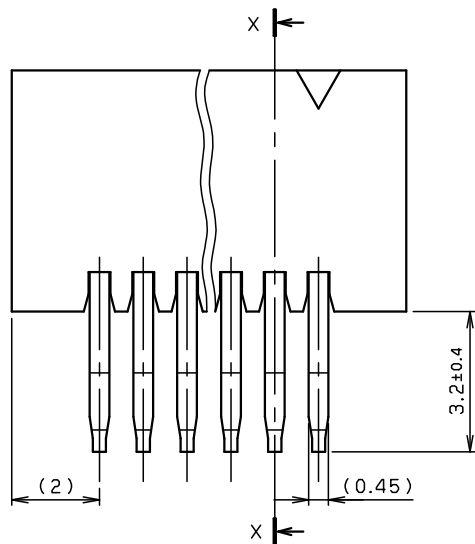


SECT. X-X (S=10/1)

注記
NOTE


① TRADE MARK : ⑧ or ⑨

極数 NO. OF POS	A	B	C
3	2.0	4.1	6.0
4	3.0	5.1	7.0
5	4.0	6.1	8.0
6	5.0	7.1	9.0
7	6.0	8.1	10.0
8	7.0	9.1	11.0
9	8.0	10.1	12.0
10	9.0	11.1	13.0
11	10.0	12.1	14.0
12	11.0	13.1	15.0
13	12.0	14.1	16.0
14	13.0	15.1	17.0
15	14.0	16.1	18.0
16	15.0	17.1	19.0
17	16.0	18.1	20.0
18	17.0	19.1	21.0
19	18.0	20.1	22.0
20	19.0	21.1	23.0
21	20.0	22.1	24.0
22	21.0	23.1	25.0
23	22.0	24.1	26.0
24	23.0	25.1	27.0
25	24.0	26.1	28.0
26	25.0	27.1	29.0
27	26.0	28.1	30.0
28	27.0	29.1	31.0
29	28.0	30.1	32.0
30	29.0	31.1	33.0

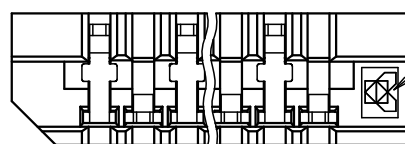

① TRADE MARK : ⑨


補強板
SUPPORTING
TAPE

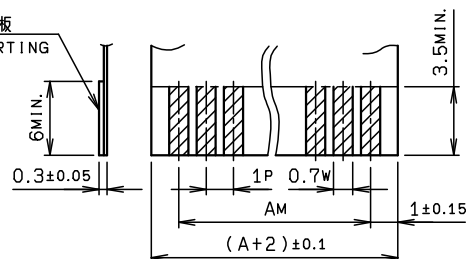

適用 FPC/FFC (Auめっき)

APPLICABLE FPC/FFC(AU PLATED)

種類 KIND	公差 TOLERANCE		
	P	W	M
FPC	±0.02	+0.1 -0.05	±0.05
FFC	±0.05	±0.03	±0.1

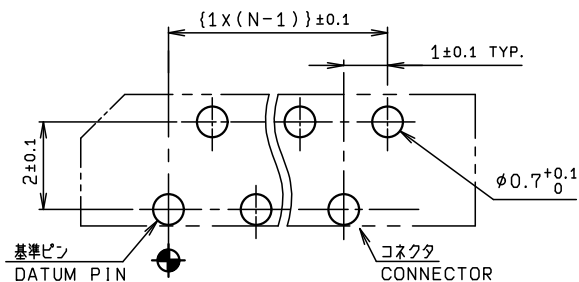

基板穴明け寸法(コネクタ搭載側)(トップビュー)
MOUNTING LAYOUT
(CONN. MOUNTING SIDE)(TOP VIEW)

(適用基板厚 t=1.2~1.6mm)
(BOARD T. H. K 1.2~1.6mm)

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格								
10 ≤ X < 10 ±0.2 30 ≤ X < 30 ±0.25 30 ≤ X ±0.3	mm	UNIT	ANGLE 3RD	O EDN-120 2-25-08						
				NO. EDN/DCN DATE		ISSUE	CHECKED	APPROVED		
				PART NAME / 品名						
ANGLE / 角度 ±3°		SCALE 8 : 1		DATE 2-25-08		SERIES 6232 FPC FFC ASSY ST DIP 1mm PITCH LIF (WITH KINK)				
DRAWN M. TAKAHASHI	DESIGNED	CHECKED	APPROVED	PART NO. / 型番 00 6232 0XX 006 894 +						
KYOCERA KYOCERA Corporation				DWG NO. / 図番 BJS 6232277					SHEET/REV 1/1 0	