

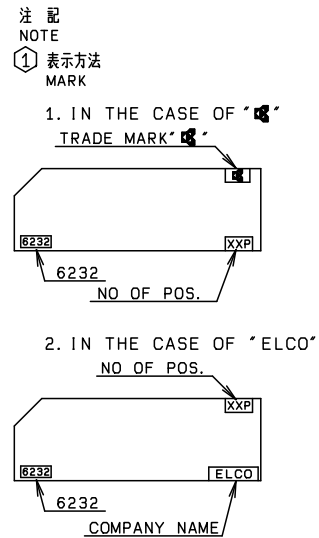
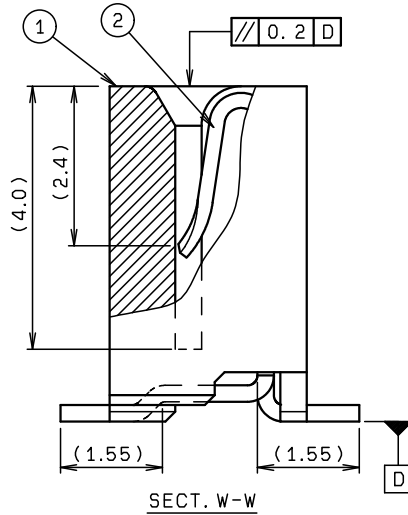
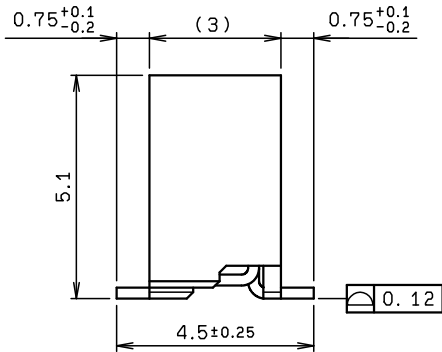
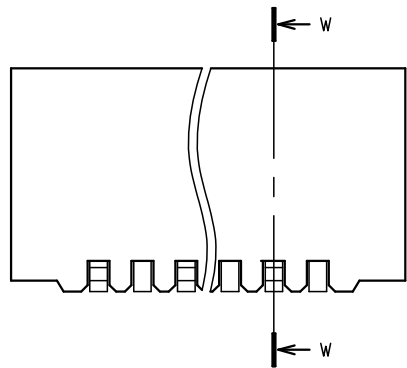


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	PPS		COLOR: BLACK UL94V-0
2	CONTACT		N	PHOS-BRONZE		t=0.25 Sn PLATING
3	VACUUM TAPE		1			

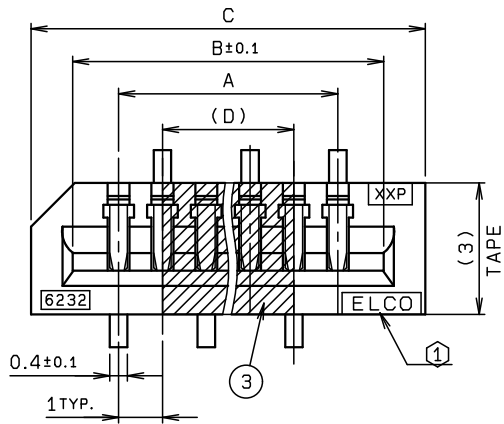


極 数 NO. OF POS.	A	B	C	D
3	2.0	4.1	6.0	5.0
4	3.0	5.1	7.0	5.0
5	4.0	6.1	8.0	5.0
6	5.0	7.1	9.0	5.0
7	6.0	8.1	10.0	5.0
8	7.0	9.1	11.0	5.0
9	8.0	10.1	12.0	5.0
10	9.0	11.1	13.0	9.0
11	10.0	12.1	14.0	9.0
12	11.0	13.1	15.0	9.0
13	12.0	14.1	16.0	9.0
14	13.0	15.1	17.0	9.0
15	14.0	16.1	18.0	9.0
16	15.0	17.1	19.0	9.0
17	16.0	18.1	20.0	9.0
18	17.0	19.1	21.0	9.0
19	18.0	20.1	22.0	9.0
20	19.0	21.1	23.0	9.0
21	20.0	22.1	24.0	9.0
22	21.0	23.1	25.0	9.0
23	22.0	24.1	26.0	9.0
24	23.0	25.1	27.0	9.0
25	24.0	26.1	28.0	9.0
26	25.0	27.1	29.0	9.0
27	26.0	28.1	30.0	9.0
28	27.0	29.1	31.0	9.0
29	28.0	30.1	32.0	9.0
30	29.0	31.1	33.0	9.0
31	30.0	32.1	34.0	9.0

※この表は1ページ目区のみ適用
※THIS CHART IS APPLICABLE TO SHEET-1 ONLY.

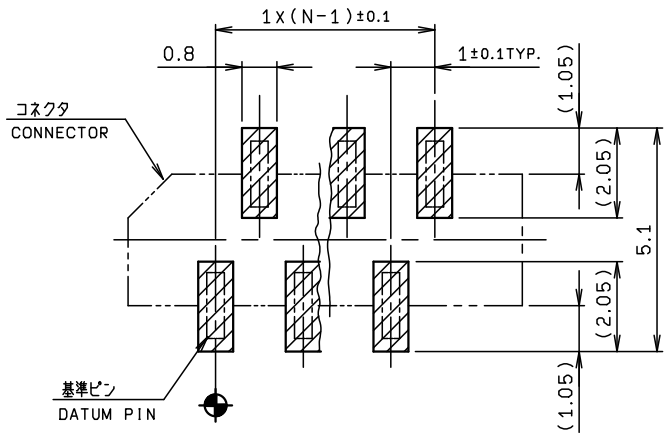

基板取付寸法 (コネクタ搭載側)
MOUNTING LAYOUT


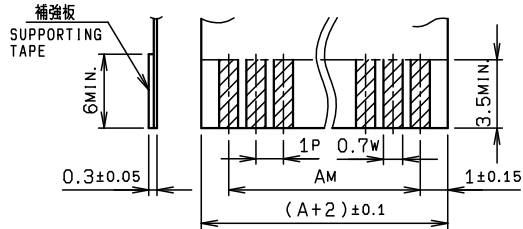


種 類 KIND	公 差 TOLERANCE		
	P	W	M
FPC	±0.02	+0.1 -0.05	±0.05
FFC	±0.05	±0.03	±0.1



適用 FPC/FFC
APPLICABLE FPC/FFC

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2		UNIT mm		ANGLE 3RD		O	EDN-139	2017/03/23	
10≦ X <30 ±0.25						NO.	EDN/DCN	DATE	ISSUE
30≦ X ±0.3						PART NAME / 品名 SERIES 6232 FPC/FFC ASSY ST SMT 1mmPITCH NONZIF SHORT TAIL TYPE WITH VACUUM TAPE			
ANGLE / 角度 ±3°		SCALE NTS		DATE 2017/03/23		PART NO. / 型番 04 6232 7XX 508 809 +			
DRAWN M. TAKAHASHI		DESIGNED		CHECKED		APPROVED			
KYOCERA Corporation				DWG NO. / 図番 BJS 6232352				SHEET/REV 1/2 0	

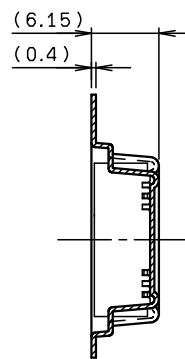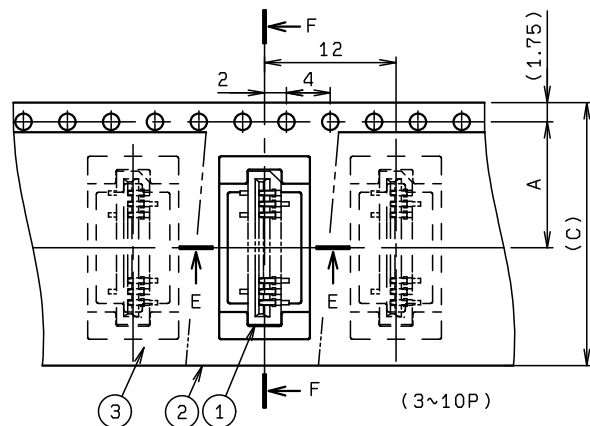


SECT. F-F
(3~10P)

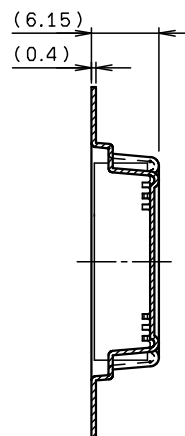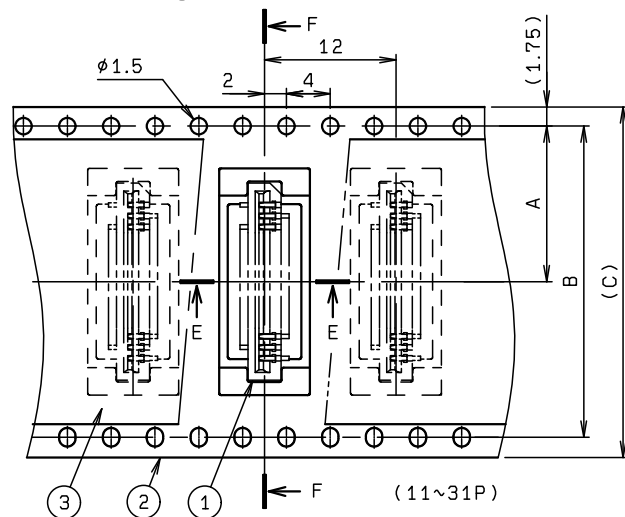


SECT. F-F
(11~31P)

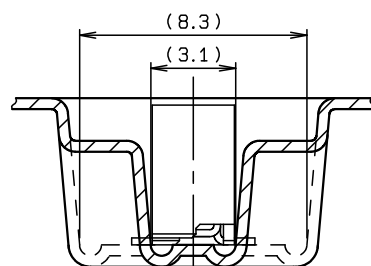

SECT. D-D
(S=5:1)

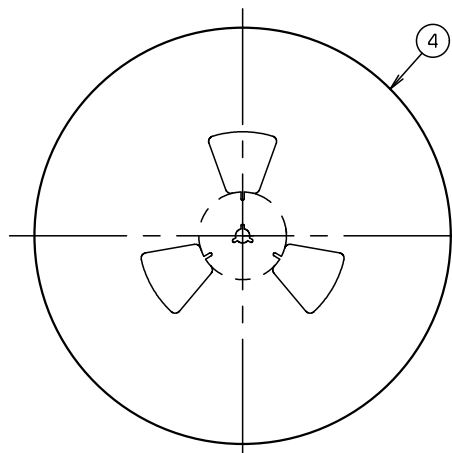

REEL DIMENSION (S=1:5)
(3~31P)

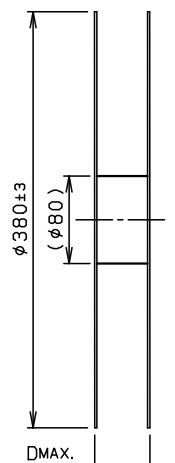


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6232 7XX 508 809 +	1200			00 6232 7XX 508 809 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

注 記
NOTE


1. 梱包数量 : 1200 個/リール
PACKING QUANTITY : 1200 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY



3. 引出し方向

USER DIRECTION OF FEED

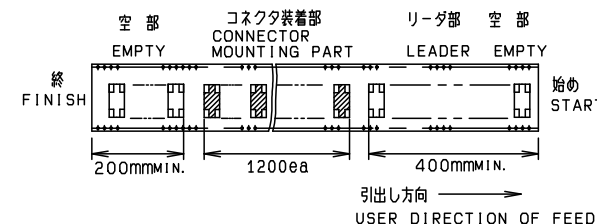

4. 型番
P/N 04 6232 7XX 508 809 +

極数
NO. OF POS.

508:SHORT TAIL
WITH VACUUM TAPE

めっき
PLATING
809 ±:Sn

※この注記の1~3は2ページ目区のみ適用

※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-2 ONLY.

極数 NO. OF POS.	A	B	C	D
3	11.5	—	24.0	30.4
4	11.5	—	24.0	30.4
5	11.5	—	24.0	30.4
6	11.5	—	24.0	30.4
7	11.5	—	24.0	30.4
8	11.5	—	24.0	30.4
9	11.5	—	24.0	30.4
10	11.5	—	24.0	30.4
11	14.2	28.4	32.0	38.4
12	14.2	28.4	32.0	38.4
13	14.2	28.4	32.0	38.4
14	14.2	28.4	32.0	38.4
15	14.2	28.4	32.0	38.4
16	14.2	28.4	32.0	38.4
17	14.2	28.4	32.0	38.4
18	14.2	28.4	32.0	38.4
19	20.2	40.4	44.0	50.4
20	20.2	40.4	44.0	50.4
21	20.2	40.4	44.0	50.4
22	20.2	40.4	44.0	50.4
23	20.2	40.4	44.0	50.4
24	20.2	40.4	44.0	50.4
25	20.2	40.4	44.0	50.4
26	26.2	52.4	56.0	62.4
27	26.2	52.4	56.0	62.4
28	26.2	52.4	56.0	62.4
29	26.2	52.4	56.0	62.4
30	26.2	52.4	56.0	62.4
31	26.2	52.4	56.0	62.4

※この表は2ページ目区のみ適用

※THIS CHART IS APPLICABLE TO
SHEET-2 ONLY.

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格					
X < 10 ±0.2		UNIT		ANGLE		REFER TO SHEET 1/2	
10 ≤ X < 30 ±0.25		mm		3RD			
30 ≤ X ±0.3		SCALE		DATE		NO. EDN/DCN	
ANGLE / 角度 ±3°		2 : 1		2017/03/23		DATE	
DRAWN		DESIGNED		CHECKED		APPROVED	
M. TAKAHASHI							
						PART NAME / 品名	
						SERIES 6232 FPC FFC ASSY ST SMT	
						TAPING 24, 32, 44, 56mm	
						(SHORT TAIL, WITH VACUUM TAPE)	
						PART NO. / 型番	
						04 6232 7XX 508 809 +	
						DWG NO. / 図番	
						BJS 6232352	
						SHEET/REV	
						2/2 0	

KYOCERA

KYOCERA Corporation

DWG NO. / 図番
BJS 6232352

SHEET/REV
2/2 0

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS