

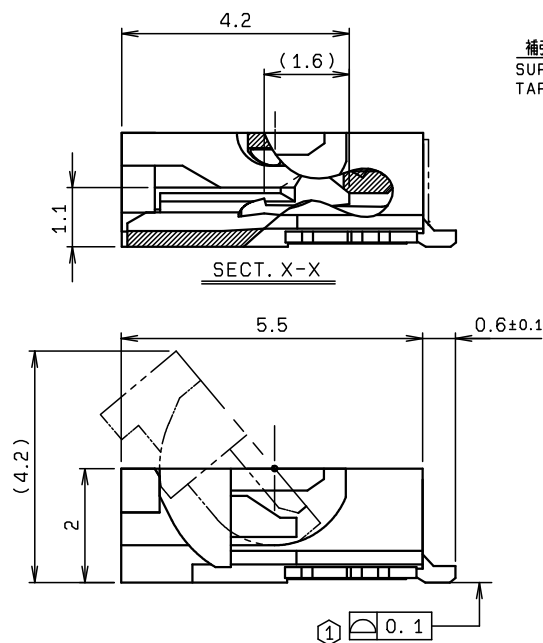


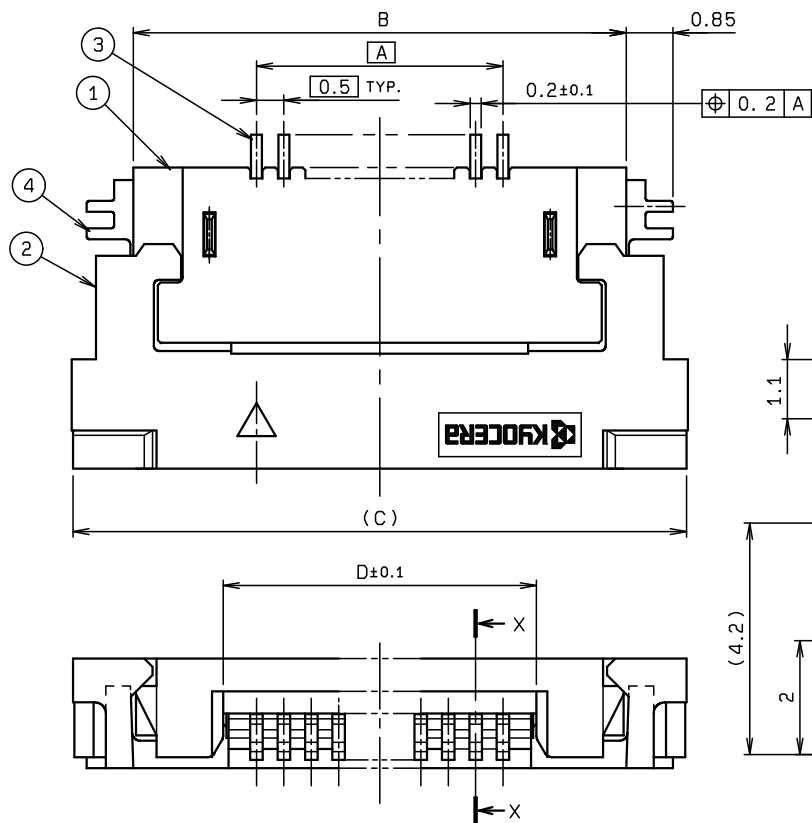

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTANCE PLASTIC		UL94V-0 COLOR: WHITE
2	ACTUATOR		1	HEAT RESISTANCE PLASTIC		UL94V-0 COLOR: BROWN
3	CONTACT		N	PHOS-BRONZE		t=0.2 Sn-Cu
4	ANCHOR PLATE		2	PHOS-BRONZE		t=0.2 Sn-Cu

極数 NO. OF POS.	A	B	C	D
5	2.0	6.5	8.7	3.1
6	2.5	7.0	9.2	3.6
7	3.0	7.5	9.7	4.1
8	3.5	8.0	10.2	4.6
9	4.0	8.5	10.7	5.1
10	4.5	9.0	11.2	5.6
11	5.0	9.5	11.7	6.1
12	5.5	10.0	12.2	6.6
13	6.0	10.5	12.7	7.1
14	6.5	11.0	13.2	7.6
15	7.0	11.5	13.7	8.1
16	7.5	12.0	14.2	8.6
17	8.0	12.5	14.7	9.1
18	8.5	13.0	15.2	9.6
19	9.0	13.5	15.7	10.1
20	9.5	14.0	16.2	10.6
21	10.0	14.5	16.7	11.1
22	10.5	15.0	17.2	11.6
23	11.0	15.5	17.7	12.1
24	11.5	16.0	18.2	12.6
25	12.0	16.5	18.7	13.1
26	12.5	17.0	19.2	13.6
27	13.0	17.5	19.7	14.1
28	13.5	18.0	20.2	14.6
29	14.0	18.5	20.7	15.1
30	14.5	19.0	21.2	15.6

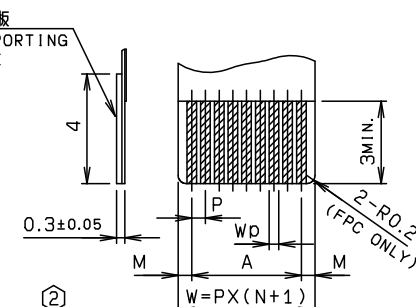

	FPC		FFC	
	1	2	1	2
M	0.5±0.12	0.5±0.1	0.5±0.1	0.5±0.08
P	0.5±0.02	0.5±0.05	0.5±0.03	0.5±0.05
A	A±0.03	A±0.05	A±0.03	A±0.05
W	W±0.07	W±0.07	W±0.07	W±0.07
WD	0.35 ^{+0.04} _{-0.03}	0.35±0.05	0.3 ^{+0.05} _{-0.02}	0.3 ^{+0.05} _{-0.02}

適用FPC, FFC寸法
APPLICABLE FPC, FFC


注 記
NOTE

① コンタクトテール及び固定金具は基板より最大浮き0.1mmとする。
CONTACT TAIL AND ANCHOR PLATE HEIGHT
SHALL BE 0.1MAX.

② 適用FPC, FFC寸法は1か2を選択のこと。
SELECT AN APPLICABLE FPC, FFC
FROM 1 OR 2.

※この注記の1～2は1ページ目内のみ適用

※THIS NOTES 1 TO 2 ARE APPLICABLE TO SHEET-1 ONLY.







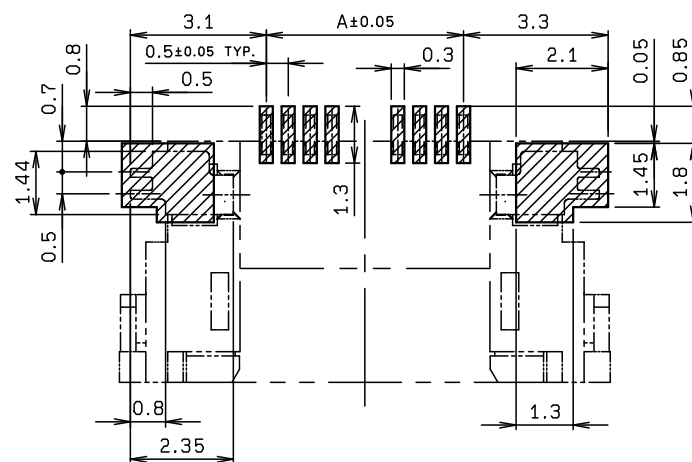


基板取付け寸法
MOUNTING LAYOUT

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		B	DCN20510	2020/05/14	Y. SANPEI		Y. FUJII
X < 10 ±0.2				A	DCN19706	2019/07/31	Y. SANPEI	N. KITAGAWA	Y. FUJII
10 ≤ X < 30 ±0.25		UNIT		O	EDN-482	2005/04/11	K. MATAGA		N. HAYASHI
30 ≤ X ±0.3		mm		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度		SCALE		PART NAME / 品名					
±3°		NTS		SERIES 6240 FPC FFC ASSY RA SMT ZIF					
DRAWN		DESIGNED		0.5mm PITCH(6210 PATTERN)					
T. KOMATSU		K. MATAGA							
CHECKED		APPROVED		PART NO. / 製番					
				04 6240 OXX 006 800 +					
				DWG NO. / 図番					
				BJS 6240100					
				SHEET/REV					
				1/2 B					


KYOCERA

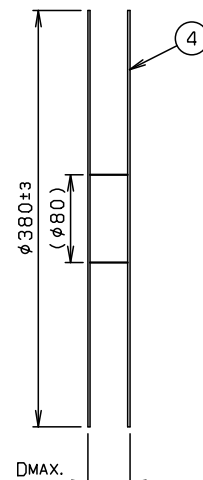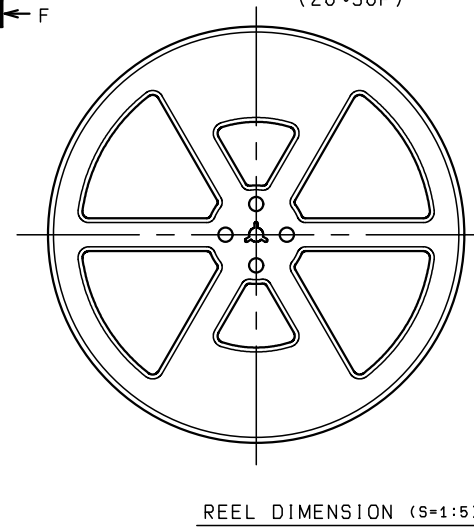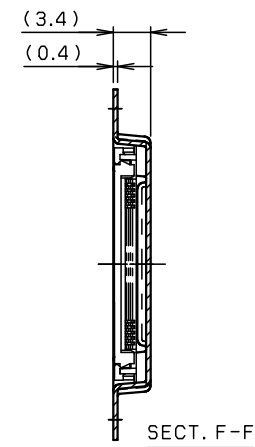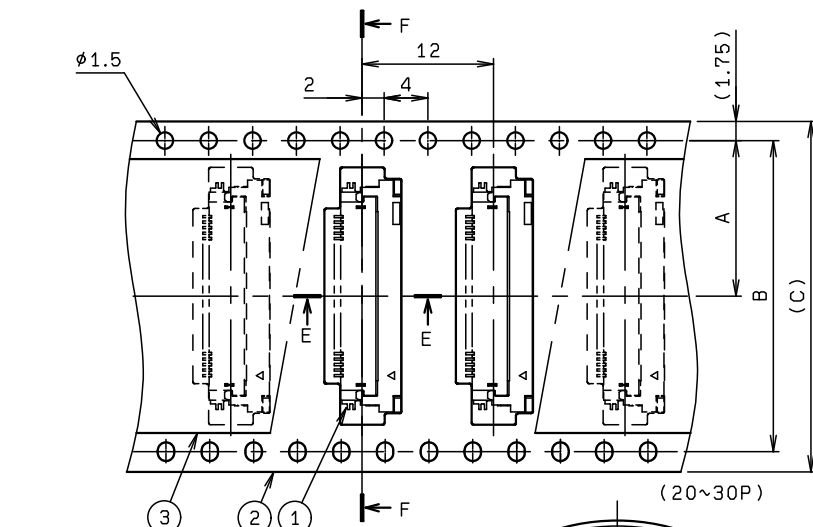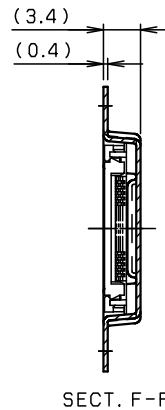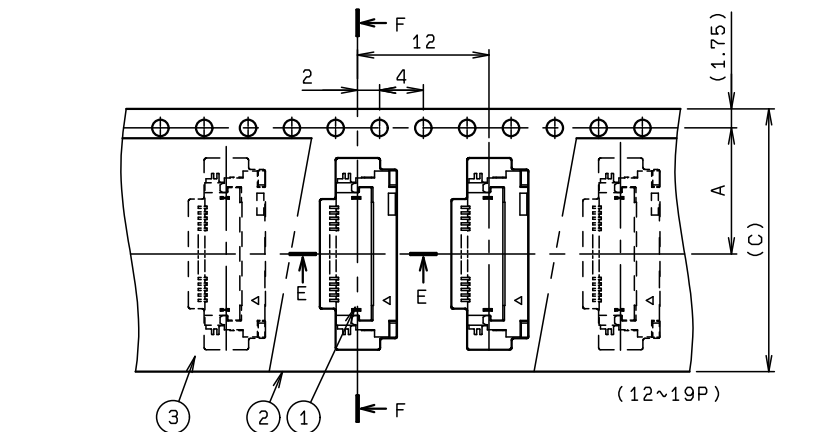


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6240 OXX 006 800 +	2000			00 6240 OXX 006 800 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

注 記
NOTE

- 梱包数量 : 2000 個/リール
PACKING QUANTITY : 2000 ea/reel
- 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY



- 引出し方向
USER DIRECTION OF FEED

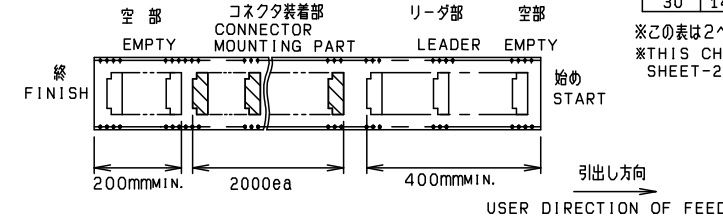

- 型番
P/N 04 6240 OXX 006 800 +
極数
NO. OF POS.

※この注記の1~3は2ページ目のみ適用
※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-2 ONLY.

極数 NO. OF POS.	A	B	C	D
5	11.5	—	24.0	30.4
6	11.5	—	24.0	30.4
7	11.5	—	24.0	30.4
8	11.5	—	24.0	30.4
9	11.5	—	24.0	30.4
10	11.5	—	24.0	30.4
11	11.5	—	24.0	30.4
12	11.5	—	24.0	30.4
13	11.5	—	24.0	30.4
14	11.5	—	24.0	30.4
15	11.5	—	24.0	30.4
16	11.5	—	24.0	30.4
17	11.5	—	24.0	30.4
18	11.5	—	24.0	30.4
19	11.5	—	24.0	30.4
20	14.2	28.4	32.0	38.4
21	14.2	28.4	32.0	38.4
22	14.2	28.4	32.0	38.4
23	14.2	28.4	32.0	38.4
24	14.2	28.4	32.0	38.4
25	14.2	28.4	32.0	38.4
26	14.2	28.4	32.0	38.4
27	14.2	28.4	32.0	38.4
28	14.2	28.4	32.0	38.4
29	14.2	28.4	32.0	38.4
30	14.2	28.4	32.0	38.4

※この表は2ページ目のみ適用
※THIS CHART IS APPLICABLE TO SHEET-2 ONLY.

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格											
X <10 ±0.2 10 ≤ X <30 ±0.25 30 ≤ X ±0.3		UNIT		ANGLE		REFER TO SHEET 1/2							
		mm		3RD		NO.		EDN/DCN	DATE	ISSUE	CHECKED	APPROVED	
						PART NAME / 品名							
ANGLE / 角度		SCALE		DATE		SERIES 6240 EMBOSS TAPE ASSY							
±3°		NTS		2005/04/11		FPC FFC ASSY RA SMT ZIF							
DRAWN	DESIGNED	CHECKED	APPROVED		PART NO. / 製番								
T. KOMATSU	K. MATAGA		N. HAYASHI		04 6240 OXX 006 800 +								
					DWG NO. / 図番					SHEET/REV			
					BJS 6240100					2/2 B			

KYOCERA

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS