
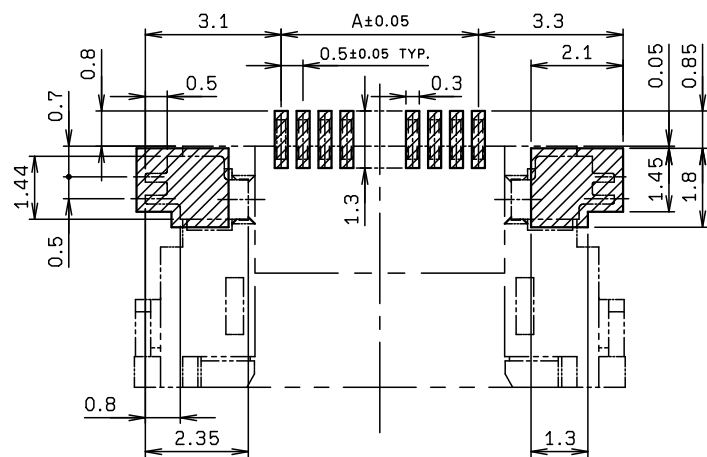
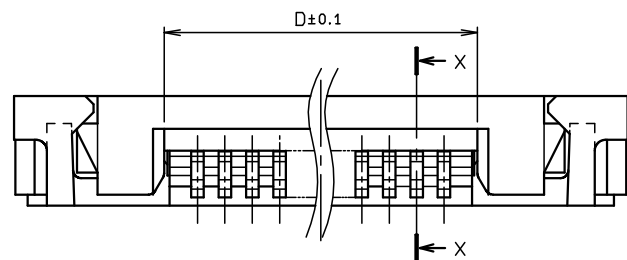
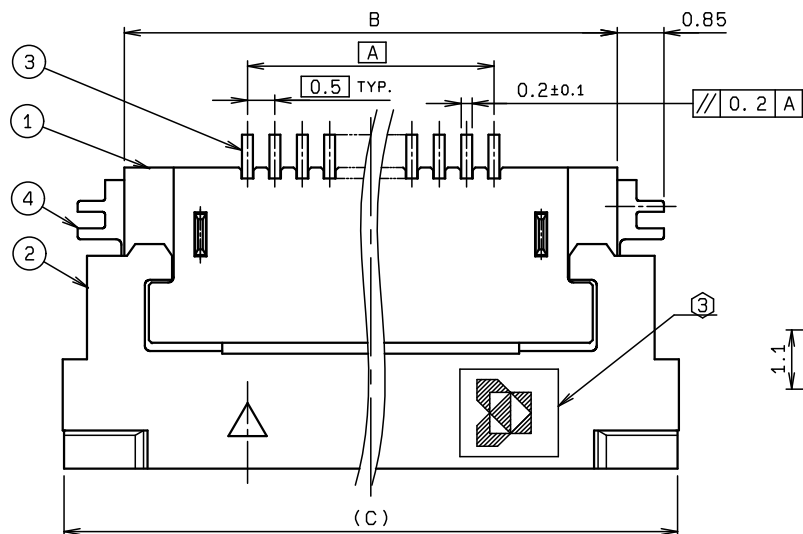
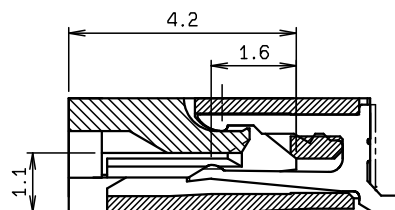


推奨基板取付寸法
MOUNTING LAYOUT

SECT. X-X

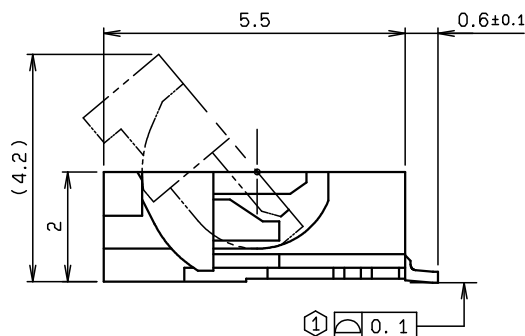


	FPC		FFC	
	1	2	1	2
M	0.5±0.12	0.5±0.1	0.5±0.1	0.5±0.08
P	0.5±0.02	0.5±0.05	0.5±0.03	0.5±0.05
A	A±0.03	A±0.05	A±0.03	A±0.05
W	W±0.07	W±0.07	W±0.07	W±0.07
WD	0.35 ^{+0.04} _{-0.03}	0.35±0.05	0.3 ^{+0.05} _{-0.02}	0.3 ^{+0.05} _{-0.02}

適用FPC/FFC寸法
(Auめっき又はC/Agタイプ)APPLICABLE FPC/FFC
(AU PLATING OR C/Ag TYPE)

極数 NO. OF POS.	A	B	C	D
5	2.0	6.5	8.7	3.1
6	2.5	7.0	9.2	3.6
7	3.0	7.5	9.7	4.1
8	3.5	8.0	10.2	4.6
9	4.0	8.5	10.7	5.1
10	4.5	9.0	11.2	5.6
11	5.0	9.5	11.7	6.1
12	5.5	10.0	12.2	6.6
13	6.0	10.5	12.7	7.1
14	6.5	11.0	13.2	7.6
15	7.0	11.5	13.7	8.1
16	7.5	12.0	14.2	8.6
17	8.0	12.5	14.7	9.1
18	8.5	13.0	15.2	9.6
19	9.0	13.5	15.7	10.1
20	9.5	14.0	16.2	10.6
21	10.0	14.5	16.7	11.1
22	10.5	15.0	17.2	11.6
23	11.0	15.5	17.7	12.1
24	11.5	16.0	18.2	12.6
25	12.0	16.5	18.7	13.1
26	12.5	17.0	19.2	13.6
27	13.0	17.5	19.7	14.1
28	13.5	18.0	20.2	14.6
29	14.0	18.5	20.7	15.1
30	14.5	19.0	21.2	15.6

※この表は1ページ目のみ適用

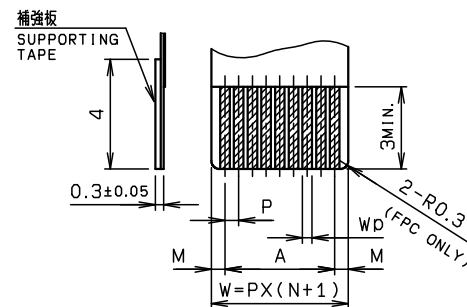※THIS CHART IS APPLICABLE TO
SHEET-1 ONLY.ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTANCE PLASTIC		UL94V-0 COLOR:WHITE
2	ACTUATOR		1	HEAT RESISTANCE PLASTIC		UL94V-0 COLOR:DARK BROWN
3	CONTACT		N	PHOS-BRONZE		t=0.2
4	ANCHOR PLATE		2	PHOS-BRONZE		t=0.2

注 記
NOTE① コンタクトテール及び固定金具は基板より最大浮き0.1とする。
CONTACT TAIL AND ANCHOR PLATE HEIGHT
SHALL BE 0.1MAX.② 適用FPC, FFC寸法は1か2を選択のこと。
SELECT AN APPLICABLE FPC, FFC
FROM 1 OR 2.

③ 社名表示 COMPANY NAME

KYOCERA



4. 適用FPC, FFCはAuめっき又はC/Agタイプとする。
APPLICABLE FPC/FFC SHALL BE
AU PLATING OR C/Ag TYPE.

※この注記の1~4は1ページ目のみ適用



※THIS NOTES 1 TO 4 ARE APPLICABLE TO
SHEET-1 ONLY.

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		B	DCN20510	2020/05/14	Y. SANPEI		Y. FUJII
				A	DCN-277	2007/03/20	A. MURATA	F. IKEGAMI	Y. FUJII
X < 10 ±0.2		UNIT		O	EDN-1056	2005/08/23	K. MURAKAMI		N. HAYASHI
10 ≤ X < 30 ±0.25		mm		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
30 ≤ X ±0.3		3RD		PART NAME / 品名					
ANGLE / 角度		SCALE		SERIES 6240 FPC FFC ASSY RA SMT ZIF					
±3°		DATE		0.5mm PITCH (6210 PATTERN) AU PLATING OR C/Ag TYPE					
DRAWN		DESIGNED		CHECKED		APPROVED		PART NO. / 製番	
LI		K. MURAKAMI				N. HAYASHI		04 6240 0XX 026 XXX +	
								DWG NO. / 図番	
								BJS 6240134	
								SHEET/REV	
								1/2 B	


KYOCERA

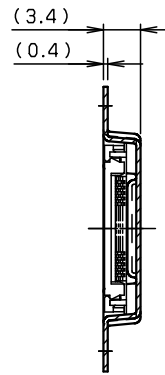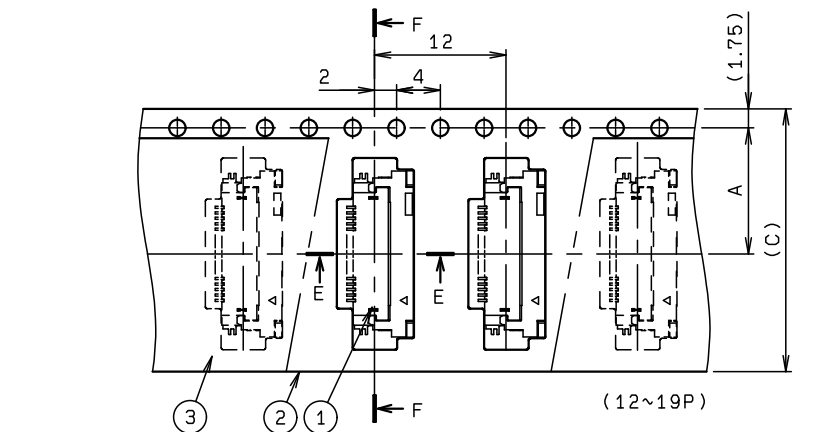


SECT. F-F

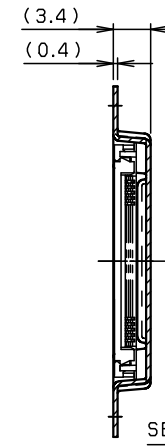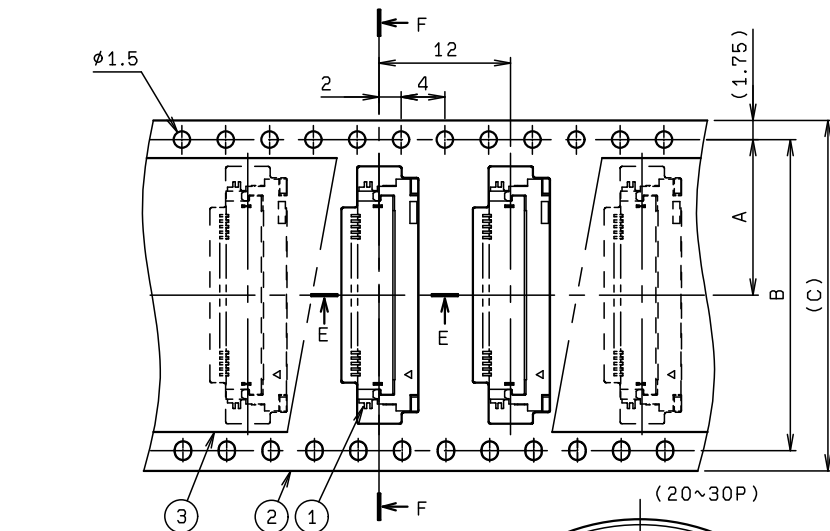


SECT. F-F



SECT. E-E (S=5:1)

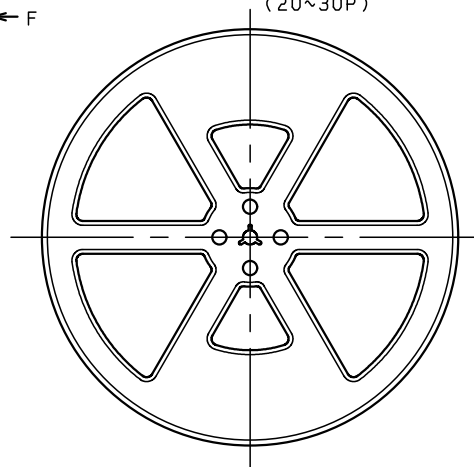

REEL DIMENSION (S=1:5)

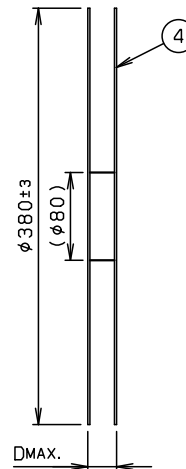


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6240 0XX 026 XXX +	2000			00 6240 0XX 026 XXX +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

種 数 NO. OF POS.	A	B	C	D
5	11.5	—	24	30.4
6	11.5	—	24	30.4
7	11.5	—	24	30.4
8	11.5	—	24	30.4
9	11.5	—	24	30.4
10	11.5	—	24	30.4
11	11.5	—	24	30.4
12	11.5	—	24	30.4
13	11.5	—	24	30.4
14	11.5	—	24	30.4
15	11.5	—	24	30.4
16	11.5	—	24	30.4
17	11.5	—	24	30.4
18	11.5	—	24	30.4
19	11.5	—	24	30.4
20	14.2	28.4	32	38.4
21	14.2	28.4	32	38.4
22	14.2	28.4	32	38.4
23	14.2	28.4	32	38.4
24	14.2	28.4	32	38.4
25	14.2	28.4	32	38.4
26	14.2	28.4	32	38.4
27	14.2	28.4	32	38.4
28	14.2	28.4	32	38.4
29	14.2	28.4	32	38.4
30	14.2	28.4	32	38.4


※この表は2ページ目にてのみ適用

※THIS CHART IS APPLICABLE TO SHEET-2 ONLY.

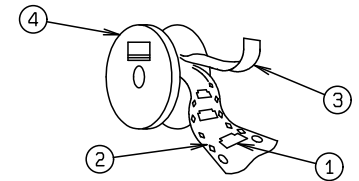注 記
NOTE1. 梱包数量 : 2000 個/リール
PACKING QUANTITY : 2000 ea/reel2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

3. 引出し方向

USER DIRECTION OF FEED

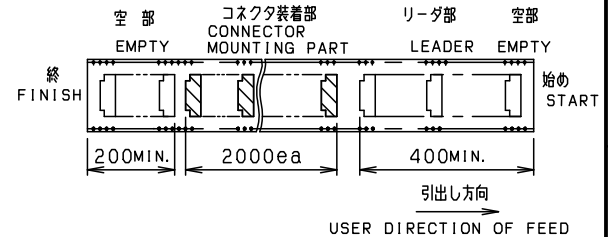4. 型 番
P/N

04 6240 0XX 026 XXX +

種 数
NO. OF POS.めっきコード
PLATING CODE868+: Au FLASH WITH NI DAM
(ANCHOR PLATE Sn-Cu)846+: Au(SELECTIVE)
(ANCHOR PLATE Sn-Cu)

※この注記の1~3は2ページ目にてのみ適用

※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-2 ONLY.

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X <10 10 ≤ X <30 30 ≤ X	±0.2 ±0.25 ±0.3	UNIT		ANGLE		REFER TO		SHEET 1/2	
		mm		3RD		NO.		EDN/DCN	
		SCALE		DATE		DATE		ISSUE	
ANGLE / 角度		2 : 1		2005/08/23		PART NAME / 品名			
						SERIES 6240 EMBOSS TAPE ASSY			
						FPC ASSY RA SMT ZIF			
DRAWN	DESIGNED	CHECKED	APPROVED		PART NO. / 型番				
LI	K. MURAKAMI		N. HAYASHI		04 6240 0XX 026 XXX +				
					DWG NO. / 図番			SHEET/REV	
					BJS 6240134			2/2 B	

KYOCERA

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS