


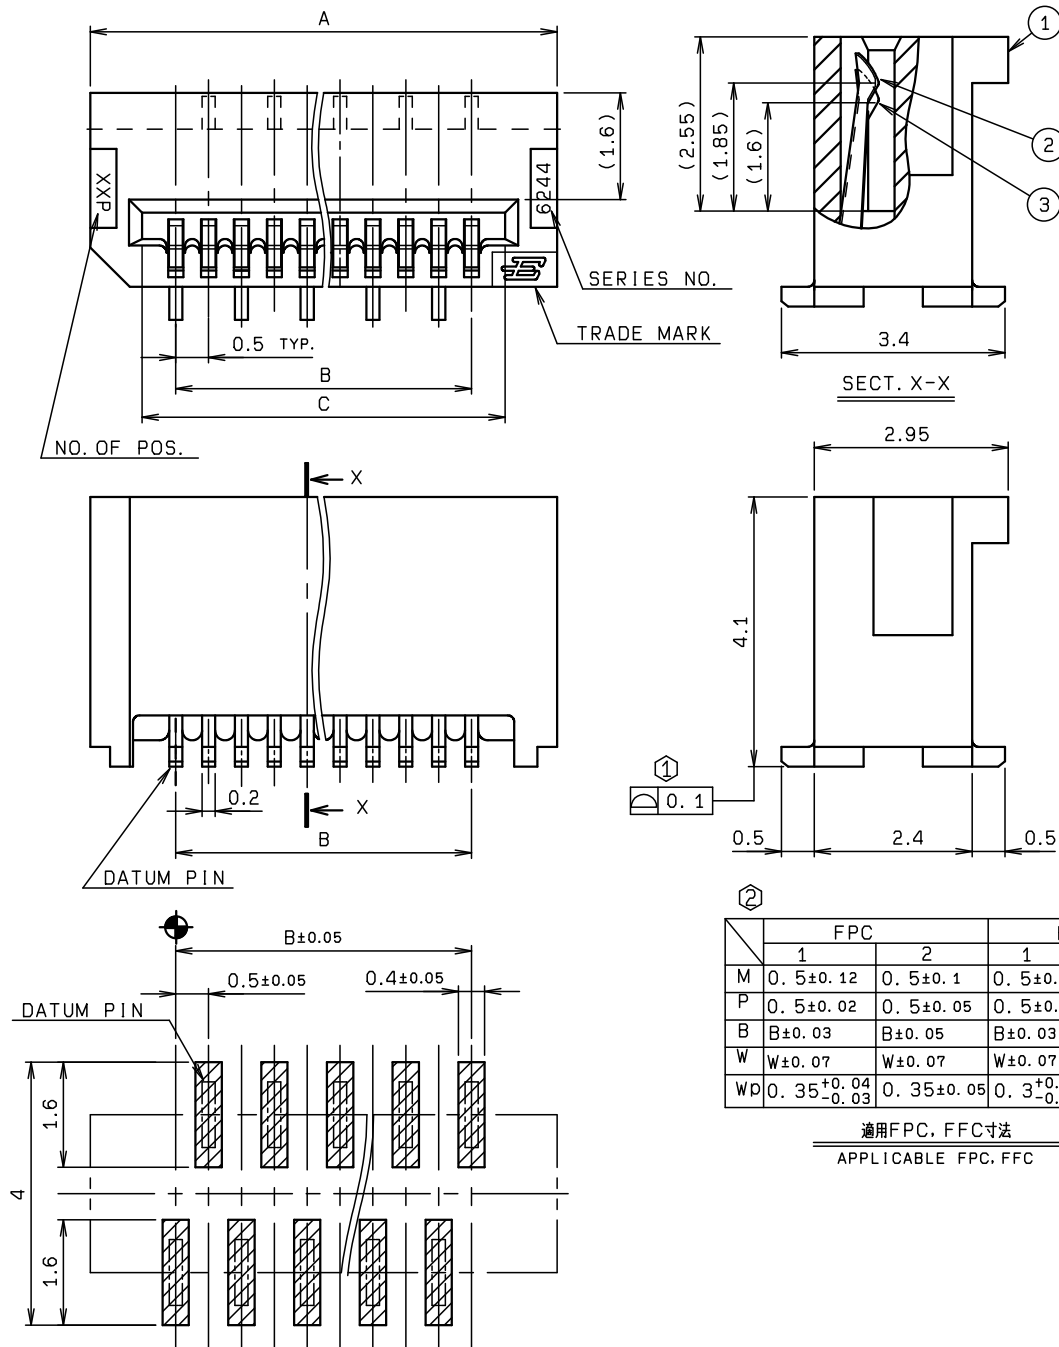

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTANT PLASTIC		UL94V-0 COLOR:NATURAL
2	CONTACT A		N	PHOS-BRONZE		t=0.2 Sn-Cu
3	CONTACT B			PHOS-BRONZE		t=0.2 Sn-Cu

極数 NO. OF POS.	A	B	C
6	5.1	2.5	3.6
7	5.6	3.0	4.1
8	6.1	3.5	4.6
9	6.6	4.0	5.1
10	7.1	4.5	5.6
11	7.6	5.0	6.1
12	8.1	5.5	6.6
13	8.6	6.0	7.1
14	9.1	6.5	7.6
15	9.6	7.0	8.1
16	10.1	7.5	8.6
17	10.6	8.0	9.1
18	11.1	8.5	9.6
19	11.6	9.0	10.1
20	12.1	9.5	10.6
21	12.6	10.0	11.1
22	13.1	10.5	11.6
23	13.6	11.0	12.1
24	14.1	11.5	12.6
25	14.6	12.0	13.1
26	15.1	12.5	13.6
27	15.6	13.0	14.1
28	16.1	13.5	14.6
29	16.6	14.0	15.1
30	17.1	14.5	15.6

※この表は1ページ目のみ適用

※THIS CHART IS APPLICABLE TO SHEET-1 ONLY.


注記
NOTE① コンタクトテールの最大浮き0.1とする。
CONTACT TAIL
HEIGHT SHALL BE 0.1MAX.② 適用FPC, FFC寸法は1か2を選択のこと。
SELECT AN APPLICABLE FPC, FFC
FROM 1 OR 2.

※この注記は1ページ目のみ適用

※THIS NOTES ARE APPLICABLE TO SHEET-1 ONLY.

補強板


SUPPORTING TAPE

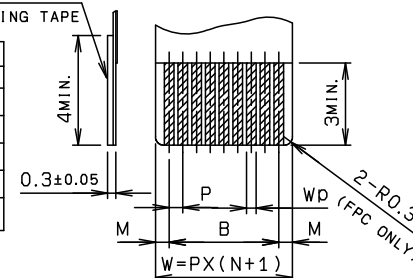ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X <10 10≤ X <30 30≤ X	±0.2 ±0.25 ±0.3			A	DCN20759	2020/08/05	Y. SANPEI	Y. MANBA	Y. FUJII
		UNIT		O	EDN-714	2020/06/27	K. MURAKAMI	A. HAGIWARA	T. SATOH
		mm	ANGLE 3RD	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE NTS	DATE 2006/06/27	PART NAME / 品名 SERIES 6244 FPC FFC ASSY ST SMT 0.5mm PITCH LIF TYPE					
DRAWN T. KOMATSU	DESIGNED K. MURAKAMI	CHECKED A. HAGIWARA	APPROVED T. SATOH	PART NO. / 型番 04 6244 4XX 001 800 +					
				DWG NO. / 図番 BJS 6244068				SHEET/REV 1/2 A	

KYOCERA


推奨基板取付寸法(コネクタ搭載側)
MOUNTING LAYOUT (CONN. MOUNTING SIDE)

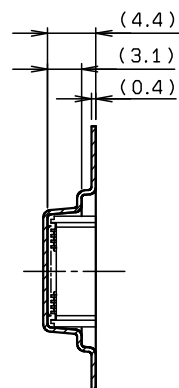

SECT. E-E

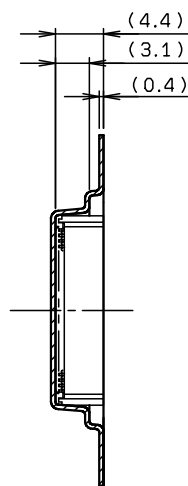


SECT. E-E

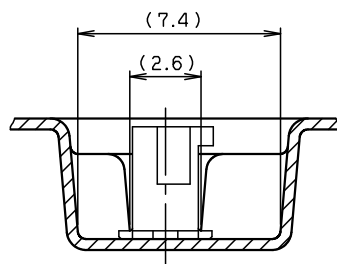


SECT. F-F


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

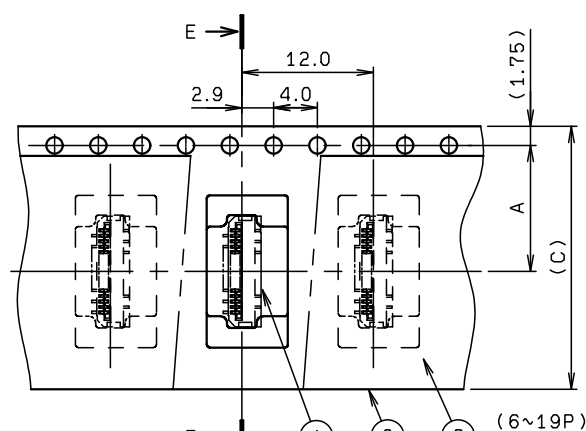

(6~19P)

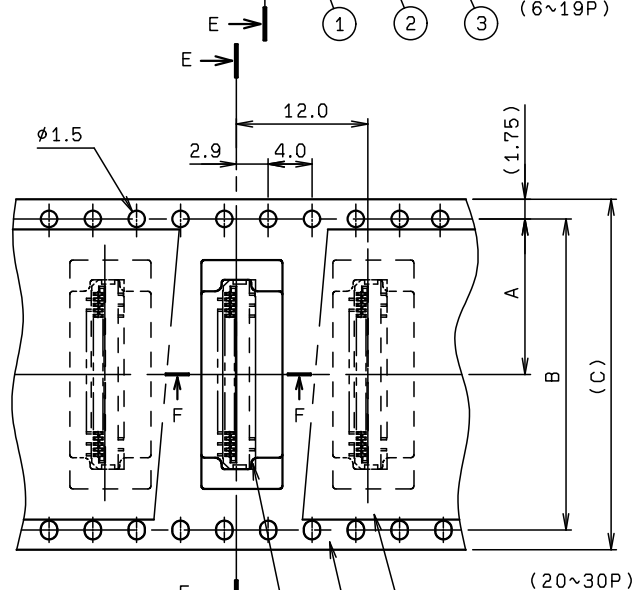

(20~30P)

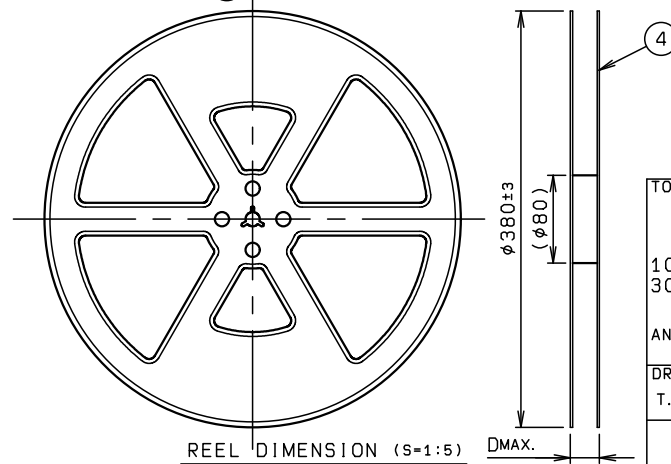


REEL DIMENSION (S=1:5)

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6244 4XX 001 800 +	1500			00 6244 4XX 001 800 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

極数 NO. OF POS.	A	B	C	D
6	11.5	—	24.0	30.4
7	11.5	—	24.0	30.4
8	11.5	—	24.0	30.4
9	11.5	—	24.0	30.4
10	11.5	—	24.0	30.4
11	11.5	—	24.0	30.4
12	11.5	—	24.0	30.4
13	11.5	—	24.0	30.4
14	11.5	—	24.0	30.4
15	11.5	—	24.0	30.4
16	11.5	—	24.0	30.4
17	11.5	—	24.0	30.4
18	11.5	—	24.0	30.4
19	11.5	—	24.0	30.4
20	14.2	28.4	32.0	38.4
21	14.2	28.4	32.0	38.4
22	14.2	28.4	32.0	38.4
23	14.2	28.4	32.0	38.4
24	14.2	28.4	32.0	38.4
25	14.2	28.4	32.0	38.4
26	14.2	28.4	32.0	38.4
27	14.2	28.4	32.0	38.4
28	14.2	28.4	32.0	38.4
29	14.2	28.4	32.0	38.4
30	14.2	28.4	32.0	38.4


※この表は2ページ目にのみ適用

※THIS CHART IS APPLICABLE TO SHEET-2 ONLY.

注記
NOTE1. 梱包数量 : 1500個/リール
PACKING QUANTITY : 1500 ea/reel2. 納入時のリール巻方向
REELING DIRECTION
IN DELIVERY

3. 引出し方向

USER DIRECTION OF FEED

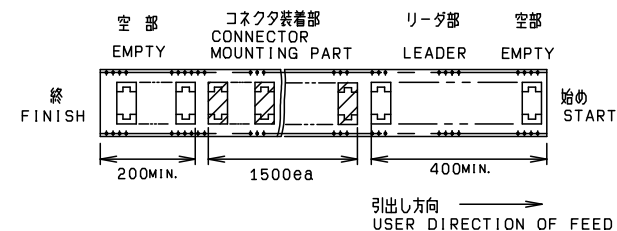4. 型番
P/N

04 6244 4XX 001 800 +

4: 耐熱仕様
RESISTANT TO HEAT極数
NO. OF POS.0: 片側C面タイプ
ONE SIDE CHAMFER TYPE1: 逆千鳥タイプ
REVERSE TYPE

※この注記の1~4は2ページ目にのみ適用

※THIS NOTES 1 TO 4 ARE APPLICABLE TO SHEET-2 ONLY.

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格								
10 ≤ X < 30	X < 10	±0.2	UNIT mm	ANGLE 3RD	REFER TO SHEET 1/2					
	X < 30	±0.25			NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
	30 ≤ X	±0.3								
ANGLE / 角度		±3°	SCALE NTS		DATE 2006/06/27		PART NAME / 品名 SERIES 6244 EMBOSS TAPE ASSY FPC FFC ASSY ST SMT 0.5mmPITCH			
DRAWN T. KOMATSU		DESIGNED K. MURAKAMI		CHECKED A. HAGIWARA		APPROVED T. SATOH		PART NO. / 型番 04 6244 4XX 001 800 +		
				DWG NO. / 図番 BJS 6244068				SHEET/REV 2/2 A		

KYOCERA