
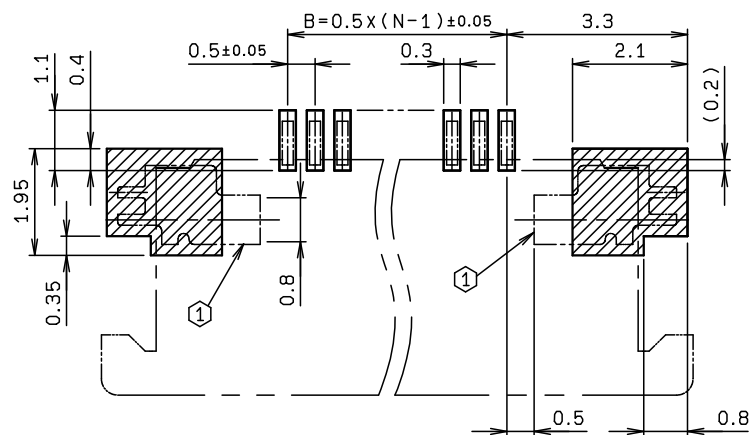
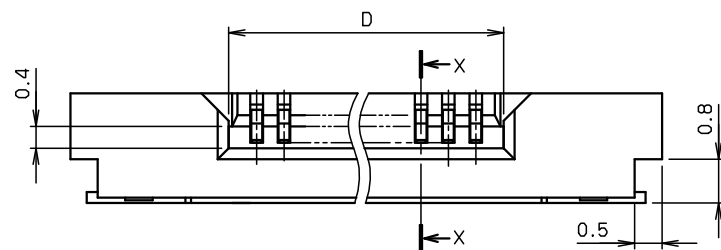
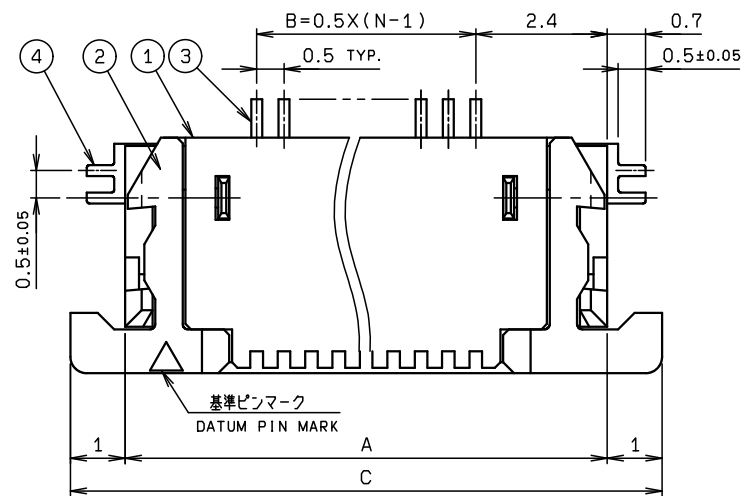
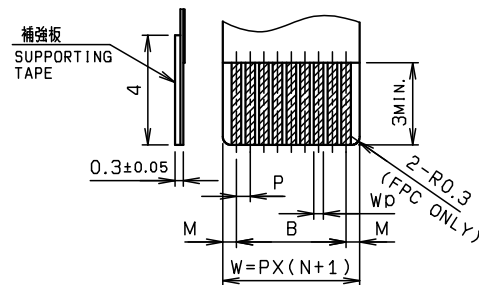
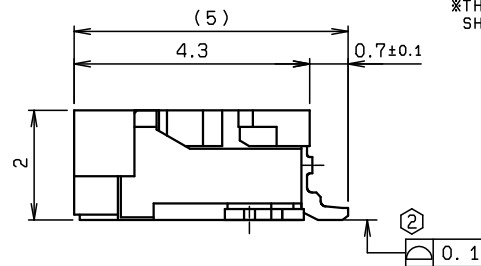


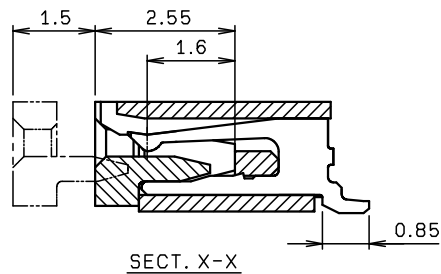

推奨基板取付寸法（コネクタ搭載側）

MOUNTING LAYOUT
(CONN. MOUNTING SIDE)

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	PPS		COLOR:BLACK UL94V-0
2	SLIDER		1	PPS		COLOR:BLACK UL94V-0
3	CONTACT		N	PHOS-BRONZE		t=0.2
4	ANCHOR PLATE		2	PHOS-BRONZE		t=0.2

極数 NO. OF POS.	A	B	C	D
31	19.8	15.0	21.8	16.1
32	20.3	15.5	22.3	16.6
33	20.8	16.0	22.8	17.1
34	21.3	16.5	23.3	17.6
35	21.8	17.0	23.8	18.1
36	22.3	17.5	24.3	18.6
37	22.8	18.0	24.8	19.1
38	23.3	18.5	25.3	19.6
39	23.8	19.0	25.8	20.1
40	24.3	19.5	26.3	20.6

※この表は1ページ目にお適用

※THIS CHART IS APPLICABLE TO
SHEET-1 ONLY.注 記
NOTE

- ① この部分は金具位置の為に空けておくこと
OPEN THIS SPACE FOR ANCHOR PLATE.
- ② コンタクトテール及び固定金具は基板より最大浮き0.1とする。
CONTACT TAIL AND MOUNT METAL
HEIGHT SHALL BE 0.1MAX.
- ③ 適用FPC、FFC寸法は1か2を選択のこと。
SELECT AN APPLICABLE FPC/FFC
FROM 1 OR 2.
4. FPC、FFC仕様
FPC、FFC SPEC.
接点部 AUめっき 0.1μmMIN.
CONTACT AREA AU PLATING 0.1μmMIN.


※この注記は1ページ目にお適用

※THIS NOTES IS APPLICABLE TO
SHEET-1 ONLY.


	FPC		FFC	
	1	2	1	2
M	0.5±0.12	0.5±0.1	0.5±0.1	0.5±0.08
P	0.5±0.02	0.5±0.05	0.5±0.03	0.5±0.05
B	B±0.03	B±0.05	B±0.03	B±0.05
W	W±0.07	W±0.07	W±0.07	W±0.07
Wp	0.35 ^{+0.04} _{-0.03}	0.35±0.05	0.3 ^{+0.05} _{-0.02}	0.3 ^{+0.05} _{-0.02}

適用FPC/FFC寸法
(AUめっき)APPLICABLE FPC/FFC
(AU PLATING)ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格								
X <10 ±0.2 10≤ X <30 ±0.25 30≤ X ±0.3	mm	ANGLE 3RD	SCALE 10 : 1	DATE 2020/10/06	O EDN20274 2020/10/06 Y. SAMPEI Y. MANBA Y. FUJII					
					NO. EDN/DCN DATE ISSUE CHECKED APPROVED					
					PART NAME / 品名 SERIES 6262 FPC FFC ASSY UPPER CONTACT LARGE TAB, 2 LEG ANCHOR PLATE AU PLATING					
ANGLE / 角度 ±3°					PART NO. / 型番 08 6262 0XX 340 XXX +					
DRAWN M. TAKAHASHI	DESIGNED Y. SAMPEI	CHECKED Y. MANBA	APPROVED Y. FUJII	DWG NO. / 図番 BJS 6262075						SHEET/REV 1/2 0
KYOCERA										

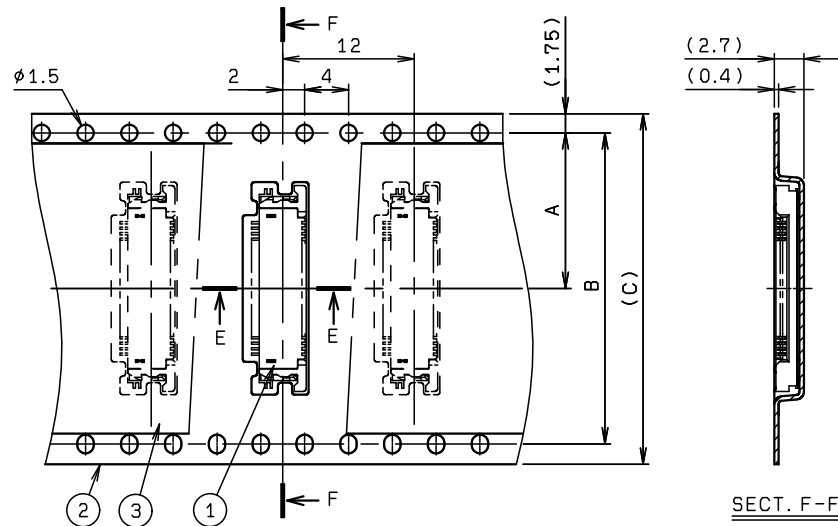


SECT. F-F

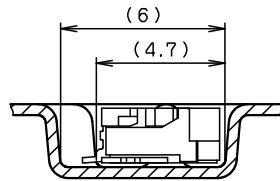

SECT. E-E (S=5:1)

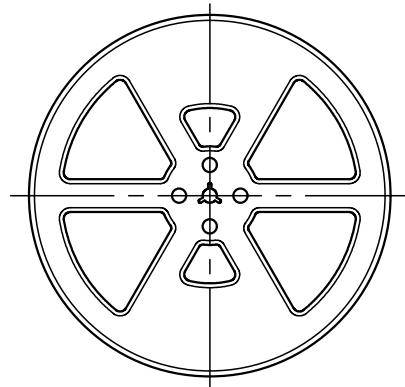


REEL DIMENSION (S=1:5)

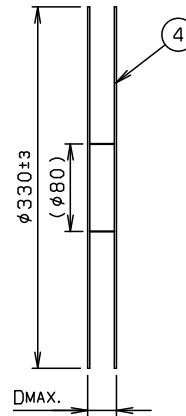


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	00 6262 0XX 340 XXX +	2000			
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

注 記
NOTE

1. 梱包数量 : 2000個/リール
PACKING QUANTITY : 2000ea/REEL
2. 納入時のリール巻方向
DIRECTION OF REELING IN DELIVERY



3. 引出し方向
USER DIRECTION OF FEED

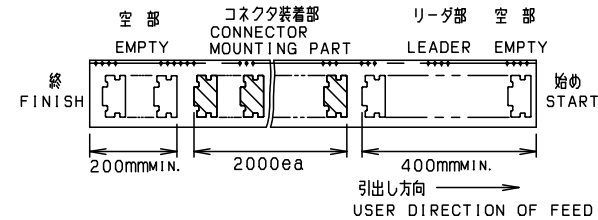

4. 型番 08 6262 0XX 340 XXX +
P/N

極数
NO. OF POS.

バリエーション
VARIATION

340 : 金具小タイプ
SMALL METAL TYPE

めっきコード
PLATING CODE

829+: Au PLATING (WITH Ni DAM)
(ANCHOR PLATE Sn-Cu)

846+: Au PLATING (SELECTIVE)
(ANCHOR PLATE Sn-Cu)

※この注記の1~3は2ページ目にも適用
※NOTE 1 TO 3 ARE APPLICABLE TO PAGE-2 ONLY.

極数 NO. OF POS.	A	B	C	D
31	20.2	40.5	44.0	50.4
32	20.2	40.5	44.0	50.4
33	20.2	40.5	44.0	50.4
34	20.2	40.5	44.0	50.4
35	20.2	40.5	44.0	50.4
36	20.2	40.5	44.0	50.4
37	20.2	40.5	44.0	50.4
38	20.2	40.5	44.0	50.4
39	20.2	40.5	44.0	50.4
40	20.2	40.5	44.0	50.4

※この表は2ページ目にも適用
※THIS CHART IS APPLICABLE TO
SHEET-2 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格								
X <10 10 ≤ X <30 30 ≤ X	±0.2 ±0.25 ±0.3									
		UNIT	ANGLE							
		mm	3RD	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED	
ANGLE / 角度				PART NAME / 品名						
±3°				SERIES 6262 EMBOSS TAPE ASSY						
2 : 1				FPC ASSY AU PLATING WITH ANCHOR PLATE, TAB						
2020/10/06										
DRAWN	DESIGNED	CHECKED	APPROVED	PART NO. / 型番						
				08 6262 0XX 340 XXX +						
				DWG NO. / 図番					SHEET/REV	
				BJS 6262075					2/2 0	

KYOCERA

SHEET/REV

2/2 0