

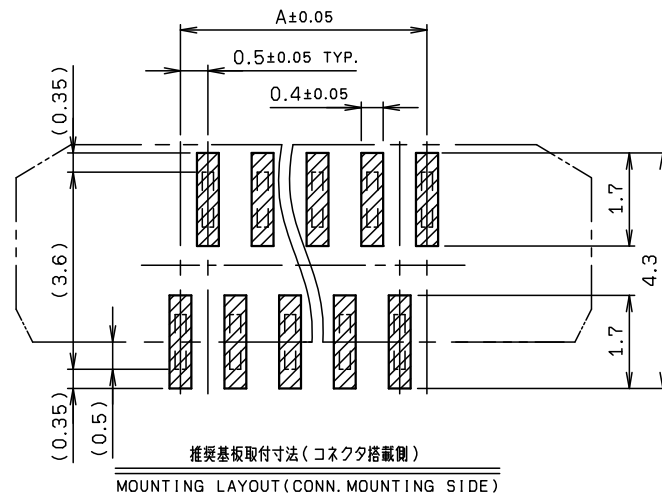
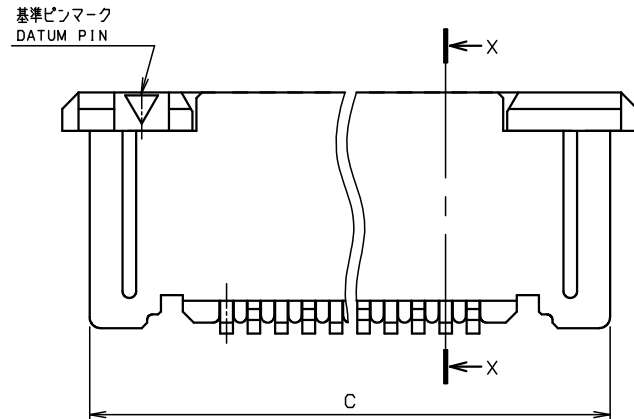


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTING PLASTIC		COLOR : BROWN
2	ACTUATOR		1	HEAT RESISTING PLASTIC		COLOR : BLACK
3	CONTACT		N	PHOS-BRONZE		t=0.2 AU FLASH

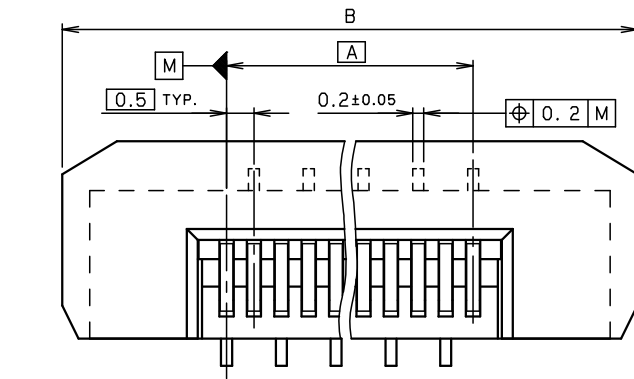


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

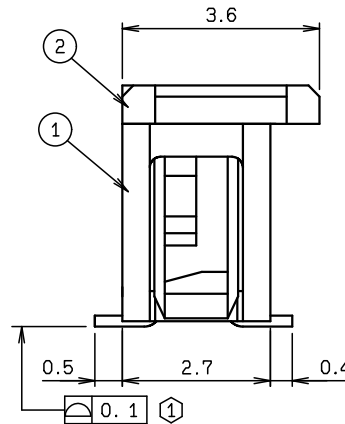


	FPC		FFC	
	1	2	1	2
M	0.5±0.12	0.5±0.1	0.5±0.1	0.5±0.08
P	0.5±0.02	0.5±0.05	0.5±0.03	0.5±0.05
A	A±0.03	A±0.05	A±0.03	A±0.05
W	W±0.07	W±0.07	W±0.07	W±0.07
WD	0.35 ^{+0.04} _{-0.03}	0.35±0.05	0.3 ^{+0.05} _{-0.02}	0.3 ^{+0.05} _{-0.02}

適用FPC, FFC寸法
APPLICABLE FPC, FFC

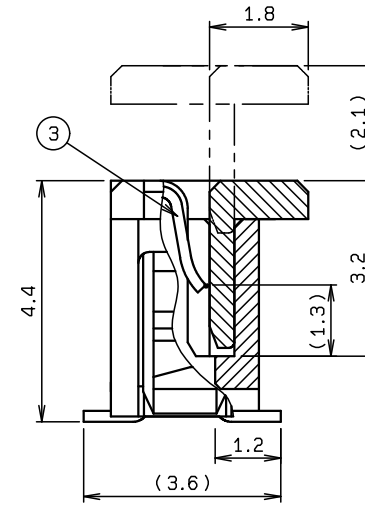

SECT. X-X

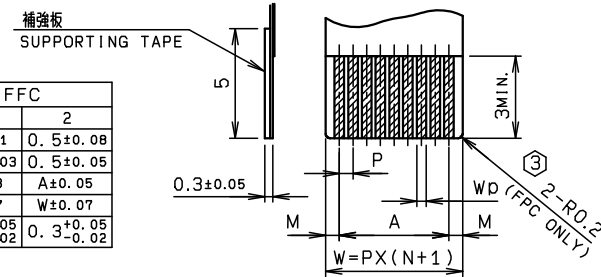




極数 NO. OF POS.	A	B	C
31	15.0	21.0	20.0
32	15.5	21.5	20.5
33	16.0	22.0	21.0
34	16.5	22.5	21.5
35	17.0	23.0	22.0
36	17.5	23.5	22.5
37	18.0	24.0	23.0
38	18.5	24.5	23.5
39	19.0	25.0	24.0
40	19.5	25.5	24.5
41	20.0	26.0	25.0
42	20.5	26.5	25.5
43	21.0	27.0	26.0
44	21.5	27.5	26.5
45	22.0	28.0	27.0
46	22.5	28.5	27.5
47	23.0	29.0	28.0
48	23.5	29.5	28.5
49	24.0	30.0	29.0
50	24.5	30.5	29.5

注 記
NOTE

- ① コンタクトテールの最大浮き0.1mmとする。
CONTACT TAIL
HEIGHT SHALL BE 0.1mm MAX.
- ② 適用FPC, FFC寸法は1か2を選択のこと。
SELECT AN APPLICABLE FPC, FFC
FROM 1 OR 2.
- ③ Rは, FPCの導体部に掛からないこと。
R SHOULD NOT OVERLAP CONDUCTOR.

TOLERANCE / 一般公差(S) X <10 ±0.2 10≤ X <30 ±0.25 30≤ X ±0.3 ANGLE / 角度 ±3°		PRODUCT SPEC / 製品規格 UNIT mm		ANGLE 3RD		B	DCN20571	2020/08/05	Y. MANBA		Y. FUJII
						A	DCN-463	2011/06/22	T. MAKABE	A. TSUNEMURA	T. SATOH
		SCALE 10 : 1		DATE 2004/12/17		O	EDN-1372	2004/12/17	K. MURAKAMI	A. HAGIWARA	N. HAYASHI
						NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
						PART NAME / 品名 SERIES 6274 FPC/FFC ASSY ST SMT 0.5mm PITCH ZIF CONNECTOR					
DRAWN LI		DESIGNED K. MURAKAMI		CHECKED A. HAGIWARA		APPROVED N. HAYASHI		PART NO. / 型番 04 6274 0XX 000 894 +			
						DWG NO. / 図番 BJS 6274027				SHEET/REV 1/2 B	

KYOCERA

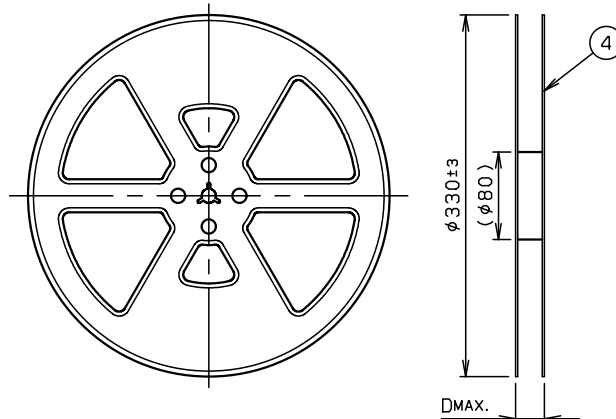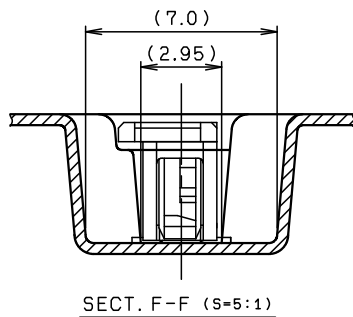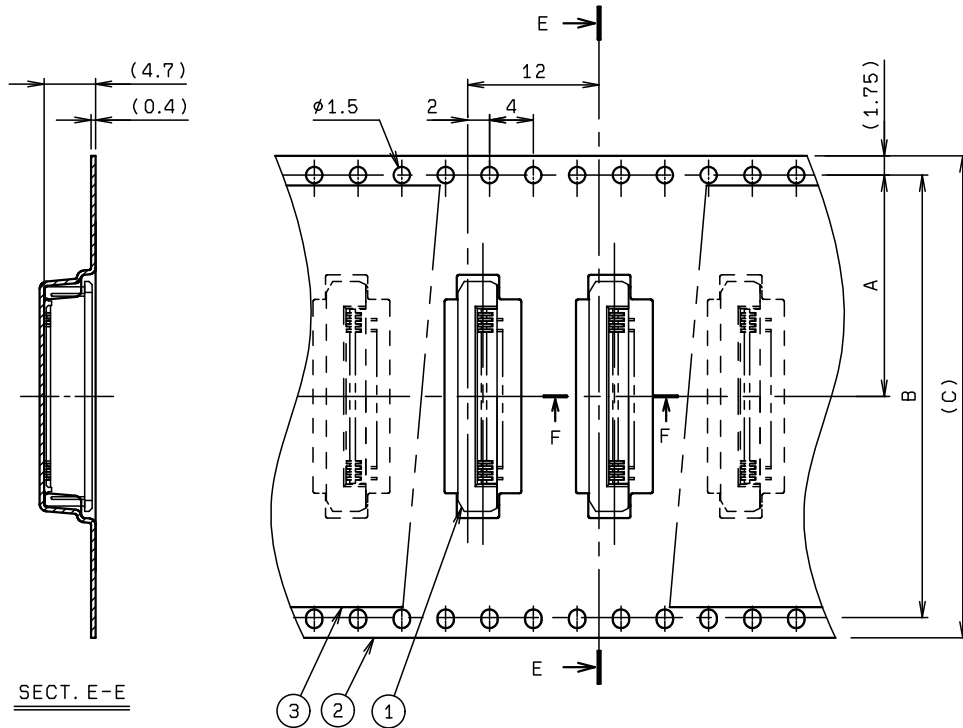


REEL DIMENSION (S=1:5)

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6274 0XX 000 894 +	1000			00 6274 0XX 000 894 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

注 記
NOTE

- 梱包数量 : 1000 個/リール
PACKING QUANTITY : 1000 ea/reel
- 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY



- 引出し方向
USER DIRECTION OF FEED

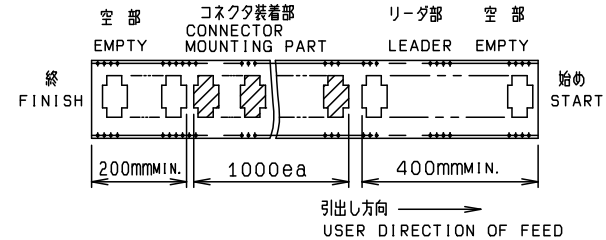

- 型番
P/N 04 6274 0XX 000 894 +
極数
NO. OF POS.

※この注記の1~3は2ページ目のみ適用
※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-2 ONLY.

極数 NO. OF POS.	A	B	C	D
31	20.2	40.4	44.0	50.4
32	20.2	40.4	44.0	50.4
33	20.2	40.4	44.0	50.4
34	20.2	40.4	44.0	50.4
35	20.2	40.4	44.0	50.4
36	20.2	40.4	44.0	50.4
37	20.2	40.4	44.0	50.4
38	20.2	40.4	44.0	50.4
39	20.2	40.4	44.0	50.4
40	20.2	40.4	44.0	50.4
41	20.2	40.4	44.0	50.4
42	20.2	40.4	44.0	50.4
43	20.2	40.4	44.0	50.4
44	20.2	40.4	44.0	50.4
45	20.2	40.4	44.0	50.4
46	20.2	40.4	44.0	50.4
47	20.2	40.4	44.0	50.4
48	20.2	40.4	44.0	50.4
49	20.2	40.4	44.0	50.4
50	20.2	40.4	44.0	50.4

※この表は2ページ目にも適用
※THIS CHART IS APPLICABLE TO
SHEET-2 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2									
10≤ X <30 ±0.25									
30≤ X ±0.3									
ANGLE / 角度		UNIT		ANGLE		REFER TO SHEET		1/2	
±3°		mm		3RD					
		SCALE		DATE		NO.		EDN/DCN	
		2 : 1		2004/12/17		DATE		ISSUE	
						CHECKED		APPROVED	
DRAWN		DESIGNED		CHECKED		PART NAME / 品名		SERIES 6274 FPC ASSY ST SMT	
LI		K. MURAKAMI		A. HAGIWARA		TAPING			
		N. HAYASHI				PART NO. / 型番		04 6274 OXX 000 894 +	
				DWG NO. / 図番				SHEET REV	
				BJS 6274027				2/2 B	